

Popular Electronics®


WORLD'S LARGEST SELLING ELECTRONICS MAGAZINE

AUGUST 1982/\$1.25

Loran-C for Boat Navigating
Math Software for Elf Computers
The State of Stereo TV Sound

SPECIAL FOCUS ON

Home Energy-Saving Applications

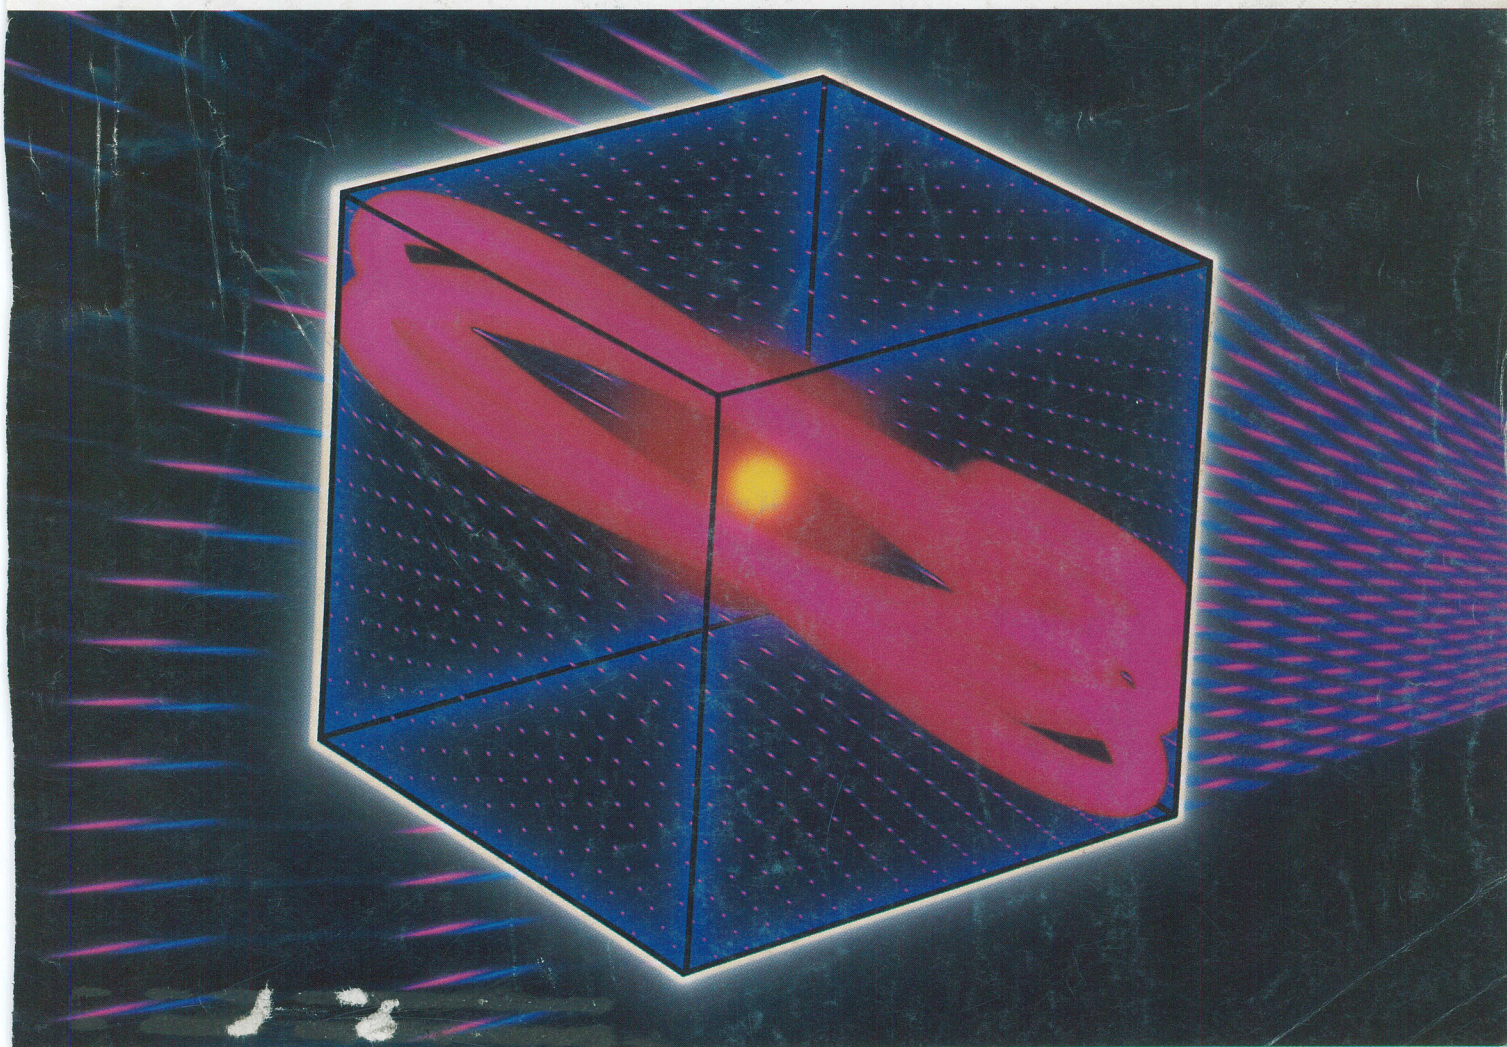

Tested in This Issue:

Toshiba T200-4 Microcomputer
Harman-Kardon PM650 Stereo Amplifier
GE 19PC3708W 19" Color TV Receiver

Kevin

Towne



Someday, in the comfort of your home, you'll be able to shop and bank electronically, read instantly updated newswires, analyze the performance of a stock that interests you, send electronic mail across the country, then play Bridge with three strangers in LA, Chicago and Dallas.



Welcome to someday.

Someday is today with the CompuServe Information Service. CompuServe is available through a local phone call in most major U.S. cities. It connects almost any brand or type of personal computer or terminal with our big mainframe computers and data bases. All you need to get started is an inexpensive telephone coupler and easy-to-use software.

CompuServe's basic service costs only \$5.00 per hour, billed in minute increments to your charge card.

The CompuServe Information Service is available at many computer stores across the country. Check with your favorite computer center or contact CompuServe.


Welcome to someday.

CompuServe

Information Service Division, 5000 Arlington Centre Blvd.
Columbus, Ohio 43220 (614) 457-8650

An H&R Block Company

CIRCLE NO. 9 ON FREE INFORMATION CARD

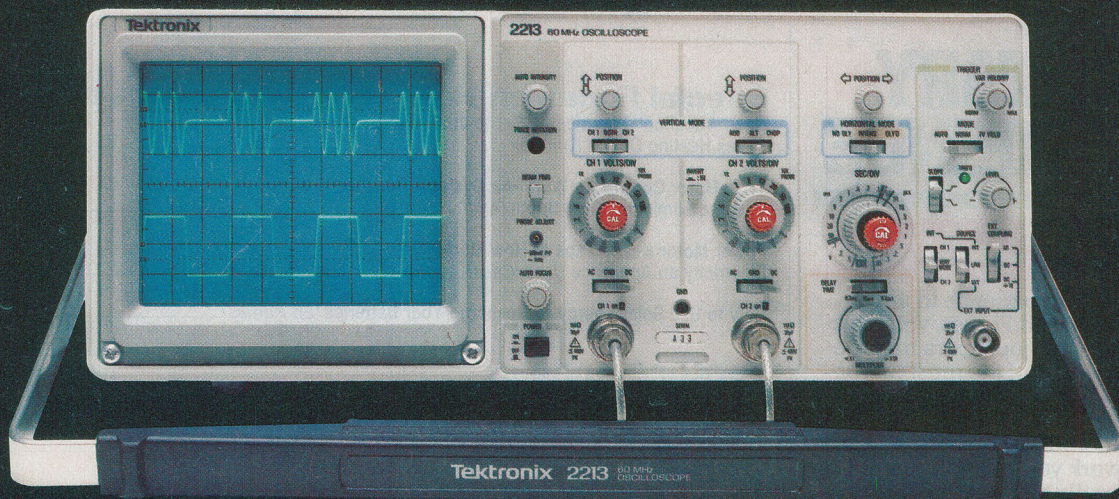

Introducing a direct line to a 60 MHz Tektronix scope built for your bench!

From the world's most respected name in oscilloscopes: a new scope, plus a new direct order number, that finally makes it practical to put Tektronix quality on your bench...at work or home.

Among professional engineers and technicians there is no substitute for the performance and reliability of Tektronix oscilloscopes.

Now, for the first time, Tektronix is offering an advanced scope at an unprecedented low price—and has a direct order line that lets you get your order processed today!

The scope: the 2213. Its radical new design brings you Tektronix quality for well below what you would pay for

lesser-name scopes.

The 2213's practical design includes 65% fewer mechanical parts, fewer circuit boards, electrical connectors and cabling. Result: a lower price for you plus far greater reliability.

Yet performance is pure Tektronix: there's 60 MHz bandwidth for digital and high-speed analog circuits. The sensitivity for low signal measurements. The sweep speeds for fast logic families. A complete trigger system for digital, analog or video waveforms. And new high-performance Tektronix probes are included!

2213 PERFORMANCE DATA

Bandwidth: Two channels, dc—60 MHz from 10 V/div to 20 mV/div. (50 MHz from

2 mV/div to 10 mV/div).

Sweep speeds: Sweeps from 0.5 s to 50 ns (to 5 ns/div with X10 mag).

Sensitivity: Scale factors from 100 V/div (10X probe) to 2 mV/div (1X probe). Accurate to $\pm 3\%$. Ac or dc coupling.

Delayed sweep measurements: Standard sweep, intensified after delay, and delayed.

(Need dual time-base performance and timing accuracy to $\pm 1.5\%$? Ask about our 2215 priced at \$1400.)

Complete trigger system: Modes include TV field, normal, vertical mode, and automatic; internal, external, and line sources; variable holdoff.

Probes: High perform-

ance, positive attachment, 10-14 pF and 60 MHz at the probe tip.

The price: Just \$1100 complete*. Order direct from Tektronix National Marketing Center. Phones are staffed by technical people to answer your questions about the 2213. Your direct order includes a 15-day return policy and full Tektronix warranty.

Now it's easier than ever to get your hands on a Tek scope!

ORDER TOLL-FREE

800-547-1845

Ask for Dept. A0228

(In Oregon, Alaska and Hawaii: 1-503-627-5402 collect.) Lines are open from 8 am EST to 5 pm PST.

*Price F.O.B., Beaverton, OR.

Tektronix®
COMMITTED TO EXCELLENCE

GUARDING YOUR ★ MILITARY EXPERIENCE

EXTRA INCOME

If you have experience in any branch of the Armed Forces, you have the chance to earn good extra income while you hold one of the most important jobs in America. In an Army National Guard unit close to home.

Take income. In the Army National Guard, the work you've put into military service can really go to work for you. For instance, if you left as an E-4 with three years experience, you can earn over \$1500 a year. As an E-5 with 6 years experience, over \$1700. And, if you have a critical skill you may also qualify for a cash bonus. To see exactly how far your rank and experience can take you, check out the chart below.

	PER YEAR (Including) Annual Training
E-3 with 2+ years	\$1375.68
3+ years	1427.34
E-4 with 3+ years	1519.92
4+ years	1630.17
E-5 with 4+ years	1687.11
6+ years	1789.80

Plus, a part-time job in the Army National Guard fits in well with your current lifestyle. Because all it takes is two days a month of your time, along with 15 days annual training. And, in the Guard, you're serving close to home, helping the people in your community and state when natural disasters or emergencies occur.

Extra income that's important to you, in a job that's important to your community. It's just one reason to Guard your military experience in the Army National Guard.

To learn about other reasons— from benefits to new skills—contact your local Guard recruiter, or call toll-free 800-638-7600.

*In Hawaii: 737-5255; Puerto Rico: 723-4450; Virgin Islands (St. Croix): 773-6438; Maryland: 728-3388; in Alaska, consult local phone directory.

**The Guard is
America at its best.**



CIRCLE NO. 5 ON FREE INFORMATION CARD

Popular Electronics®

Special Focus on Home Energy Savings

New "Vacation" Thermostat, Set to Just Above Freezing,
Saves Heating Costs/Tom Fox 48

Triac Motor Control for Warm-Air Systems Reduces Fuel
Use and Eliminates Cool Spots/Anthony Caristi 51

Power Motor Keeps Tabs of How Much
Electricity an Appliance Uses/Cass Lewart 53

How to Use Solar Energy to Recharge Your Batteries/Ed Karns 54

Feature Articles

LORAN-C—A MARINE LONG RANGE NAVIGATION TOOL/Ken Englert 40
Measures precision of coordinates by one-tenth of a mile.

A 16-BIT MATH PACKAGE FOR ELF COMPUTERS/R. Scott Fitzgerald 60
Operates on a minimum configuration of 256 bytes.

Construction Articles

PROGRAMMING EPROM's WITH A SMALL COMPUTER/J. Doolittle and S. Tkalevic 67
Part 2: Construction plans and software information for the EPROM programmer.

Equipment Reviews

HARMAN-KARDON MODEL PM650 INTEGRATED AMPLIFIER 20

GENERAL ELECTRIC MODEL 19PC3708W 19" COLOR TV 22

TOSHIBA MODEL T200-4 COMPUTER SYSTEM 30

TRIPLETT MODEL 7000 UNIVERSAL COUNTER 71

Columns

ENTERTAINMENT ELECTRONICS/Len Feldman 14
Stereo TV is Coming Soon.

COMPUTER BITS/Carl Warren 34
Accessories and Software.

COMPUTER SOURCES/Leslie Solomon 73

SOLID-STATE DEVELOPMENTS/Forrest M. Mims 76
PICs: Photonic Integrated Circuits.

EXPERIMENTER'S CORNER/Forrest M. Mims 80
*Experimenting with Piezoelectric Devices.
Part 2: Piezo-Alerters and Crystal Oscillators.*

PROGRAMMER'S NOTEBOOK/Jim Keogh 84
Drawing Bar Graphs.

PROJECT OF THE MONTH/Forrest M. Mims 90
A Tunable Notch Filter.

Departments

EDITORIAL/Art Salsberg 6
Free Energy.

LETTERS 8

NEW PRODUCTS 10

OPERATION ASSIST 86

PERSONAL ELECTRONIC NEWS 106

COVER GRAPHICS BY STEVEN HUNT

COPYRIGHT © 1982 BY ZIFF-DAVIS PUBLISHING COMPANY. All rights reserved. Popular Electronics (ISSN 0032-4485) August 1982, Volume 20, Number 8. Published monthly by Ziff-Davis Publishing Co., at One Park Ave., New York, NY 10016. Richard P. Friese, President; Selwyn Taubman, Treasurer; Bertram A. Abrams, Secretary. One year subscription rate for U.S. and Possessions, \$15.97; Canada, \$20.97; all other countries, \$23.97 (cash orders only, payable in U.S. currency). Second Class Postage Paid at New York, N.Y. 10016 and at additional mailing offices. Authorized as second class mail by the Post Office Dept., Ottawa, Canada, and for payment of postage in cash. POPULAR ELECTRONICS including ELECTRONICS WORLD, Trade Mark Registered. Indexed in the Reader's Guide to Periodical Literature. Ziff-Davis also publishes Boating, Car and Driver, Cycle, Flying, Popular Photography, Skiing, Stereo Review, Electronic Experimenter's Handbook, and Tape Recording & Buying Guide. **POSTMASTER:** Send address changes to POPULAR ELECTRONICS, Circulation Dept. P.O. Box 2774, Boulder, CO 80302. Please allow at least eight weeks for change of address, enclosing, if possible, an address label from a recent issue. **Permissions:** Material in this publication may not be reproduced in any form without permission. Requests for permission should be directed to John Babcock, Rights and Permissions, Ziff-Davis Publishing Co., One Park Ave., New York, NY 10016.

POPULAR ELECTRONICS

MAXELL IS PLEASED TO PRESENT AN EVEN HIGHER PERFORMANCE TAPE.



If you're familiar with Maxell UD-XL tapes you probably find it hard to believe that any tape could give you higher performance.

But hearing is believing. And while we can't play our newest tape for you right here on this page, we can replay the comments of Audio Video Magazine.

"Those who thought it was impossible to improve on Maxell's UD-XL II were mistaken. The 1981 tape of the year award goes to Maxell XL II-S."

How does high bias XL II-S and our normal bias equivalent XL I-S give you such high performance? By engineering smaller and more uniformly shaped epitaxial oxide particles we were able to pack more into a given area of tape. Resulting in a higher maximum output level, improved signal-to-noise ratio and better frequency response.

To keep the particles from rubbing off on your recording heads Maxell XL-S also has an improved binder system. And to eliminate tape deformation, XL-S comes with our unique Quin-Lok Clamp/Hub Assembly to hold the leader firmly in place.

Of course, Maxell XL II-S and XL I-S carry a little higher price tag than lesser cassettes.

We think you'll find it a small price to pay for higher performance.



IT'S WORTH IT.

Maxell Corporation of America, 60 Oxford Drive, Moonachie, N.J. 07074.CIRCLE NO. 31 ON FREE INFORMATION CARD

ZX81



Introducing the Sinclair ZX81.

If you're ever going to buy a personal computer, now is the time to do it.

The Sinclair ZX81 is the most powerful, yet easy-to-use computer ever offered for anywhere near the price:

only \$99.95* completely assembled.

Don't let the price fool you. The ZX81 has just about everything you could ask for in a personal computer.

A breakthrough in personal computers.

The ZX81 is a major advance over the original Sinclair ZX80 – the first personal computer to break the price barrier at \$200.

In fact, the ZX81's 8K extended BASIC offers features found only on computers costing two or three times as much.

Just look at what you get:

- Continuous display, including moving graphics

THE \$99.95 PERSONAL COMPUTER.

- Multi-dimensional string and numerical arrays
- Mathematical and scientific functions accurate to 8 decimal places
- Unique one-touch entry of key words like PRINT, RUN and LIST
- Automatic syntax error detection and easy editing
- Randomize function

useful for both games and serious applications

- 1K of memory expandable to 16K
- A comprehensive programming guide and operating manual

The ZX81 is also very convenient to use. It hooks up to any television set to produce a clear 32-column by 24-line display. It comes with a comprehensive programming guide and operating manual designed for both beginners and experienced computer users. And you can use a regular cassette recorder to store and recall programs by name.

Order at no risk.**

We'll give you 10 days to try out the ZX81. If you're not completely satisfied, just return it to Sinclair Research and we'll give you a full refund.

And if you have a problem with your ZX81, send it to Sinclair Research within 90 days and we'll repair or replace it at no charge.

Introducing the ZX81 kit.

If you really want to save money, and you enjoy building electronic kits, you can order the ZX81 in kit form for the incredible price of just \$79.95.* It's the same, full-featured computer, only you put it together yourself. We'll send complete, easy-to-follow instructions on how you can assemble your ZX81 in just a few hours. All you have to supply is the soldering iron.

A leader in microelectronics.

The ZX81 represents the latest technology in microelectronics. More than 10,000 are sold every week. In fact, the ZX81 is the fastest selling personal computer in the world.

We urge you to place your order for the ZX81 today.

To order.

To order, simply call toll free. Or use the coupon below. Remember, you can try it for 10 days at no risk.** The sooner you order, the sooner you can start enjoying your own computer.


Call toll free 800-543-3000.

Ask for operator #509.
In Ohio call: 800-582-1364;
in Canada call: 513-729-4300.
Ask for operator #509. Phones open 24 hours a day, 7 days a week. Have your MasterCard or VISA ready.

These numbers are for orders only. If you just want information, please write: Sinclair Research Ltd., 2 Sinclair Plaza, Nashua, NH 03061.

*Plus shipping and handling. Price includes connectors for TV and cassette, AC adaptor, and FREE manual.

**Does not apply to ZX81 kits.



NEW SOFTWARE: Sinclair has published pre-recorded programs on cassettes for your ZX81. We're constantly coming out with new programs, so we'll send you our latest software catalog with your computer.



16K MEMORY MODULE: Like any powerful, full fledged computer, the ZX81 is expandable. Sinclair's 16K memory module plugs right onto the back of your ZX81. Cost is \$49.95, plus shipping and handling.

sinclair

To order call toll free: 800-543-3000

Ad Code	08PEOS	Price*	Qty.	Amount
ZX81		\$99.95		
ZX81 Kit		79.95		
16K Memory Module		49.95		
Shipping and Handling		4.95		\$4.95
TOTAL				

MAIL TO: Sinclair Research Ltd.,
One Sinclair Plaza, Nashua, NH 03061.

Name _____

Address _____

City _____ State _____ Zip _____

*U.S. dollars





EDITORIAL

Free Energy

Many people point to the sun as a source of free energy. It really isn't, of course, just as hydro power and wind power aren't free. Converting these energy sources requires the expenditure of much money, which in many instances is not as economical as employing fossil fuels and their accompanying converters.

We're all fascinated by the sun, naturally, and anticipate that at some distant time there will be an economic crossover point where it would pay to make more use of it. However, solar power is indeed being used today for a variety of purposes, though it still represents a very minor source of energy.

As you know, there are tax breaks available to sweeten the cost of voluntary use of solar power for home space heating and for hot-water heating. The basic reason for this incentive is to diminish the use of oil, a significant portion of which is imported at high cost. Given such an allowance, it is claimed that the system saves money for energy use after a moderate period of time for amortization of new equipment and installation costs.

But it is subsidized by our taxes.

Feasibility studies are being made for an attractive, science-fiction-like possibility for solar power generation from large satellites. These satellites would be exposed to continuous sunlight, collecting solar energy and transmitting it through microwaves to collection points on earth. It is said, however, that such an undertaking would be the costliest technological venture ever attempted.

At present, the greatest saving in energy appears to be through conservation in one form or another. This route is represented by using less energy through buying automobiles with better gas mileage, eliminating unnecessary automobile trips, raising air conditioning thermostats in the summer and lowering heating thermostats in the winter, buying appliances that consume less energy, and by automatic energy management.

The latter approach is explored in this issue by a few interesting, innovative articles. One reduces fuel use through a more efficient heat-system blower-motor control. Another presents plans for a novel

thermostat that can be set well below the traditional 55°F minimum of standard thermostats. Also in this home energy-saving focus are an inexpensive electric power meter that tells you quickly how much electricity any appliance consumes and ways to use photovoltaic cells to recharge batteries using the sun as the power source.

Should you want to explore solar power further, a recent book, the "Photovoltaic Product Directory and Buyers Guide," will give you a good working knowledge on the subject for use in a home. (Order #DE81030186, \$13.50, from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.)

Art Salsberg

Popular Electronics

JOE MESICS
Publisher

ARTHUR P. SALSBERG
Editorial Director

DONALD MENNIE
Executive Editor

LESLIE SOLOMON
Technical Director

JOHN R. RIGGS
Managing Editor

EDWARD I. BUXBAUM
Art Director

JOSEPH DESPOSITO
Technical Editor

STANLEY VEIT
Computer Editor

DAVID M. WEBER
Features Editor

ANDRE DUZANT
Technical Illustrator

CARMEN ROBLES
Production Editor

JEFF NEWMAN
Editorial Assistant

Contributing Editors:
Walter Buchsbaum,
Len Feldman, Glenn Hauser, Julian Hirsch
Jim Keogh, Forrest Mims

MARIE MAESTRI
Executive Assistant

Editorial and Executive Offices
One Park Avenue
New York, New York 10016
212 725-3500

Publisher
Joe E. Mesics
212 725-3568

New York Office
Advertising Director:
Richard Govatski 212 725-7460

Sales:
Tom Ballou 212 725-3578
Ken Lipka 212 725-3580

Midwestern Office
Suite 1400, 180 N. Michigan Ave.,
Chicago, IL 60601 312 346-2600
Sales: Ted Welch

Western Representative
Norman S. Schindler & Associates, Inc.
7050 Owensmouth Ave., #209
Canoga Park, CA 91303 213 999-1414
Sales: Norm Schindler

Representation in Japan
J.S. Yagi
Iwai Trading Co., Ltd.
603 Ginza Sky Heights Bldg.
18-13, Ginza 7-Chome
Tokyo, Japan 104

Ziff-Davis Publishing Company

Richard P. Friese President
Albert S. Traina President, Consumer Magazine Division

Furman Hebb Executive Vice President
Phillip T. Heffernan Senior Vice Presidents
Sidney Holtz

Edward D. Muhlfeld
Philip Sine Vice Presidents
Robert Bavier
Paul Chook

Baird Davis
George Morrissey
Selwyn Taubman Treasurer
Bertram A. Abrams Secretary

Editorial correspondence: POPULAR ELECTRONICS, 1 Park Ave., New York, NY 10016. Editorial contributions must be accompanied by return postage and will be handled with reasonable care; however, publisher assumes no responsibility for return or safety of manuscripts, art work, or models submitted.

The publisher has no knowledge of any proprietary rights which will be violated by the making or using of any items disclosed in this issue.



Member Audit Bureau
of Circulations

Explore the excellence of your ZX81 with a

MEMOPAK

MEMOPAK

MEMOPAK

MEMOPAK

MEMOPAK



MEMOPAK 64k memory extension for **\$179.95** Give your diminishing memory more byte.

MEMOPAK 64K RAM \$179.95

The Sinclair ZX81 has revolutionized home computing. The MEMOPAK 64K RAM extends the memory of ZX81 by a further 56K to a full 64K. It is neither switched nor paged and is Directly Addressable. The unit is user transparent and accepts such basic commands as 10 DIM A (9000). It plugs directly into the back of ZX81 and does not inhibit the use of the printer or other add-on units. There is no need for an additional power supply or leads.

Description of memory

0-8K . . . Sinclair ROM

8-16K . . . This section of memory switches in or out in 4K blocks to leave space for memory mapping, holds its contents during cassette loads, allows communication between programs, and can be used to run assembly language routines.

16-32K . . . This area can be used for basic programs and assembly language routines.

32-64K . . . 32K of RAM memory for basic variables and large arrays. With the MEMOPAK 64K extension the ZX81 is transformed into a powerful computer, suitable for business, leisure and educational use, at a fraction of the cost of comparable systems.

MEMOTECH
Memory Extension Specialists

Memotech Corporation
7550 West Yale Ave., Suite 200
Denver, Colorado 80227
Ph. (303) 986-1516

MEMOPAK 16K RAM \$59.95

With the addition of MEMOPAK 16K, your ZX81 will have a full 16K of Directly Addressable RAM. It is neither switched nor paged and enables you to execute longer and more sophisticated programs and to hold an extended data base.

The 16K and 64K Memopaks come in attractive, custom-designed and engineered cases which fit snugly on to the back of the ZX81 giving a firm connection.

Free service on your MEMOPAK

Within the first six months, should anything go wrong with your MEMOPAK, return it to us and we will repair or replace it free of charge.

Try MEMOPAK with no obligation

You can use our MEMOPAK in your home without obligation. After 10 days if you are not completely satisfied, simply return it for a full refund.

Coming soon

A complete range of ZX81 plug-in peripherals:

MEMOTECH Hi-Res Graphics
MEMOTECH Digitising Tablets
RS232 Interface
Centronic Interface and
Software Drivers

All these products are designed to fit "piggy-back" fashion on to each other and use the ZX81 power supply.

Further information forthcoming.

Memotech Corp. 7550 W. Yale Ave. Suite 220 Denver, Colo. 80227

Yes! I would like to try the Memopak. I understand that if I'm not completely satisfied, I can return it in 10 days for a full refund.

	Price †	Qty.	Amount
<input type="checkbox"/> Check	Memopak 64k RAM	\$ 179.95	
<input type="checkbox"/> Visa	Memopak 16k RAM	\$ 59.95	
<input type="checkbox"/> MC	Shipping and Handling	\$ 4.95	\$ 4.95
Total			

Act. No. Exp. † U.S. Dollars

Name

Street

City State Zip

PE08

How to put the big board on a small screen.

To take stock of the situation, an investor could use the IBM Personal Computer. With our Dow Jones™ Reporter,* a device called a modem† and a telephone, you can access Wall Street and the world.

Tap the Dow Jones News/Retrieval Service‡ for historical and current stock quotes—day or night. (Use our Dow Jones Reporter not only for easy access, but to save money on connect time.)

Pull 10K extracts of over 6,000 companies.

Get industry news.

Even enjoy sports news when you've had your fill of business.

To better manage your portfolio, visit an authorized IBM Personal Computer dealer. And learn how a small IBM investment can give you a high yield in quality, power and performance.

IBM



The IBM Personal Computer A tool for modern times

For a store near you (or for information from IBM about quantity purchases) call (800) 447-4700. In Illinois, (800) 322-4400. In Alaska or Hawaii, (800) 447-0890. *Dow Jones is a trademark of Dow Jones & Company, Inc. †Not supplied by IBM.

CIRCLE NO. 23 ON FREE INFORMATION CARD

LETTERS

Computer Comparisons

I liked the article "Computers—Which One Is for You" in the May issue. I particularly enjoyed the fact that you compared the user features of the computers rather than covering the technical and hardware features only. It was the best comparison of computers I have seen.—*T. Sunday, Klamath Falls, OK.*

Macro-Editor/Assembler Availability

I enjoyed the excellent review of the TRS-80 Model III computer in your May issue, but I believe there was an error with regard to availability of software. Radio Shack does not carry a Macro-Editor/Assembler for the Model III at this time. However, a Macro-Editor/Assembler, called M-ZAL, that is compatible with the Model III, is available from our company.—*D. C. Willen, President, Computer Applications Unlimited, Box 214, Rye, NY 10580.*

Wrong Flip-Flop Answer?

In "Learning Quizzes for Electronics" (May 1982), the Flip-Flop Quiz seems to contain an error. In question 3, since the J input received the last pulse and a clock pulse occurred too, shouldn't the flip-flop's Q output have been a 1 instead of a 0.—*R. A. Finnegan, Merrick, NY.*

It seems that your view of the starting time of the input pulses was different from what the author intended. He started the timing with zero at the left. You obviously interpreted it to be on the right. It would have been clearer if we had included a time scale.—Ed.

Likes Program Development Board

I recently finished building the CPU module and Program Development Board from the series "Designing with the 8080 Microprocessor" by Randy Carlstrom. I have programmed big machines (such as the IBM 3089) and I was interested in learning about microcomputers. The material in the articles was well presented and the features available on the PDB left little to be desired. Keep up the good work and let's see more of this type of article.—*Robert Cox, Jacksonville, FL.*

OUT OF TUNE

In "Enhance TV Sound with Stereo" (May 1982), the resistance for R24 and R25 in the Parts List should have been 390 ohms, as it was on the schematic.

In "Learning Quizzes for Electronics" (June, p 70), in the Digital Counter Quiz, the note reading "FF₁ is initially turned on" should have been with part 2 of the quiz not part 1.

Why use their flexible discs:

BASF, Control Data, Dysan, IBM, Kybe, Maxell,
Nashua, Scotch, Syncom, Verbatim or Wabash
when you could be using

MEMOREX

high quality error free discs?

Product Description	Part #	CE quant. 100 price per disc (\$)
8" SSSD IBM Compatible (128 B/S, 26 Sectors)	3062	2.09
8" SSSD Shugart Compatible, 32 Hard Sector	3015	2.09
8" SSSD CPT 8000 Compatible, Soft Sector	3045	2.99
8" SSDD IBM Compatible (128 B/S, 26 Sectors)	3090	2.74
8" DSDD Soft Sector (Unformatted)	3102	3.34
8" DSDD Soft Sector (128 B/S, 26 Sectors)	3115	3.34
8" DSDD Soft Sector (256 B/S, 26 Sectors)	3103	3.34
8" DSDD Soft Sector (512 B/S, 15 Sectors)	3114	3.34
8" DSDD Soft Sector (1024 B/S, 8 Sectors)	3104	3.34
5 1/4" SSDD Soft Sector w/Hub Ring	3481	2.34
5 1/4" SSDD 10 Hard Sector w/Hub Ring	3483	2.34
5 1/4" SSDD 16 Hard Sector w/Hub Ring	3485	2.34
5 1/4" DSDD Soft Sector w/Hub Ring	3491	3.09
5 1/4" DSDD 10 Hard Sector w/Hub Ring	3493	3.09
5 1/4" DSDD 16 Hard Sector w/Hub Ring	3495	3.09
5 1/4" SSDD Soft Sector w/Hub Ring (96 TPI)	3504	2.99
5 1/4" DSDD Soft Sector w/Hub Ring (96 TPI)	3501	3.99

SSSD = Single Sided Single Density; SSDD = Single Sided Double Density
DSDD = Double Sided Double Density; TPI = Tracks per inch

Memorex Flexible Discs... The Ultimate in Memory Excellence

Free Memorex Mini-Disc Offer - Save 10%

Every carton of 10 Memorex 5 1/4 inch mini-discs sold by Communications Electronics, now has a coupon good for a free Memorex mini-disc. For every case of 100 Memorex mini-discs you buy from CE, you'll get 10 free mini-discs directly from Memorex. There is no limit to the number of discs you can purchase on this special offer. This offer is good only in the U.S.A. and ends on December 31, 1982.

Quality

Memorex means quality products that you can depend on. Quality control at Memorex means starting with the best materials available and continual surveillance throughout the entire manufacturing process. The benefit of Memorex's years of experience in magnetic media production, resulting, for instance, in proprietary coating formulations. The most sophisticated testing procedures you'll find anywhere in the business.

100 Percent Error Free

Each and every Memorex Flexible Disc is certified to be 100 percent error free. Each track of each flexible disc is tested, individually, to Memorex's stringent standards of excellence. They test signal amplitude, resolution, low-pass modulation, overwrite, missing pulse error and extra pulse error. Rigid quality audits are built into every step of the manufacturing process and stringent testing result in a standard of excellence that assures you, our customer, of a quality product designed for increased reliability and consistent top performance.

Customer-Oriented Packaging

The desk-top box containing ten discs is convenient for filing and storage. Both box labels and jacket labels provide full information on compatibility, density, sectoring, and record length. Envelopes with multi-language care and handling instructions and color-coded removable labels are included. A write-protect feature is available to provide data security.

Full One Year Warranty — Your Assurance of Quality
Memorex Flexible Discs will be replaced free of charge by Memorex if they are found to be defective in materials or workmanship within one year of the date of purchase. Other than replacement, Memorex will not be responsible for any damages or losses (including consequential damages) caused by the use of Memorex Flexible Discs.

Quantity Discounts Available

Memorex Flexible Discs are packed 10 discs to a carton and 10 cartons to a case. Please order only in increments of 100 units for quantity 100 pricing. We are also willing to accommodate your smaller orders. Quantities less than 100 units are available in increments of 10 units at a 10% surcharge. **Quantity discounts** are also available. Order 500 or more discs at the same time and deduct 1%; 1,000 or more saves you 2%; 2,000 or more saves you 3%; 5,000 or more saves you 4%; 10,000 or more saves you 5%; 25,000 or more saves you 6%; 50,000 or more saves you 7% and 100,000 or more discs earns you an 8% discount off our super low quantity 100 price. Almost all Memorex Flexible Discs are immediately available from CE. Our warehouse facilities are equipped to help us get you the quality product you need, when you need it. If you need further assistance to find the flexible disc that's right for you, call the Memorex compatibility hotline. Dial toll-free 800-538-8080 and ask for the flexible disc hotline extension 0997. In California dial 800-672-3525 extension 0997. Outside the U.S.A. dial 408-987-0997.

Buy with Confidence

To get the fastest delivery from CE of your Memorex Flexible Discs, send or phone your order directly to our Computer Products Division. Be sure to calculate your price using the CE prices in this ad. Michigan residents please add 4% sales tax. Written purchase orders are accepted from approved government agencies and most well rated firms at a 30% surcharge for net 30 billing. All sales are subject to availability, acceptance and verification. All sales are final. Prices, terms and specifications are subject to change without notice. Out of stock items will be placed on backorder automatically unless CE is instructed differently. Minimum prepaid order \$50.00. Minimum purchase order \$200.00. International orders are invited with a \$20.00 surcharge for special handling in addition to shipping charges. All shipments are F.O.B. Ann Arbor, Michigan. No COD's please. Non-certified and foreign checks require bank clearance.

Mail orders to: Communications Electronics, Box 1002, Ann Arbor, Michigan 48106 U.S.A. Add \$8.00 per case or partial-case of 100 8-inch discs or \$6.00 per case or partial case of 100 5 1/4-inch mini-discs for U.P.S. ground shipping and handling in the continental U.S.A. If you have a Master Card or Visa card, you may call anytime and place a credit card order. Order toll-free in the U.S. Dial 800-521-4414. If you are outside the U.S. or in Michigan, dial 313-994-4444. Order your high quality, error free Memorex discs today.

Copyright © 1982 Communications Electronics™

Ad #051782


CIRCLE NO. 1 ON FREE INFORMATION CARD

Free disc offer Save 10%



Order Toll-Free!
(800) 521-4414

In Michigan (313) 994-4444

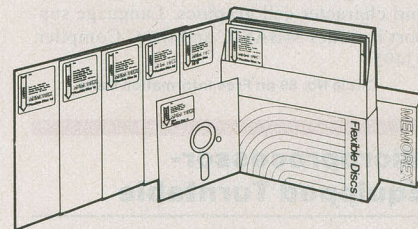

For Data Reliability—Memorex Flexible Discs

**COMMUNICATIONS
ELECTRONICS™**


Computer Products Division

854 Phoenix □ Box 1002 □ Ann Arbor, Michigan 48106 U.S.A.
Call TOLL-FREE (800) 521-4414 or outside U.S.A. (313) 994-4444

NEW PRODUCTS

Additional information on new products covered in this section is available from the manufacturers. Either circle the item's code number on the Free Information Card or write to the manufacturer at the address given.

DEC Personal Computer

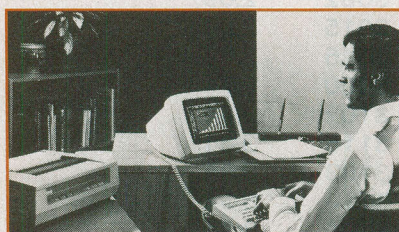

The Rainbow 100, Digital Equipment Corp.'s entry in the personal computer field, is designed to run both 8- and 16-bit application software from a wide variety of independent suppliers. These include the Select Information Systems Word Processor, Microsoft's Multiplan Spread Sheet Calculator, and the Mark Williams Co. "C" Compiler. The Rainbow 100 will run a hybrid version of the CP/M-80 and CP/M-86 and can use other operating systems such as Microsoft's MS-DOS, the same as IBM and others. DEC has also provided an advanced communications package to enable the Rainbow 100 to transmit from a CP/M file to a host computer and vice versa. It uses Z80 and 8088 microprocessors and has a maximum of 256K bytes of memory. The mass data storage is 800K bytes in 5¼" double-density, dual drives. This can be expanded to 1.6M bytes of floppy-disk storage or 5M bytes of Winchester disk storage. The CRT display is a 12" monochrome of 24 lines by 80 or 132 characters. Options include a 5¼", 5M-byte external hard disk, a color video monitor and character cell graphics. Language support includes MBASIC and the C Compiler. \$3495.

Circle No. 89 on Free Information Card

Microprocessor-Equipped Turntable


The Denon DP-52F turntable uses a microprocessor to control arm motion, motor speed, record sensing, and ON/OFF functions. A servo mechanism is reported to continuously adjust tracking force and anti-skating pressure for optimum stylus-disc contact, correcting for warps and resonance. The DP-52F has an ac servo-motor direct-drive platter with magnetic-pulse speed monitoring, and automatic sensing of the



presence and size of a record. A smoked acrylic dust cover is provided. Control pads include a REPEAT button. Wow and flutter is rated at 0.012%; rumble at -78 dB. Dimensions are 17.9" W × 5.1" H × 16.7" D. \$525.

Circle No. 90 on Free Information Card


Wahl Soldering Station

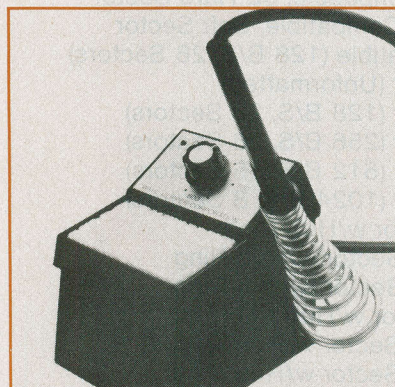

The Iso-Tip 7470 Micro Soldering Station is reported to eliminate continuous switching (and the voltage spikes that can damage electrical equipment) by maintaining an even tip temperature. The unit is totally grounded and can be adjusted to any temperature between 500° and 700°F. It comes with a sponge holder, tip-wiping sponge, soldering iron, and stand (which takes up 12 sq. in. of bench space).

Circle No. 91 on Free Information Card

Bose Speakers

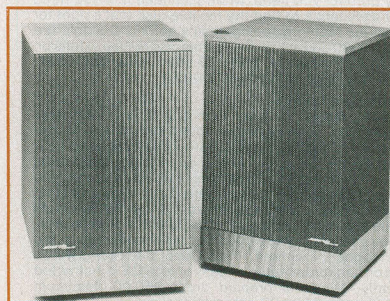

The 501 Series III Direct/Reflecting loudspeakers from Bose are floor-standing units with a dual-frequency crossover network. According to Bose, woofers and tweeters are allowed to operate simultaneously over more than a full octave, thereby avoiding the effects of phase shift. There are two separate


protection systems: a current-sensitive circuit for the tweeters and a thermal overload circuit for the woofer. If the circuits detect an energy level high enough to cause damage, they absorb the excess power without interrupting the music. The drivers consist of one 10" woofer and two 3" tweeters (inward and outward "firing"). Nominal impedance is 8 ohms; crossover transition frequencies are 1.5 kHz and 2.5 kHz; power rating is 20 W min., 100 W max. Cabinet is walnut-grain vinyl veneer and dimensions are 24"H × 14½"W × 14½"D. \$680 per pair.

Circle No. 92 on Free Information Card

A/D System for Apple

Applied Engineering announces availability of a memory-buffered analog/digital system for all versions of the Apple computer. Called the A/D Board, this peripheral consists of an eight-bit successive-approximation A/D converter, an eight-channel multiplexer, and an 8 × 8 RAM. A/D conversion takes place on a continuous channel-sequencing basis, and data is automatically transferred to an on-board memory at the end of each conversion. The converter has a speed rated at 0.078 ms/channel, a full-scale voltage range from ±5 to ±15 V dc and an operating temperature from 0° to 70°C. Accuracy is given as 0.3%. Applications include monitoring ambient weather conditions, light intensity, pressure, rpm, etc. \$129.

PC Board Holder

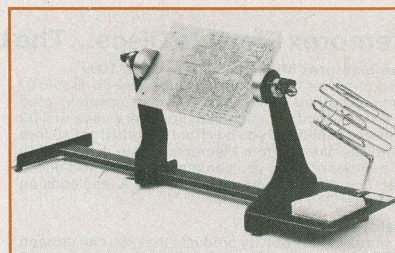

The PCBH-50 from OK Machine and Tool Co. is designed for use as a printed circuit board holder and solder station. The unit is spring-loaded for easy board removal and a self-locking end support adjusts to different board widths (up to 10" × 12"). A board can be rotated 360° and locked at any angle. Also included is a soldering iron holder and a cleaning tip sponge. The PCBH-50 can be either free-standing or mounted on a workbench.

Circle No. 94 on Free Information Card

Rechargeable Video Battery Pack

Cinema IV's Porta-Power II battery pack is reported to permit the simultaneous use of a video camera, VCR, and halogen spotlight. A built-in voltmeter determines the remain-

THE PROBLEM:

**BURGLARY
HOLD-UP**

**MEDICAL
FIRE**



SOLUTION:

**PROTECT YOUR HOME
AND BUSINESS WITH A
PROFESSIONAL SECURITY SYSTEM
BEFORE YOU'RE THE VICTIM!!**

**HOW MUCH COULD I SAVE WITH A GUARDEX SYSTEM?
WHAT TYPE OF SYSTEM IS BEST FOR ME?
BURGLARY, HOLD-UP, MEDICAL OR FIRE?**

We have security consultants available to review your needs right over the telephone. Our toll free numbers are listed below. Our new Guardex 4300 professional security system can be tailored for almost every requirement. The Guardex 4300 can monitor for burglary **plus** your choice of hold-up, medical emergency or fire.

WHAT IS THE GUARDEX 4300 SYSTEM?


The Guardex 4300 system is built around the 4300 microprocessor-communicator control panel. To the 4300 control panel you add wireless sensors for doors and windows, infrared motion detectors, photoelectric smoke detectors and emergency panic buttons. All the sensor/transmitters operate up to a year on a 9 volt radio battery and require no wiring to the control panel.

HOW DOES A CENTRAL STATION ALARM WORK?

When a burglary, fire or medical sensor is tripped, a signal is sent to the control panel up to 200 feet away. The control panel starts a siren screaming and starts an electronic telephone dialer programmed to call our central monitoring station. The receiver at our central station decodes the telephone message and displays the type of emergency to the operator. Stored in the computer is all the information required to dispatch for each emergency. Within seconds, your local Police Department, Fire Department or Paramedics have been notified.



The central station is staffed 24 hours a day, 7 days a week with trained personnel to quickly dispatch emergency services. We can monitor your home or business anywhere in the continental United States over toll free WATS lines.

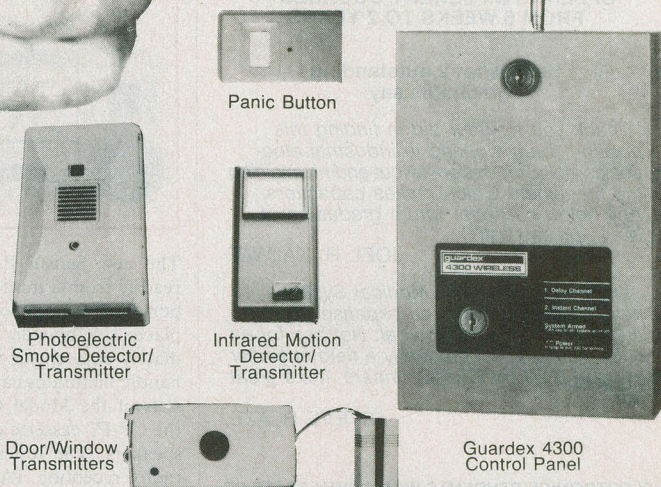

SIMPLE INSTALLATION - SIMPLE TO OPERATE

The biggest cost of most central monitored security systems is all the labor to completely wire the building. With the wireless Guardex 4300 system **you** can install the complete system in less than an hour with only a screwdriver. (If you're not the handyman type, installations are available in many areas.)

Guardex 4300 Control Panel - \$499.95

Includes backup battery and power supply.

Door/Window Transmitters, Magnetic Switch - \$43.45 ea.

Infrared Motion Detector/Transmitter - \$179.95

Photoelectric Smoke Detector/Transmitter - \$89.95

Emergency Medical/Hold-up Panic Button - \$39.95

Siren with 50 Feet of Wire - \$39.95

DEALERS NEEDED

Make money installing our alarms in your area. If you have a general knowledge of electronic equipment and take pride in your work, call us to see if your area is still available. Work part time or full time, evenings and weekends call and ask for Field Installation Department.

30 Day Money Back Guarantee - 1 Year Warranty

**SPECIAL LIMITED TIME OFFER!! ORDER A
SYSTEM OVER \$900.00 AND RECEIVE ONE
YEAR MONITORING FREE!**

(Regular price at \$19.95 per month is \$239.40.)

It's like getting a 26% discount on your system!

**GUARDIAN
ELECTRONICS, INC.**

VISA

master charge
THE INTERBANK CARD

Call during California business hours for your no obligation consultation.

Outside CA Toll Free (800) 423-5499

Inside CA Collect (213) 889-1414

31117 W. Via Colinas, PE • Westlake Village, CA 91362

CIRCLE NO. 21 ON FREE INFORMATION CARD

TRAIN FOR ONE OF THESE MONEY-MAKING CAREERS!

**ELECTRONICS TECHNICIAN •
COMPUTER PROGRAMMER •
TELECOMMUNICATIONS INSTALLER •
TECHNICIAN • ELECTRONIC
EQUIPMENT SERVICEMAN • CABLE
TV INSTALLER**

**17 SCHOOLS FROM COAST TO COAST
OFFER 15 DIFFERENT COURSES —
FROM 6 WEEKS TO 2 YEARS**

**Read what 2 outstanding
graduates say:**

"Thank you for your aid in finding this position. I am working in industrial electronics including design, layout and maintaining the machinery which makes capacitors. Any help I can offer future graduates of N.I.T., please call."

JOEL R. KALWAT


"I'm working for G.E. Medical Systems. I have a company car, an expense account, and made \$27,000 this year. Not bad for an N.I.T. student. I'm presently a field engineer support CT/T (or CAT) Scanners. It's a great job."

STEVE BLAZE

**ELECTRONICS STUDENTS WORK WITH STATE OF
THE ART TRAINING EQUIPMENT.**



**Keithley's Model 130
Digital Multimeter** ...
rugged and reliable.
Issued to all EET students.



Hitachi Oscilloscopes ...
a stable, reliable display to
test the circuits you build
in N.I.T. labs.

**SEND FOR FREE FACTS
NO cost or obligation!**



**National Institute
of Technology_{SM}**

MAIL COUPON TODAY!

NATIONAL INSTITUTE OF
TECHNOLOGY, DEPT. MPC82
1701 West Euless Blvd. Suite 320,
Euless, TX 76039

- ☐ I am interested in your brochure of
career courses in electronic engineer-
ing technology
- ☐ I am interested in career information
on computer programming.

NAME _____ AGE _____

ADDRESS _____

CITY/STATE/ZIP _____

LAST GRADE COMPLETED _____

VETERAN _____


TELEPHONE NO. _____

CIRCLE NO. 34 ON FREE INFORMATION CARD

new products

ing running time; and the charger recharges the 12-V/11.3-A battery in 12 to 16 hours. In addition, the unit has a circuit breaker built-in and can be used with an auto charge cord (optional) to charge the battery from an automobile cigarette lighter socket. Dimensions are 7½" × 8" × 2½"; weight is 9 lb. \$200. Address: Cinema IV, P.O. Box 1045, Newport Beach, CA 92663.

Compact Audio System

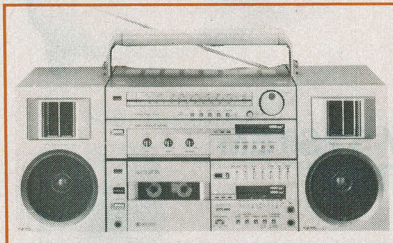

The new Sansui P-Compo CP-5 converts readily from a mini-component system to a portable. Components can be stacked or placed side-by-side, with the speakers immediately adjacent or widely separated. A top handle facilitates carrying. The system consists of the Model CP-R5 tuner/amplifier, the CP-F7 cassette deck, and 4" bass reflex speakers. The tuner/amp offers four-band radio reception (AM, FM, SW1, SW2), quartz-synthesizer tuning, and 13 W/ch output. The amplifier section features a bridged output circuit with direct coupling. The deck has IC logic controls, automatic program search, record mute, and Dolby noise reduction. In addition, there are 5-LED level indicators, a timer/standby mechanism, a tape counter, a three-position tape selector, and a self-contained design that permits listening to the deck on its own. Wow and flutter is rated at 0.05%, and S/N at 54 dB with metal tape without Dolby. \$490.

CIRCLE NO. 95 ON FREE INFORMATION CARD

Two New Terminals from Hazeltine




Hazeltine has introduced two new computer terminals—the Executive 10 and the Esprit II. The former (\$1195) features eight programmable function keys, a split-screen display, and a business graphics character set. It also has a programmable 25th status line and a full set of editing features. The Esprit

II (\$645) is the latest in a low-cost line of terminals, featuring editing capabilities, character insert/delete, and local print. It is buffered and can display the full 128-character ASCII code.

CIRCLE NO. 96 ON FREE INFORMATION CARD

Linear-Tracking Phono Cartridge

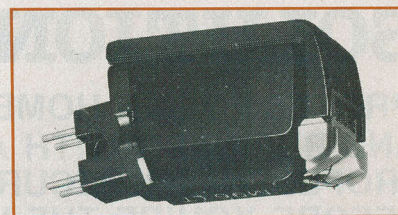

Shure Brothers has announced a new direct plug-in phono cartridge especially designed for use with linear-tracking turntables. Designated Model M96LT, it has a telescoped shank structure and a lightweight magnet reported to give a frequency response flat from 20 to 20,000 Hz. The cartridge has a bi-radial elliptical diamond stylus that tracks at 1.25 g. \$80.

CIRCLE NO. 97 ON FREE INFORMATION CARD

TV Satellite Receiver



A new satellite receiver, the System 7, has been announced by Lowrance Electronics. It provides detent tuning, in conjunction with automatic frequency control tuning, for quick channel selection. If fine tuning is needed, states the manufacturer, it typically spans only one transponder to prevent channel crosstalk. An optional remote control is also available. The audio section has selectable tuning for 6.2 and 6.8 MHz and can receive stereo broadcasts, as well as the usual mono. The System 7 also has a signal strength meter, direct audio and video outputs with a video invert switch, and a built-in modulator selectable for channels 3 or 4. I-f frequency is 70 MHz, with a 30-MHz bandwidth. \$1325.

CIRCLE NO. 98 ON FREE INFORMATION CARD


Cassette Deck Cleaner

Allsop's new Ultraline Cassette Deck cleaning system (Model 71300) features cartridge-mounted independent cleaning felts that can individually clean heads, capstans, and pinch rollers. A gear-driven wiper arm, upon which the head-cleaning felt is mounted, is said to increase the versatility of the

cleaner by assuring uniform cleaning of all types of cassette decks, including those with three-motor drives and takeup-reel sensors. Equipped with two sets of capstan pinch roller felts, the Ultraline is also suitable for auto-reverse decks. The cassette cleaner includes a 1/2-oz bottle of Allsop cleaning solution. \$10.


CIRCLE NO. 99 ON FREE INFORMATION CARD

Floppy Drive Tester

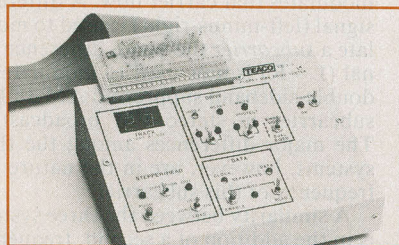

TEACO'S CD2-3 is said to offer the user of floppy drives three levels of testing: isolation of the drive from computer problems; a check of the chasis components and their mechanical operation; and troubleshooting of the component level on the circuit board. The unit's capabilities include: testing of single- or dual-sided drives, testing of all tracks (with a 0.5" track counter), single-step or continuous testing, head load troubleshooting, dynamic indication of index pulse rate, "Ready Status" display, separate testing of clock and data functions, and erasure verification. \$275. Address: The Computer Center, Div. of TEACO INC., P.O. Box E, Michigan City, IN 46360.


Amplifier with Built-in Equalizer

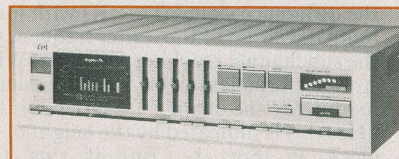

The A-X50 stereo integrated amplifier from JVC is equipped with a five-band SEA graphic equalizer rather than the customary bass/treble tone controls, with each control adjusting narrow-frequency bands centered at 63, 250, 1000, and 16,000-Hz. A peak indicator is calibrated to correspond to the five center frequencies of the equalizer and to show each response on a fluorescent display. Also shown are right and left total response and the aggregate response for both channels. Other features include a selector for MM or MC phono cartridges, a touch volume up-down control, and a muting switch. Its "Super-A" circuit design is said to provide the advantages of class-A operation at higher efficiency. The amplifier has a rated output power of 65 W/ch into 8 ohms from 20 to 20,000 Hz with a THD of 0.007%. Intermodulation distortion is given 0.005% at rated output. \$430.

CIRCLE NO. 100 ON FREE INFORMATION CARD


Computer Static Mat

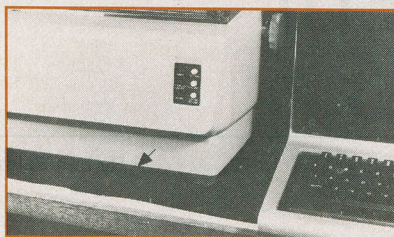


Designed to drain away static electricity before it can cause any damage to voltage-sensitive IC chips, the Stati-Ex mat from Spirig Enterprises is intended for use with microcomputer installations consisting of a terminal, disc drives, and a printer. Made of electrically conductive rubber, the one-millimeter thick mat is also reported to be insensitive to heat; if you use it as a work surface, a hot ball of solder will not burn through. Dimensions are 100 cm x 50 cm. \$20. Address: S.A.T. South End Bridge Circle, Agawam, MA 01001.

Book three is free.

Buy any two books
in the Texas Instruments
Understanding Series™...
and get a third
book... **Free.**



NEW
Understanding
Electronic Control
of Energy Systems
\$6.95



NEW
Understanding
Automotive Electronics **\$6.95**

Important books. Important subjects. Learn quickly and easily how electronic technology is impacting today's automotive and energy control systems.

For a complete list of current book titles, send for a Learning Center Library catalog. It's free, too.

Send orders to:

Texas Instruments
P.O. Box 3640, M/S 84
Dallas, Texas 75285

All books \$6.95.
Check your choices below.



- | | |
|---|---|
| <input type="checkbox"/> Learning Center Library Catalog - CMI10K (Free) | <input type="checkbox"/> Understanding Microprocessors-LCB4023 |
| <input type="checkbox"/> Understanding Electronic Control of Energy Systems - LCB6642 | <input type="checkbox"/> Understanding Calculator Math-LCB3321 |
| <input type="checkbox"/> Understanding Automotive Electronics - LCB5771 | <input type="checkbox"/> Understanding Communications Systems-LCB4521 |
| <input type="checkbox"/> Understanding Solid-State Electronics-LCB3361 | <input type="checkbox"/> Understanding Computer Science-LCB4571 |
| <input type="checkbox"/> Understanding Digital Electronics-LCB3311 | <input type="checkbox"/> Understanding Optronics-LCB4572 |

Enclose check or money order with sales tax (except AK, DE, NH, OR). Foreign orders must be in U.S. dollars and include shipping charges. No phone orders, please.

Name _____

Address _____

City _____ State _____ Zip _____

NOTE: Offer expires 11/1/82

Prices subject to change
without notice
© 1982 Texas Instruments

TEXAS INSTRUMENTS
INCORPORATED

PE882
360116PE

ENTERTAINMENT ELECTRONICS

By Len Feldman

Stereo TV Is Coming Soon

IN Japan, TV viewers have been able to listen to many programs in stereo for nearly four years. When feature films made in other countries are shown on Japanese TV, the viewer has the option of listening to a dubbed, Japanese sound track or to the original. In Germany, with its wide-bandwidth (7 MHz per channel) PAL system, room was found for a second audio r-f carrier; and stereo TV was initiated in September of last year. Yet, in the United States, the only way you can enjoy over-the-air stereo TV is by combining a stereo FM receiver with your set when simulcasts of concerts are offered through the cooperative efforts of a TV channel and an FM station.

But all that is likely to change very soon. At a recently conducted Midwest Acoustics Conference held in Chicago, entitled "Audio Technology for Video," Mr. E.M. Tingley provided an update on the work of the Multichannel TV Sound Committee. It is this committee, operating under the aegis of the Electronic Industries Association (of which Mr. Tingley is a Staff Vice President of Engineering) that has been studying and testing three basic systems for the transmission of multi-channel TV audio for more than three years. Now, all of the data regarding the three proposed systems has been sifted down to a comprehensive report, and by late fall of this year, that report, along with a recommendation for a specific industry-endorsed system for stereo/bilingual TV standards, will be sub-

mitted to the Federal Communications Commission.

Whenever any new broadcast service is to be authorized, one of the chief concerns of the FCC is that it be compatible with existing service and with existing equipment. This is especially true in the case of multi-channel TV audio, since there is hardly a home in the U.S. that does not have at least one TV set. The majority of receivers are color sets, and represent an investment that should not have to be replaced when stereo or bilingual audio begins. The "mono" set must be able to receive a mono equivalent (left-plus-right) of the stereo program or, in the case of bilingual broadcasts, the primary language in which the program is transmitted.

Other matters of concern to the FCC are possible interference problems that may arise from the new transmissions as well as degradation in signal quality and possible excessive use of spectrum space. Broadcasters, on the other hand, are concerned with coverage and do not want to lose viewers if signal-to-noise performance is degraded by the new service. As Mr. Tingley explained, all of the three proposed systems do in fact cause a loss of audio signal-to-noise ratio (much as stereo FM offers poorer signal-to-noise performance at great distances from the station compared with mono FM).

However, since picture signal coverage has always been poorer than audio coverage in TV broadcasting, Mr. Tingley pointed out that as long as audio cover-

age does not decrease below that of video coverage, broadcasters will not object. To achieve this result, one of several proposed companding noise-reduction systems may be used as part of the broadcast standard.

Three Systems for TV Stereo. All three proposed stereo TV systems achieve mono compatibility because the sum of the left and right channel signals is used to frequency-modulate the main audio carrier, just as the mono signal modulates that carrier now. A difference signal (left-minus-right) is used to modulate a subcarrier the way a difference signal (L-R) is now used to modulate the double-sideband suppressed AM 38-kHz subcarrier in stereo FM broadcasting. The major differences among the three systems, however, are in the nature and frequency of this subcarrier.

A similarity between the three systems is in the addition of a second, frequency-modulated subcarrier located at a baseband frequency of 78.67 kHz—five times the horizontal TV line rate. This additional subcarrier is intended for other audio service in the future.

The EIAJ System. The Electronic Industries Association of Japan has proposed a multi-channel stereo TV system for use in the U.S. that is very similar, but not identical, to the one that has been in operation in Japan for several years. As illustrated in the baseband diagram of Fig. 1, this system employs an FM subcarrier with a frequency of 31.47 kHz, or twice the horizontal line frequency ($F_H = 15.734$ kHz).

As in all the proposed systems, the main audio carrier is modulated to a maximum of ± 25 kHz by a "sum" (L + R) signal. The stereo difference subchannel is frequency-modulated by the difference signal (L - R) with maximum deviation of the center frequency of the subchannel reaching ± 10 kHz. When stereo is broadcast, this first subchannel modulates the main r-f carrier by ± 20 kHz (this is indicated by the height of the block in Fig. 1). But if this first subcarrier is used for bilingual (second language) transmission, it deviates the main carrier by only ± 15 kHz.

Audio frequency response for both main and subchannels is flat from 50 Hz to 15 kHz, and the pre-emphasis used for main and subchannels is the same as that currently used (75 μ s). The control tone shown at $3.5F_H$ provides the data to automatically switch receivers from the stereo mode to the bilingual mode.

Odd-Multiple Subcarrier. Telesonics, a small Midwest company, was formed for the sole purpose of promoting its stereo/bilingual TV broadcast system. The baseband frequency distribution is illustrated in Fig. 2. In this system, a double-sideband suppressed AM subcarrier is used to modulate the main carrier with stereo difference or bilingual information. The system is very similar to the

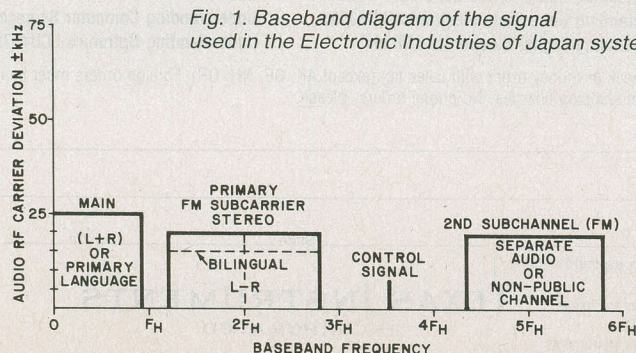


Fig. 1. Baseband diagram of the signal used in the Electronic Industries of Japan system.

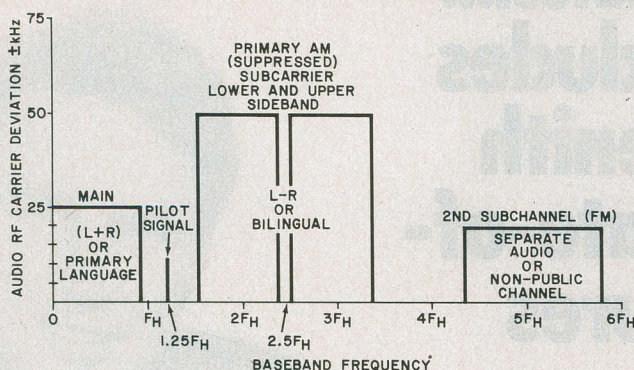


Fig. 2. Complete signal used in Telesonics TV audio system.

now-familiar stereo FM broadcast system used throughout the world.

What makes the system unique, however, is Telesonics' choice of a primary subcarrier frequency that has been set, not at a multiple of the horizontal TV line rate, but at 2.5 times that rate, or 39,939 kHz. The system requires a pilot signal that at one half the subcarrier frequency, happens to fall very near the 19 kHz pilot frequency used in stereo FM; specifically, at 19,668 kHz.

Because the use of an AM subcarrier inherently results in a poorer signal-to-

the 19-kHz stereo pilot used in FM, co-invented by Zenith), the TV horizontal line scan rate itself is used. The center frequency of the suppressed carrier is therefore set at exactly twice the horizontal line rate ($2F_H$). As shown in the diagram of Fig. 3, the additional FM subcarrier is again located at $5F_H$, as it is in the other two systems.

Signal-to-Noise Degradation. When Mr. Tingley presented his progress report concerning stereo/bilingual TV in Chicago, he was not prepared to disclose

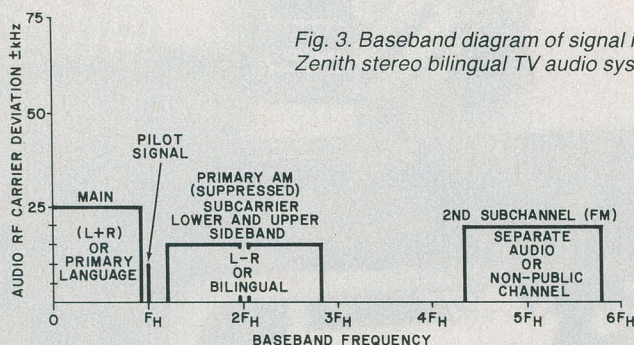


Fig. 3. Baseband diagram of signal in the Zenith stereo bilingual TV audio system.

noise ratio, Telesonics has elected to let the subcarrier modulate the main carrier by a full ± 50 kHz. The result is a mono-to-stereo signal-to-noise degradation that is only marginally worse than that encountered with the all-FM EIAJ system.

In addition, Telesonics claims certain advantages in its ability to reject specific noise impulses caused by interaction between the video and audio carriers. They also claim lower overall distortion than is possible with an FM subcarrier, because the latter, when operated with a limited bandwidth, tends to "lop off" sidebands needed to accurately transmit and reproduce complex audio waveforms.

Scan-Rate Synch. The Zenith Stereo TV system also uses an amplitude-modulated suppressed double-sideband subcarrier for transmission of the stereo difference or second-language audio signals. Instead of using a pilot carrier for receiver synchronization and reconstitution of the suppressed carrier, (such as

all the results of the laboratory and field tests. He did, however, tell us that the EIAJ system exhibited the least signal-to-noise degradation compared with mono TV audio; about 15 dB. Next came the Telesonics system, with a decrease in S/N of about 16 dB. The greatest degradation of signal-to-noise was experienced with the Zenith system, with a decrease in S/N ratio of around 20 dB.

Readers who are familiar with the 23 or so dB of signal-to-noise degradation experienced when switching from mono FM to stereo FM may be surprised by these figures, but when you consider the fact that TV audio (even in mono) starts out with a 10-dB disadvantage compared with FM audio, the figures don't look all that good. The 10-dB disadvantage arises because maximum deviation of the FM carrier in mono FM is ± 75 kHz, whereas the audio carrier in TV is only modulated to a maximum of ± 25 kHz, or one third as much.

Calculations made by the Multichannel TV Sound Committee showed that in

Grade B service areas (the end of the service area deemed to be "protected" by FCC regulations for TV), the best possible audio signal-to-noise ratio works out to be around 65 dB. Subtracting 15 dB from this (under the best conditions for the EIAJ system), brings the figure down to a barely acceptable signal-to-noise ratio of only 50 dB. For the other systems, S/N ratio is even poorer.

Companding Considered. For these reasons, the committee has been considering the possible use of companding or noise-reduction systems as part of a standard system for stereo or bilingual TV audio broadcasting. Interested parties were invited to submit their proposals. Those who responded included Dolby (which offered its newest consumer noise reduction system, Dolby C); dbx, Inc. (which offered a *modified* version of its well-known noise reduction/dynamic expansion system); and CBS, Inc. (which proposed the use of its CX system now being used as a disc companding system).

In addition to the basic tests and evaluations involving transmissions, the committee undertook a program of listening tests to evaluate the effectiveness of the three companding systems by simulating conditions that would prevail with AM and FM subcarriers in Grade A (close-in) and Grade B TV reception areas. One requirement insisted upon by the committee was that the companding systems offer both stereo and mono compatibility (to protect the investment of the owners of old mono sets as well as new, stereo TV sets not equipped with companding circuitry). This requirement apparently reduced the effectiveness of the proposed noise reduction systems so that there was no "clear winner."

The Committee is now considering altering the requirement to mono compatibility *only*. This would mean that all future sets built with stereo decoding would also have to include the noise-reduction circuitry that is eventually chosen as the industry standard. In this way, more effective companding circuits would be applied to the noisier stereo/bilingual subcarrier, but the main carrier containing the mono information would not be affected. These newer companding considerations are not, however, expected to delay the Committee's work.

If the present timetable is maintained, the FCC should be presented with an industry report and system recommendation in October or November 1982. Assuming that the FCC acts quickly, we could have an approved stereo TV broadcast system as early as mid-1983. Of course, if the FCC once again insists upon issuing another "marketplace" decision, (see "The AM Stereo Situation" in the July "Entertainment Electronics" column) we could also end up with *three* totally incompatible stereo TV systems. Furthermore, if the FCC leaves the choice of companding systems up to the "marketplace" we'll have *nine* possible system permutations. \diamond

Now! Learn on the latest... NRI training includes 25" Heath/Zenith color TV with state-of- the-art features

- 6-function infrared remote control
- space phone lets you answer or call from your chair
- microprocessor-controlled PLL varactor tuner
- 82 VHF/UHF, 35 cable channels
- 24-hour programmable channel selection
- electronic time display
- 4-speaker FM sound system
- choice of three cabinets at student discount



We've taken the finest, most advanced, most complete TV/Audio/Video course available and made it even better. Now NRI brings your training up to and even beyond today's technology with the exciting, advanced performance Heath/Zenith Model 2501 TV. Now you can learn how to service even the latest circuitry on the most expensive TV sets as you assemble and perform experiments on your Heathkit/Zenith. Only NRI combines such complete training with such up-to-date equipment.



Choice of specialty training on TV, stereo, or VCR

Choice of Three Specialties


And only NRI gives you the opportunity to specialize in any of three areas. You get the same complete training covering TV, audio systems, and video recorders, but you select your own specialty for practical, hands-on training.

You can choose to build the Heath/Zenith color TV; specialize in audio systems and build your own AM/FM stereo system; or take your bench training with remote-controlled videocassette recorder featuring NRI training on videotape. No matter

which specialty you elect, your practical training also includes experiments and demonstrations with the exclusive NRI Discovery Lab® and your own professional digital multimeter. All equipment is yours to use and keep.

Learn in Your Spare Time

No need to quit your job or tie up your evenings with night school...no classroom competition or rigid schedules. NRI trains you in your own home at your convenience. You're a class of one with complete course materials, practical training on the latest equipment, and the backing of a full staff of professional electronics educators. NRI brings it all to you.

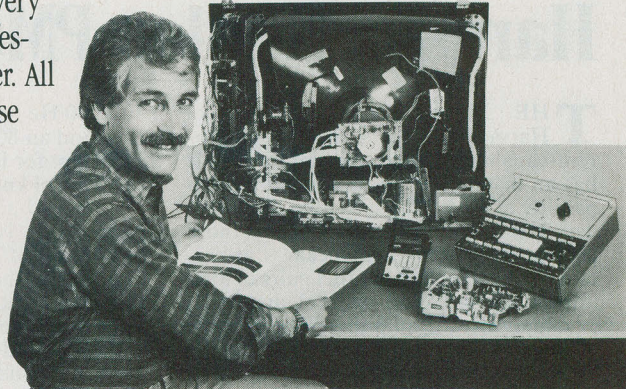

Practical training on a real state-of-the-art TV using professional equipment

The Professional's Choice

A million and a half students have already chosen the NRI way. And over half the practicing TV service technicians in the U.S. have advanced their careers with convenient home training. Among them, it's NRI 3 to 1 over any other school (summary of national survey on request).

Free Catalog... No Salesman Will Call

Get all the facts on complete, convenient NRI training. See all the equipment, look over complete lesson plans, check out our convenient time payment plans. And see the many other opportunities in fields like Microcomputers, Electronic Design, Communications Electronics, and more. Send postage-paid card and see what advanced training is all about. If card has been removed, please write to us.



NRI Schools

McGraw-Hill Continuing Education Center
3939 Wisconsin Ave.
Washington, D.C. 20016

We'll give you tomorrow.

Audio Product of the Month

CHOSEN BY THE EDITORS OF POPULAR ELECTRONICS



Harman-Kardon PM650 Integrated Amplifier

THE Model PM650 is one of Harman-Kardon's new high-current-capability integrated amplifiers. It has an instantaneous current output capability of 40 A, which enables it to drive very low load impedances (such as those presented by some loudspeakers at certain frequencies and parallel pairs of low-impedance speakers) without distortion or damage to the amplifier. The absence of the usual current-limiting circuits in the output stages also eliminates this as a potential source of distortion.

The H-K PM650 has a rated output of 50 W per channel into 8 ohms from 20 to 20,000 Hz with less than 0.03% total harmonic distortion. It has a complete array of control functions, including selectable terminating capacitance for the phono cartridge, yet presents a neat and uncluttered appearance.

The overall dimensions of the H-K PM650 are $17\frac{3}{8}$ " W \times 16" D \times $5\frac{1}{8}$ " H. It weighs 26 lb. Suggested retail price of the amplifier is \$369.95.

General Description. Harman-Kardon has been a proponent of wide-band circuitry for many years, and the Model 650 continues that tradition. Its low-level frequency response is specified as 4 to


140,000 Hz $\pm 0/-3$ dB, with a $2\text{-}\mu\text{s}$ rise time and an $80\text{-V}/\mu\text{s}$ slew rate.

Except for its large VOLUME knob, all the control knobs of the H-K PM650 are of identical size ($\frac{3}{4}$ "). Its other front-panel controls are "push on, push off" buttons of different sizes and shapes, according to their function—except that the three FUNCTION (input selector) buttons are mechanically interlocked. A narrow tinted-glass window across the top of the panel conceals identifier words that light to show the selected program source, and whether one or both of the two TAPE circuits has been selected, as well as an ON indicator next to the POWER switch button. The separation of the program and tape recorder selection functions makes it possible to listen to one program source while dubbing or making tapes from another.


The three input sources are AUX, TUNER, and PHONO. A small button gives an additional choice of MM (moving magnet) or MC (moving coil) cartridge inputs through separate sets of input jacks and preamplifier stages. The MM input also has a small front-panel knob that terminates a cartridge in a capacitance of either 100, 150, 200, or 300 pF, in addition to 47-kilohm input resistance.

Laboratory Measurements. Following a one-hour preconditioning period with both channels driving 8-ohm loads at 1000 Hz with one-third of rated power, and five minutes of full-power operation, the output of the Model PM650 clipped at 68 W per channel with both channels operating, giving a Clipping Headroom rating of 1.34 dB. As claimed by the manufacturer, the PM650 delivers progressively higher output power as the load impedance is reduced. Into 4 ohms, it developed 102 W per channel; and into 2 ohms its output was an impressive 141 W. This limit was set by the tripping of the amplifier's internal protective circuit breaker; and actual waveform clipping was not observed with 2-ohm operation.

When we drove the amplifier with the pulsed Dynamic Headroom test signal, the maximum power output was 79 W into 8 ohms, giving the amplifier a Dynamic Headroom rating of 2 dB. We also performed the Dynamic Headroom test at two lower load impedances, obtaining 139 W into 4 ohms and 208 W into 2 ohms. The 1000-Hz distortion of the PM650 was between 0.016% and 0.02% for all output powers up to 50 W, and only 0.05% at 65 W. When driving 4-ohm loads, the distortion varied from

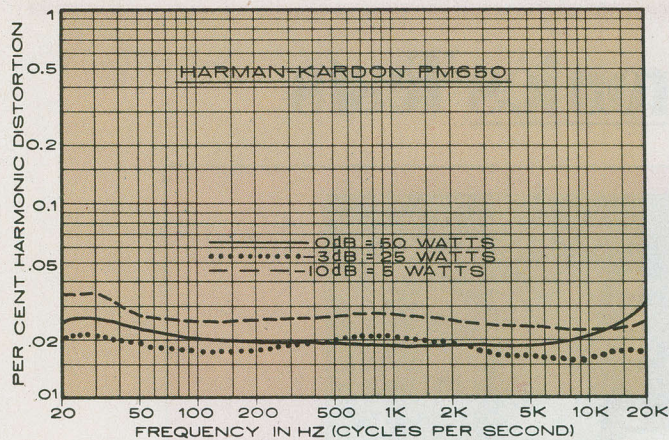

Distortion at 1000 Hz for power outputs between 1 and 100 W.

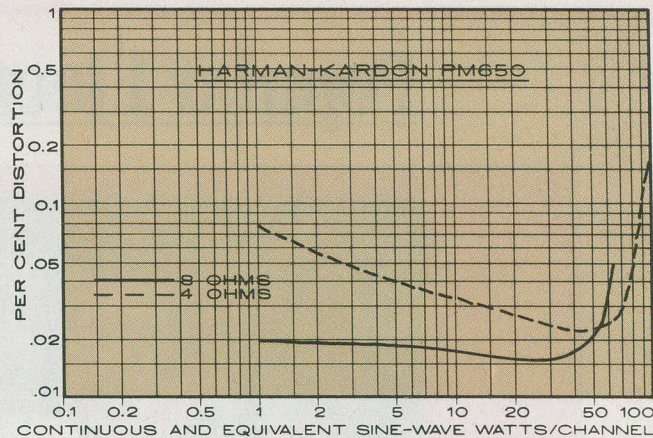

Percent harmonic distortion vs. frequency into 8 ohms.

0.023% to 0.2% for power outputs between 1 and 100 W. The distortion with a 2-ohm load could not be measured because the circuit breaker tended to trip quickly at fairly high power outputs. Across the full 20-to-20,000-Hz frequency range and at power levels from 5 to 50 W, the distortion was between 0.016% and 0.035%.

The amplifier's sensitivity for a reference output of 1 W was 18 mV (AUX) and 0.09 mV (PHONO MM), with an A-weighted S/N ratio for either input of 79.5 dB referred to 1 W. The amplifier was stable with reactive loads, and its slew factor exceeded our measurement limit of 25. The intermodulation (IM) distortion was measured with equal amplitude input signals of 19 and 20 kHz, having a combined peak amplitude equal to that of a 50-W sine-wave signal. This level served as the 0-dB reference. A spectrum analysis of the amplifier output (driving 8-ohm loads) showed a -82-dB second-order IM product at 1000 Hz, and a -83-dB third-order product at 18 kHz. The fifth-order intermodulation distortion at 17 kHz was measured as -88 dB.

The amplifier's tone controls had conventional characteristics—the bass control moves the low-end turnover frequency between 150 and 300 Hz, and the treble control positions high-end re-

sponse curves that are hinged at about 3 kHz. The loudness compensation boosted both low and high frequencies as the volume setting was reduced, but the amount of boost was moderate and did not cause any unpleasant alteration in sound quality. The SUBSONIC filter response was down 2.5 dB at 20 Hz, which was our lower measurement limit, and the HIGH CUT filter response was down 3 dB at 6 kHz. It appeared to roll off the output at 12 dB per octave above the audio range, but we could not determine the ultimate slope of the SUBSONIC filter response.

The amplifier's RIAA phono equalization was accurate within ± 0.5 dB from 20 to 20,000 Hz. It was affected only slightly by the inductance of a typical phono cartridge connected to the input (the total change was only about 1 dB from 1 to 20 kHz). The PHONO (MM) input impedance was 55 kilohms in parallel with capacitance values of 175, 225, 275, or 375 pF—depending on the setting of the front-panel switch. The MC input had a 400-ohm resistance. The MM input overloaded at a very good 240 mV at 1000 Hz and at slightly higher levels at 20 and 20,000 Hz.

User Comment. Not only did the H-K PM650 sound as sweet and clean as

would be expected from its fine measured performance, it also managed to sound like a much more powerful amplifier than its ratings would suggest. In fact, the more current we drew from the amplifier, the more impressive it became (especially when we paralleled several pairs of speakers to form a very low-impedance load). This is hardly a normal condition—many amplifiers rebel at this sort of treatment, yet the PM650 takes it in stride.

While we do not necessarily subscribe to the theory that sonic performance is improved when the amplifier bandwidth is far in excess of the audible frequency range, it seems unarguable that a high-current output capability, low distortion and noise level, and complete stability—regardless of load—result in an amplifier with a very fine sound.

We also appreciate the PM650's lack of switching transients or other disturbing sounds, and overall smooth operation. Even the delayed connection of the speakers that allows the amplifier circuits to stabilize is done in a graceful fade (instead of the usual abrupt "click"). In short, this is a fine product, well-suited for situations where one might ordinarily expect that far more powerful amplifiers are required.

—Julian Hirsch

CIRCLE NO. 101 ON FREE INFORMATION CARD

CONTROLS AND INDICATORS

FRONT PANEL:

Knobs:

- BASS and TREBLE: Tone controls.
- BALANCE: Control to center stereo image.
- MODE: Selects REVERSE, STEREO, and MONO modes.
- TAPE OUT: Controls the signal delivered to external tape decks. Positions marked SOURCE, TUNER, OFF, and COPY (twice). The two copy settings are for dubbing tape deck 2 to deck 1 and vice versa.
- VOLUME
- CAP. TRIM: Selects phono (MM) input capacitance of NORMAL, +50 pF, +100 pF, +200 pF.

Pushbuttons:

- POWER: Large rectangular button at left.
- SPEAKERS 1, SPEAKERS 2: Activates two pairs of speaker outputs independently of each other.
- TOPE DEFEAT: Bypasses tone control circuits.
- SUBSONIC: Inserts high-pass filter at app. 15 Hz.
- HIGH CUT: Inserts low-pass filter at app. 6 kHz.

LOUDNESS: Inserts Fletcher-Munson compensation into volume control circuit.

CARTRIDGE: Selects moving magnet (MM) or moving coil (MC) phono cartridge input.

TAPE MONITOR 1 and 2: Connects playback outputs of either external tape deck to the amplifier's circuits for playing tape or monitoring recordings. TAPE 1 has priority.

FUNCTION: Mechanically interlocked buttons for selecting program sources: AUX, TUNER, and PHONO.

Display: Illuminated words and numerals show selected program source and TAPE MONITOR settings, as well as power ON.

REAR PANEL:

- Jacks: Standard phono jacks for all signal inputs and outputs.
- Speaker System: Insulated binding posts for two pairs of speakers. Insert stripped ends of wires and clamp firmly.

Popular Electronics Tests



General Electric Model 19PC3708W 19" Color TV

THE General Electric Model 19PC3708W 19" color TV receiver features the company's new "PC" unitized printed-circuit board, replacing some of last year's EC chassis models. Its design promises easier servicing and higher reliability owing to a slide-out servicing provision and fewer connectors and components, as well as 27% less weight.

This is a direct or manual-tuning receiver with separate vhf and uhf mechanical tuners. A VIR (Vertical Interval Reference) pc board plugs into the main chassis's unitized board. The solid-state design makes use of five integrated circuits for sweep oscillator; audio; chroma-video; VIR; and i-f, agc, and detector sections—thereby reducing the set's parts count.

The front panel employs two concentric channel selectors, one for vhf and the other for uhf; an on-off volume control; on-off VIR switch; and thumbwheel controls for adjusting color, tint, brightness, and picture. A room-light sensor automatically adjusts color picture quality in accordance with room lighting conditions. At the rear of the chassis are controls for focus, vertical hold, sharpness, and horizontal hold adjustments.

The cabinet, which consists of simulated walnut on high-impact plastic, measures 17" H × 19" D × 24" W, and weighs 47 lb. Estimated future retail price for this color TV receiver is \$480.

General Description. Channel selection is accomplished by a separate rotary switch, with concentric, push-in, fine tuning for vhf and uhf channels, and a separate, illuminated indication next to each switch. The receiver's i-f section uses a SAW (Surface Acoustic Wave) filter and separate adjustments for the 41.25-MHz audio trap, and the 45.75-MHz trap for adjacent channel interference. A single IC performs the amplification, video and audio detection, noise filtering, automatic fine tuning (aft) and automatic gain control (agc) functions, and also includes a preamplifier for the video and the audio i-f (4.5 MHz).

The vertical and horizontal sync and the deflection sections use standard circuits. However, in an effort to reduce weight and in the interest of energy-efficiency, all dc voltages except one are obtained from the high-voltage flyback section. The ac power supply provides only one voltage, the well-regulated 116 V dc, to operate the horizontal oscillator and flyback driver. A separate current-sensing and regulator circuit controls the high voltage (HV), which, if excessive current is drawn, will automatically disable the 116 V dc regulator. Thus, service technicians should keep in mind that a HV defect can cause loss of the 116 V dc as well.

A single IC also performs all of the color sync, automatic color control (acc), color i-f amp, color killer, and demodu-


lating and matrixing functions. The three-color output amplifiers are mounted on a separate pc board at the base of the three-gun, in-line color picture tube, and receive the Y or brightness signal on their emitters. Direct-current coupling, together with diode dc-level control, provides excellent dc restoration.

The outstanding technical feature of the Model 19PC3708W, however, is the VIR II Broadcast Controlled Color System, introduced in 1980. The VIR board contains a special, 24-pin DIP IC (Matsushita AN5330) and six transistors. It connects to the main chassis, and to the VIR on-off switch and the VIR LED indicator.

The special VIR IC performs all of the VIR functions in a compact space. When a broadcast station uses a VIR signal (not all stations do), the receiver can lock in the same tint and chroma levels being transmitted. The line-recognizer section uses the composite sync signal, together with the horizontal blanking pulse, to find the vertical sync pulse and to count down to the 19th line. Outputs from the recognizer section are sensed by the VIR circuitry. When the VIR signal is detected, a LED indicator lights up.

A tint-controller section receives the R minus Y (R-Y) signal, which is then compared against the color signal obtained from the VIR reference. Manual tint-control voltage and the tint-preference control voltage (from the acc cir-

The Workbench

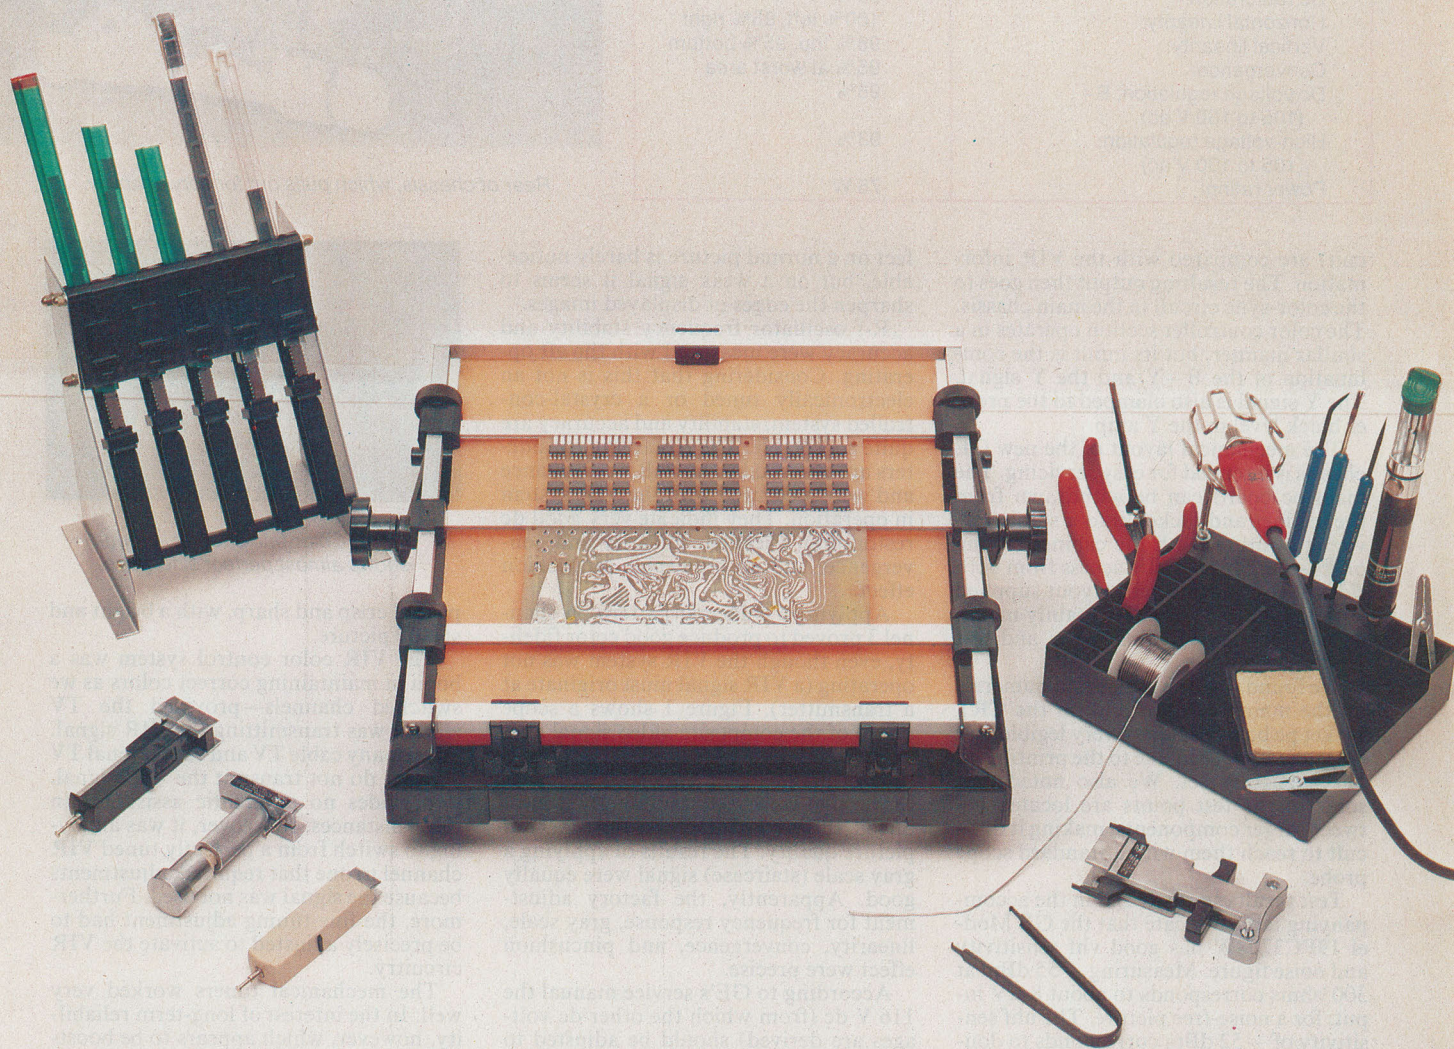

SOLDER AID


OK Machine & Tool Corporation
3455 Conner St., Bronx, N.Y. 10475 U.S.A.
Tel. (212) 994-6600 Telex 125091

CIRCLE NO. 36 ON FREE INFORMATION CARD

ok

GENERAL ELECTRIC MODEL 19PC3708W 19" COLOR TV RECEIVER LABORATORY DATA

Parameter	Measurement
Sensitivity, vhf (Ch. 3):	-55 dBm
Sensitivity, uhf (Ch. 20):	-52 dBm
Noise figure, vhf (Ch. 3):	8 dB
Noise figure, uhf (Ch. 20):	15 dB
Video bandwidth to CRT (-6 dB):	3.85 MHz
R-f oscillator frequency stability: (Ch. 3, 105 to 130 V ac, 2 hr)	0.085 MHz
R-f oscillator frequency error: (Ch. 3)	0.0615 MHz
Agc dynamic range:	65 dB
Dc restoration:	95%
Horizontal linearity:	100% left, 95% right
Vertical linearity:	98% top, 95% bottom
Convergence:	95% at worst area
Dc voltage regulation, B+: (105 to 130 V ac)	98%
High-voltage regulation: (105 to 130 V ac)	93%
Power rating:	75 W

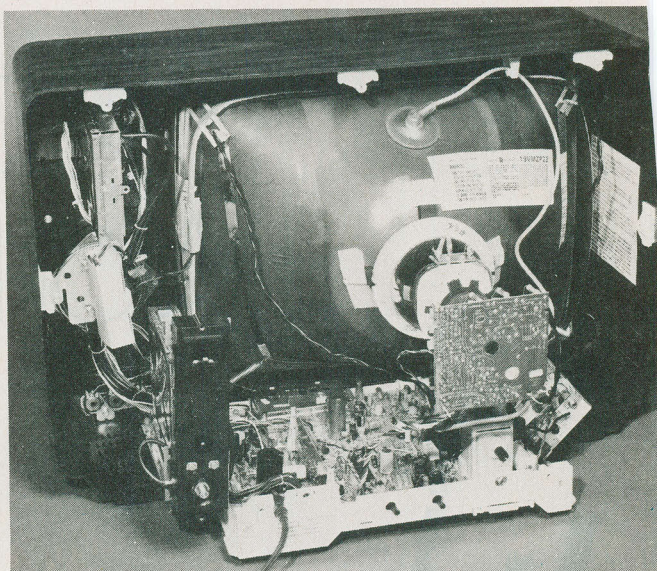

Rear of chassis, which pulls out for serviceability.

cuit) are compared with the VIR information. The resulting output then goes to the color-sync circuit in the main chassis. The color controller section operates in a similar manner, but its input is the combination of the B-Y and the Y signal. The Y signal is also clamped to the proper black level in the Y amp.

The mechanical layout of the new GE chassis is intended for easy servicing. The main pc board can be withdrawn from the cabinet and locked into a stable servicing position, with the cabinet resting on its side. This permits access from both sides. Also, the pc board layout supplied with the service manual certainly makes it easy to find individual parts and test points.

We found that the letters and numerals on the main pc board and on the CRT socket pc board were not very legible, but that may have been due to the printing on our particular set. We also noted that some of the test points are located between larger components, making it difficult to reach them with a standard scope probe.

Test results summarized in the accompanying table indicate that the GE Model 19PC3708W has good vhf sensitivity and noise figure. Measuring -55 dBm at 300 ohms corresponds to about 8 μ V input, for a noise-free picture. The uhf sensitivity of -52 dBm corresponds to double, or 16 μ V, which also promises good fringe-area performance. Unfortunately, the relatively higher noise figure for the uhf tuner limits the effectiveness of the VIR system to relatively noise-free signals.

The video bandwidth of 3.85 MHz was measured with the sharpness control set at its midpoint. We also observed that this control reduced the video response curve to 3.80 MHz at its soft setting and caused a +3-dB peak at 3.75 MHz at the sharp setting. Since the sharpness control is located at the rear of the set, the owner does not ordinarily worry about it. Its ef-

fect on a normal picture is barely noticeable, but on a weak signal it seems to sharpen the edges of displayed images.

R-f oscillator frequency stability and accuracy were measured with the aft operating. Considering that this is not an electronically tuned or a crystal-controlled system, stability and accuracy are quite acceptable. The remaining parameters are affected by the VIR performance and were measured with the VIR system in operation. They indicate very good dc restoration, excellent linearity and convergence, and no noticeable pincushion effect.

Applying a color-bar pattern on channel 3 proved to produce good color fidelity, even though the VIR system was not operating (a VIR signal must originate at a transmitter). Figure 1 shows a scope photo of the composite video signal as it entered the color i-f section. At an amplitude of about 0.5 V and with the 3.58-MHz sine-wave burst perfectly reproduced, this photo quantifies the observed picture quality. The results of applying a gray scale (staircase) signal were equally good. Apparently, the factory adjustment for frequency response, gray scale, linearity, convergence, and pincushion effect were precise.

According to GE's service manual the 116 V dc (from which the other dc voltages are derived) should be adjusted to within 0.5 V, but the regulation of that voltage only covered 98%. Assuming the 2% difference to be equally distributed, this means that the 116 V dc could change by ± 1.16 V. However, we noticed no degradation of performance, even with changes in line voltage from 105 to 130 V ac. The stated range of regulation for the high voltage is from 26 to 28.5 kV, which is about 10%, and the measured values were better than that.

User Comments. Performance of this 19" color TV receiver was especially fine in terms of picture quality. Colors ap-

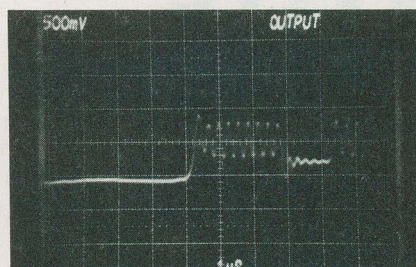


Fig. 1. Color-bar video at i-f input shows almost perfect sine wave.

peared crisp and sharp, with a bright and steady picture.

The VIR color control system was a boon in maintaining correct colors as we switched channels—provided the TV station was transmitting the VIR signal. Since many cable TV and educational TV stations do not transmit the VIR signal, it provides no automatic assistance in these instances. Moreover, it was annoying to switch from a perfectly tuned VIR channel to one that required adjustments because the signal was not used. Furthermore, the fine-tuning adjustment had to be precisely adjusted to activate the VIR circuitry.

The mechanical tuners worked very well. In the interest of long-term reliability, however, which appears to be boosted in this set with the new main pc board, we prefer electronic tuning. In addition, mid-band and super-band cable stations are not available with them. (One can view these stations when subscribing to a cable service, however, with a supplied cable channel selector.) Using mechanical tuners contributes to a lower price, though.

In summary, we liked the overall performance of the Model 19PC3708W, and particularly appreciate the easy serviceability of the receiver as compared to earlier GE models. —Walter Buchsbaum

CIRCLE NO. 103 ON FREE INFORMATION CARD

Build your own computer for \$79.95



The Sinclair ZX81 personal computer kit

Imagine building your own computer for only \$79.95!

That's exactly what you can do with the ZX81 kit. It comes with all the parts you need and complete diagrams and instructions for putting it together. All you have to supply is soldering iron, solder, and a screwdriver. Plus, of course, a little bit of work.

But you get a lot more than several hours of kit-building fun. You also get a surprisingly powerful personal computer. The ZX81 hooks up to any TV for a 32-character by 24-line display (we provide the connecting cables). You can also use a standard cassette recorder to store your programs (again, we provide the cables).

Most important, you get a BASIC programming language that's powerful enough to challenge and interest the most experienced programmers. The ZX81 can handle multidimensional string and numerical arrays. It has full mathematical functions accurate to eight decimal places. Single-key entry for every command. Syntax error detection, debugging codes, and easy editing. Plus features that are ideal for creating games, such as 20 graphic symbols, continuous

display, and random number generator.

The ZX81 can be expanded too. You can increase the memory from 1K to 16K with our Memory Module for \$49.95. And you get a comprehensive manual that completely documents the capabilities of the ZX81, and teaches programming from the ground up.

In short, you get all the features that have made the Sinclair ZX81 the fastest selling personal computer in the world. And you get the satisfaction and fun of building it yourself.

A few years ago, this kind of computer power was simply unavailable to the individual. Even today, most personal computers are too expensive to buy for personal use.

But the ZX81 kit can be yours for only \$79.95. Take advantage of this unique offer today. To order, send the coupon along with a check or money order. Or for faster delivery, call our toll-free number and use your MasterCard or VISA.

To order call toll free: 800-543-3000.

Ask for operator #509. In Ohio call: 800-582-1364; in Canada call: 513-729-4300. Ask for operator #509. Phones open 24 hours a day, 7 days a week. Have your

MasterCard or VISA ready.

These numbers are for orders only. If you just want information, please write: Sinclair Research Ltd., 2 Sinclair Plaza, Nashua, NH 03061.

AD CODE 08PEOK		MAIL TO: Sinclair Research Ltd., One Sinclair Plaza, Nashua, NH 03061.	
	PRICE*	QTY.	AMOUNT
ZX81 Kit	\$79.95		
16K Memory Module	\$49.95		
Shipping and Handling	\$4.95		\$4.95
*U.S. dollars		TOTAL	
Name _____			
Address _____			
City _____	State _____	Zip _____	

Sinclair technology is also available in Timex/Sinclair computers under a license from Sinclair Research Ltd.

sinclair

If you have put off learning more electronics for any of these reasons, act now!

- ☐ I don't have the time.
- ☐ High school was hard for me and electronics sounds like it may be hard to learn.
- ☐ I can't afford any more education.
- ☐ I have a family now.
- ☐ I'm here. You're there. I've never learned that way before. I'm not sure it will work for me.

Read the opposite page and see how you can get started today!

Be honest with yourself. Are the reasons really excuses? You already know enough about electronics to be interested in reading this magazine. So why not learn more? If you need encouragement, read on and see how excuses can be turned into results.

You don't have the time. Be realistic. All you have in life is a period of time. Use it. Try to know more tomorrow than you do today. That's the proven way to success. CIE studies require just about 12 hours of your time a week, two hours a day. You probably do have the time.

Electronics sounds like it may be hard to learn. You already know something about electronics or you wouldn't be reading this. Now, build on that. CIE Auto-Programmed® Lessons help you learn. Topics are presented in simple, logical sequence. All text is clear and concise for quick, easy understanding. You learn step by step, at your own pace. No classes to attend. Nobody pressures you. You can learn.

You can't afford any more education. Actually, you can't afford NOT to gain the skills that can put you ahead of the others. You know what inflation is doing to you now. Education—learning a skill—is an inflation-fighter that can be yours. If you are not able to pay full tuition now, CIE will lend you funds on a monthly payment plan.


You have a family now. All the more reason why you have the responsibility to advance yourself. For the sake of your family. Do you want them to have what you had or have more than you had? The choice is yours. Electronics is a rewarding career choice. CIE can help you to get started on that career.

You're there. We're here. How does CIE help you learn? First, we want you to succeed. You may study at home, but you are not alone. When you have a question about a lesson, a postage stamp gets you your answer fast. You may find this even better than having a classroom teacher. CIE understands people need to learn at their own pace. When CIE receives your completed lesson before noon any day of the week, it will be graded and mailed back the same day with appropriate instructional help. Your satisfaction with your progress comes by return mail. That's how CIE helps you learn.

NOW, IF YOU AGREE CIE TRAINING CAN WORK FOR YOU, HOW ELSE CAN CIE HELP YOU?

Cleveland Institute of Electronics is the largest independent home study school in the world that specializes exclusively in electronics. Although "big" does not always mean "best," it is evidence that CIE is a strong, successful institution with the people and resources to help you succeed.

AUGUST 1982

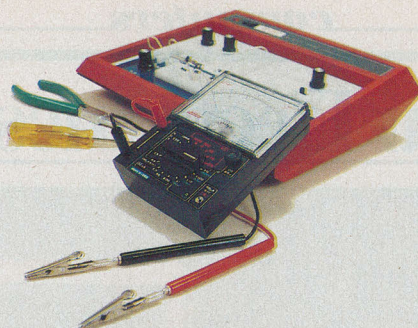

Step-by-step learning includes "hands-on" training.

The kind of professional you want to be needs more than theory. That's why some of our courses include the Personal Training Laboratory, which helps you put lesson theory into actual practice. Other courses train you to use tools of the trade such as a 5MHz triggered-sweep, solid-state oscilloscope you build yourself—and use to practice troubleshooting. Or a Digital Learning Laboratory to let you apply the digital theory that's essential today for anyone who wants to keep pace with electronics in the eighties.



Your FCC License can impress employers.

For some electronics jobs, you must have your FCC License. For others, employers usually consider it a mark in your favor. Either way, your License is government-certified proof of your knowledge and skills. More than half of CIE's courses prepare you to pass this exam. Surveys show that some 80% of CIE graduates who take the exam are successful.

Find out more! Today. Now.

There's a card with this ad. Fill it in and return. If some other ambitious person has already removed it, use the coupon.

You'll get a copy of CIE's free school catalog, along with a complete package of personal home study information.

For your convenience, we'll try to arrange for a CIE representative to contact you to answer any questions you may have.

If you are serious about a rewarding career, about learning electronics or building on your present skills, your best bet is to go with the electronics specialists—CIE. Mail the card or coupon today or write CIE (please mention the name and date of this magazine), 1776 East 17th Street, Cleveland, Ohio 44114.

This could be the best decision you've made all year.

Associate Degree

Now, CIE offers an Associate in Applied Science Degree in Electronics Engineering Technology. In fact, all or most of every CIE Career Course is directly creditable towards the Associate Degree.

"If you're going to learn electronics, you might as well learn it right!"

John Cunningham
Senior Technical Director



PE68

CIE Cleveland Institute of Electronics, Inc.

1776 East 17th Street, Cleveland, Ohio 44114
Accredited Member National Home Study Council

☐ **YES...** I want to learn from the specialists in electronics — CIE. Send me my FREE CIE school catalog...including details about the Associate Degree program...plus my FREE package of home study information.

Print Name _____

Address _____ Apt. _____

City _____


State _____ Zip _____

Age _____ Phone (area code) _____

Check box for G.I. Bill bulletin on Educational Benefits: ☐ Veteran ☐ Active Duty

MAIL TODAY!

Popular Electronics Tests

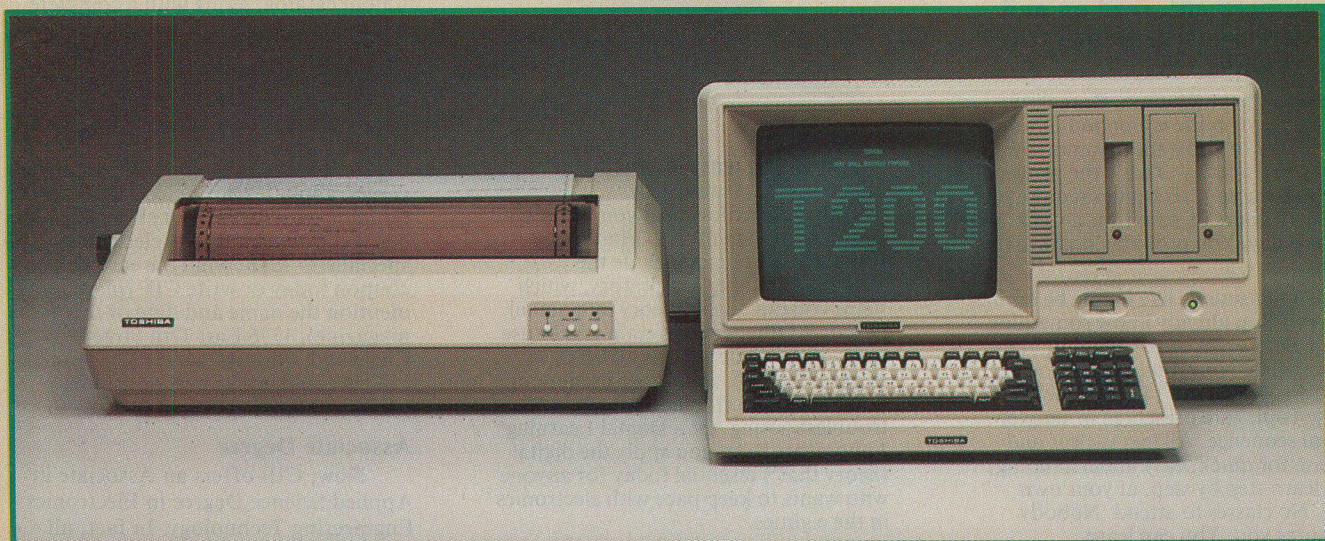

Toshiba T200-4 Computer System

TOSHIBA'S new T200/T250 Computer System is an integrated desktop business computer that includes a dot-matrix printer and a software package. Software accompanying the system consists of word processing, CP/M, Microsoft BASIC-80, and CBASIC 2. More business-application software is available as an option.

The only difference between the T200 computer and the T250 computer is the data-storage capacity. Whereas the T250 has drives with a storage capacity of 1M bytes/drive, the T200 is equipped with 5 $\frac{1}{4}$ " double-sided, double-density drives with a capacity of 180K bytes/drive. There are single- and dual-drive models available for both the T250 and the T200.

This test review covers the T200-4 computer, which has two 5 $\frac{1}{4}$ " drives. Suggested retail price for this system is \$5750, including the software package and the printer.

The T200-4 computer is mounted in a desktop cabinet made of reinforced fiberglass and metal. It has two vertically mounted disk drives and a 12-in. CRT. A detached keyboard is connected to the housing by cable.

The typewriter-style keyboard has 85 keys, including 10 programmable function keys and a numeric keypad. The keys are mounted at a 15-degree typing angle, for greater visibility, and the typing keys are white, while control keys are

black. The keyboard is controlled by an 8279 keyboard controller chip and the keyswitches have N-key rollover.

Implementation. The T200-4 is implemented as a single-board computer with the disk controller and the I/O circuits on separate boards. The microprocessor is a Toshiba 8085 operating at 5 MHz. The RAM memory consists of 64K bytes of dynamic RAM controlled by an 8257 programmable DMA (Direct Memory Access) controller IC.

The disk controller subassembly circuit board is mounted over the main system board. It uses an NEC 765 controller chip and phase-locked-loop circuits to control up to four disk drives. The drives themselves are quiet and reliable.

The 12-in., green-phosphor CRT has a wide bandwidth (22 MHz) and displays an 80-character, 25-line format in a high-resolution 8-by-8-character matrix. The CRT is not used at its rated capability—an example of Toshiba's conservative design philosophy.

The I/O circuit board is located at the rear of the machine and is connected to the main board by a shielded cable. The T200-4 comes with a parallel input port for the keyboard, an 8-bit parallel port configured for a Centronics printer, and an RS-232C serial port.

The T200-4 is completely shielded. All RFI and EMI sources are covered with a ventilated aluminum cover. This shield-

ing and the weight of the power supply make the T200-4 computer a very solid unit. The table-top computer weighs 66 lb, and the associated keyboard unit weighs 4.4 lb. The computer unit measures 21 $\frac{3}{4}$ " W \times 13" H \times 17" D. The keyboard unit is 17 $\frac{3}{4}$ " W \times 3 $\frac{1}{8}$ " H \times 8 $\frac{1}{2}$ " D.

Power requirements for the computer are 115-V ac, at 60 Hz. Without the printer, the computer uses under 2.2 A.

The dot-matrix printer supplied with the system has a full 15-in. carriage, permitting a full-sized 132-column printout. It prints 125 characters per second bidirectionally. The character set is derived from a 9-by-7 dot matrix with a spacing of 10 characters per inch, and a line spacing of 6 lines per inch. The print mechanism is a full-stroke unit, which means that the print head is mounted on a helical cam that causes the head to move the full 132 columns on each pass. However, the operation is fairly quiet for a dot-matrix printer. A pin-feed roller handles paper flow, and a plastic window is provided to observe printing. All the controls are on the front panel. The printer weighs 31.0 lb and measures 22" W \times 7 $\frac{1}{2}$ " H \times 14 $\frac{1}{2}$ " D. It operates on 115-V, 60-Hz ac power and uses less than 1 A of current.

This printer is designed for data processing, and is not intended for word-processing applications. However, a high-density dot-matrix printer (such as

a C. Itoh Model 8510) can be connected in place of the system printer to provide better print quality.

Software. The system software consists of Digital Research's CP/M operating system. However, the software is not of the same quality as the hardware. The implementation of CP/M is still undergoing change. (The CP/M version 1.2 we tested does offer improvements in terms of handling the CRT.)

We particularly liked the T200-4's booting. The screen tells you to insert the diskette, then the rest of the booting process is automatic.

Making backup diskettes or data diskettes is equally simple. First, enter **FORMAT**. This will cause the Toshiba format program to load and tell you that the

three minutes—with verification.

As good as the surface functions are, Toshiba's implementation of CP/M still leaves something to be desired. For example, all the ports except the RS-232C port are initialized on power-up. A separate diskette is needed to use the serial port, and yet another diskette is required to set baud rates, parity, and direction. Unfortunately the serial drivers aren't implemented in the Basic Input Output System (BIOS) of CP/M, nor is there room to do so. But Toshiba claims that an updated version of CP/M that handles all the I/O correctly is being readied.

Toshiba offers a full range of applications packages for the T200-4, including business, word processing, and communications. For this review, we used Wordstar 3.0, Microplan (an electronic

package manuals. Very little information is provided about the machine operation, and virtually no in-depth technical detail is currently available.

Toshiba has employed the services of a California-based documentation company, called The Writery, to improve the T200-4's documentation.

Evaluation. The T200-4 is a data-processing tool that is as functional as any of the other high-end microcomputer systems currently available. And it's a breeze to set up. All we did was remove it from the box, plug in the printer system, and attach the keyboard.

Each of the interface cables is tied in directly to the machine and requires no plug-in. Electrical cables are designed to be plugged into the back of the system. The I/O cables are multi-wire, heavily shielded types. Unfortunately, the keyboard cable is extremely stiff and a little too short, so moving the detached keyboard around to a comfortable position can be difficult.


The keyboard uses a design similar to Wang, in that the essential function keys are located on the top row, including the **CONTROL** key. After a couple hours of use, this layout proved more of an asset than a detriment. We also liked the keyboard's ability to re-boot the system—simply depress the **CONTROL** key and **IPL** key. The **PRINT** key allows you to automatically send output to the printer with a single keystroke. Want to lock the keyboard? Just depress the **KEY-LOCK** key.

Below the first disk drive is a CRT intensity control so the operator can easily set the screen intensity to fit the room lighting. The CRT also employs an etched screen to reduce glare and eye-strain—a real help in an office environment.

During our testing for RFI/EMI, we were unable to detect any measurable radiation, even with the machine's cover removed. Apparently, good internal shielding, several wide ground paths, and shielded and grounded cables have eliminated potential RFI/EMI difficulties.

Our basic speed test of 10 **GOSUB** 10, using **BASIC-80**, yielded an average time-to-error of 0.29 seconds—revealing an excellent handling of memory processing. Using a 14,000-character Wordstar file, we found that average screen updates took only 14 seconds, from top-of-file to end-of-file. In addition, to load 24K bytes of **BASIC-80** required only 5 seconds, and loading Wordstar took just 5.2 seconds, with the first overlay coming after a scant 1.2 seconds. Printing the file took approximately 3 minutes—slightly longer using Wordstar's spooler.

Using our disk test, which is a **BASIC** program that writes an entire disk with the letter "A" and then retrieves it, took an average of 27 seconds. Using Digital Research's **PL/I Chess** program to develop a maximum processing speed, we found that it took an average of 1.83 seconds to compile and load the program; this is benchmarked against an Altos 4-

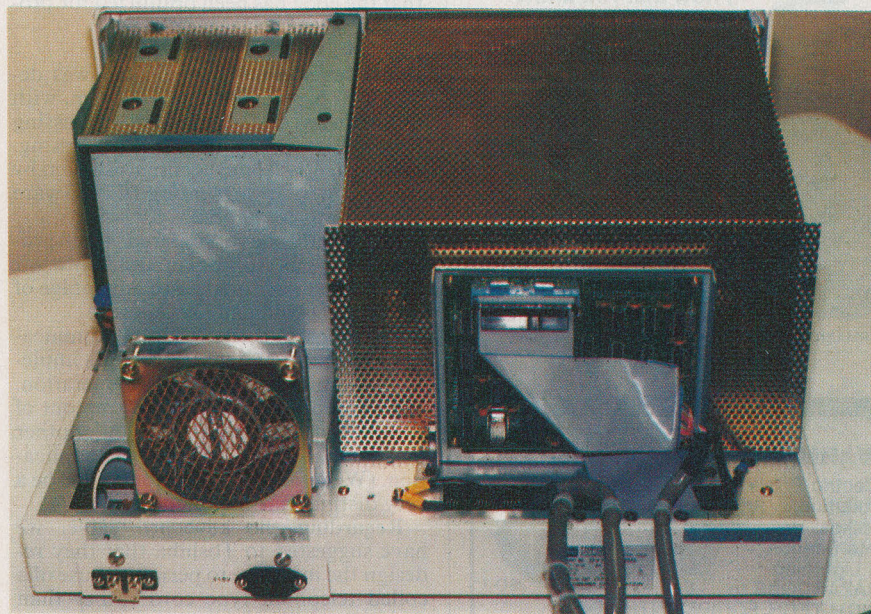

Using a well-shielded modular design, the T200-4 permits ease of maintenance and is virtually RFI and EMI free.

source is on the A drive and the destination on the B drive. Then the program asks you if you're ready. Formatting with verification of tracks is quick (less than a minute for the full operation), and errors are detected, giving track and sector.

A system diskette is made using the system-generating program called **TOSGEN**. Unlike other CP/M-based systems, there is no need to run the **MOVCPM** program to generate a memory image of the system size. In fact, this utility doesn't exist on the supplied system diskette, nor is it really needed. When used, **TOSGEN** lets you choose (a) just the system tracks, (b) the entire diskette to be copied, or (c) to quit the operation.

Like formatting a diskette, creating a new system diskette is quick. (It takes under a minute for the system tracks and about two minutes for the entire diskette to be copied.) As a test, we copied the entire diskette, using the Peripheral Interchange Program (**PIP**). This took just

spread sheet), and **Whiz** (a communications package). Wordstar is priced at \$495, Microplan runs \$495, and **WHIZ** can be had for \$150.

All of the applications software packages are preinstalled and ready to run on the computer. However, this fact is not mentioned in Toshiba's documentation. This may cause the user to try and install the packages according to instructions in the software manuals. If this is done, the user will find that there is no mention of the Toshiba computers in the menus displayed by the **INSTALL** programs. Toshiba says that they are aware of the problem, and efforts are underway to correct the documentation.

Even though the basic T200-4 is an excellent machine, and Toshiba is making efforts to improve the software interface, documentation is not particularly good. The documents provided include a reprint of Digital Research's CP/M manuals and reprints of all the application



©1982 TDK Electronics Corp.

CIRCLE NO. 43 ON FREE INFORMATION CARD

MUSIC LIVES ON TDK

Music sets the tone in your life. Creates a world of enjoyment all your own. If you want nothing to interfere, choose TDK.

TDK cassettes make music live. With a performance as full and vibrant as the original. In its special way TDK does more than record. It recreates. Music is magic. Don't lose any of it, now that you know where it lives.



computers

MHz Z80 hard-disk system of 3 minutes. All in all, the T200-4 is a very fast machine.

To test the application capability of the T200-4 we used Chang Laboratories' Microplan Electronic Worksheet. This package requires the use of CRUN2 as a host run-time package, and employs full screen attributes of the T200-4, including inverse video.

Although we are normally biased against application packages that require host languages, Microplan proved the exception for several reasons. First, it provided easily understood screen help messages and always displays its menu to the right of the worksheet. Second, the documentation is good and can be understood by a first-time computer user. Also, the system is quick. This speed is partly a function of the hardware, but it shows that the code has been optimized for processing speed.

User Comments. The T200-4 was designed as a general-purpose system, with the primary use being word processing and the secondary use data processing. Consequently, some license was taken by the designers in presenting the software applications packages.

We would have preferred that programs such as Microplan and Wordstar be implemented to take full advantage of the extremely flexible keyboard.

In the case of the Whiz communications package, we would prefer its implementation as a background operation. This would allow the user to trap out of an application, capture data on another machine, and then re-enter the application. (We understand this approach to be a very distinct future possibility.)

Regarding the keyboard cable, we have suggested to Toshiba that they redesign the interface to permit the use of a coiled telephone-type cord rather than the stiff cable now being used. But regardless of the problems, we generally liked the T200-4. It proved very reliable—even when operated in our 100°F hot box, and under heavy smoke conditions.

Even though the T200-4 is being marketed as a data-processing system, we think Toshiba should drop the current printer and offer either the C. Itoh 8510 as the replacement or the Epson MX-100. (The Epson MX-100 is needed if a full carriage is required). The current printer isn't flexible enough.

In addition, we think that a full technical manual should be made available, as well as a quick-reference card for basic system use.

An important attribute, we found in our discovery sessions, was that the Toshiba system is designed for upward growth. Its architecture suggests the capability of adding a 16-bit co-processor and perhaps networking capability. Should business data processing be what you're buying the system for, the T200-4 could fit nicely into your plans.

CIRCLE NO. 102 ON FREE INFORMATION CARD

Commodore VIC-20 Computer

\$209

sale price

(When you buy 6 tape programs)

You get this full sized extra featured computer with color, sound, music, 66 key expanded typewriter keyboard and extended level 11 basic for only \$209 (list price \$299) when you buy 6 tape programs! We stock more programs and accessories than anyone! IMMEDIATE REPLACEMENT WARRANTY! 2 to 7 days delivery! Order Now!

15 DAY FREE TRIAL

Protecto Enterprises
Box 550 • Barrington, IL 60010
Phone Orders (312) 382-5244
Write for Free Catalog

CIRCLE NO. 40 ON FREE INFORMATION CARD

WARNING!

Electric Power Pollution, Spikes, Interference & Lightning HAZARDOUS to HIGH TECH EQUIPMENT!!

PAT. # 4,259,705



MicroComputers, VTR, Hi-Fi, Lasers, Spectrometers are often damaged or disrupted due to Power Pollution.

High Tech components may interact!

Our patented ISOLATORS eliminate equipment interaction, curb damaging Power Line Spikes, Tame Lightning bursts & clean up interference.

Isolated 3-prong sockets; integral Spike/Lightning Suppressor. 125 V, 15 A, 1875 W Total, 1 KW per socket.

ISO-1 ISOLATOR. 3 Isolated Sockets; Quality Spike Suppression; Basic Protection \$69.95

ISO-3 SUPER-ISOLATOR. 3 DUAL Isolated Sockets; Suppressor; Commercial Protection \$104.95

ISO-17MAGNUM ISOLATOR. 4 QUAD Isolated Skts; Suppressor; Laboratory Grade Protection \$181.95

Master-Charge, Visa, American Express

TOLL FREE ORDER DESK 1-800-225-4876 (except AK, HI, MA, PR & Canada)

SATISFACTION GUARANTEED!

Electronic Specialists, Inc.

171 South Main Street, Natick, MA 01760

Technical & Non-800: 1-617-655-1532

CIRCLE NO. 15 ON FREE INFORMATION CARD

POPULAR ELECTRONICS

ANNOUNCING TWO NEW TERMINALS

Smart • Fast • Graphics • Matching Modem and \$295 Printer

Netronics announces a state of the art breakthrough in terminals, now at prices you can afford, you can go on-line with data-bank and computer phone-line services. It's all yours: "electronic newspapers," educational services, Dow-Jones stock reports, games, recipes, personal computing with any level language, program exchanges, electronic bulletin boards... and more every day!!!

Netronics offers two new terminals, both feature a full 56 key/128 character typewriter-style keyboard, baud rates to 19.2 kilobaud, a rugged steel cabinet and power supply. The simplest one, FASTERM-64, is a 16 line by 84 or 32 character per line unit, with a serial printer port for making hard copy of all incoming data, and optional provisions for block and special character graphics. The "smart" version, SMARTERM-80, features either 24 line by 80 characters per line or 16 by 40 characters per line, it offers on-screen editing with page-at-a-time printing, 12,000 pixel graphics, line graphics, absolute cursor addressing, underlining, reverse video, one-half intensity and much more... simply plug them into your computer or our phone modem and be on-line instantly. Use your TV set (RF modulator required) or our deluxe green-phosphor monitor pictured above. For hard copy just add our matched printer.

Price breakthrough!!! Own the FASTERM-64, a complete terminal kit, ready to plug in for just \$199.95 or order the SMARTERM-80 kit for just \$299.95, (both available wired and tested.) Be on-line with the million-dollar computers and data services today... we even supply the necessary subscription forms.

More good news: All the components in our terminals are available separately (see coupon), so you buy only what you need!!!



FASTERM-64... DISPLAY FORMAT: 64 or 32 characters/line by 16 lines... 96 displayable ASCII characters (upper & lower case)... 8 baud rates: 150, 300, 600, 1200, 2400, 4800, 9600, 19,200, (switch set)... LINE OUTPUT: RS232C or 20 ma current loop... VIDEO OUTPUT: 1V P/P (EIA RS-170)... CURSOR MODES: home & clear screen, erase to end of line, erase cursor line, cursor up & down, auto carriage return/line feed at end of line & auto scrolling... REVERSE VIDEO... BLINKING CURSOR... PARITY: off, even or odd... STOP BITS: 1, 1.5, 2... DATA BITS PER CHARACTER: 5, 6, 7 or 8... CHARACTER OUTPUT: 5 by 7 dot matrix in a 7 by 12 cell... PRINTER OUTPUT: prints all incoming data... 1K ON BOARD RAM... 2K ON BOARD ROM... CRYSTAL CONTROLLED... COMPLETE WITH POWER SUPPLY... OPTIONAL GRAPHICS MODE: includes 34 Greek & math characters plus 30 special graphics characters... ASCII ENCODED KEYBOARD: 56 key/128 characters.

SMARTERM-80... DISPLAY FORMAT: 80 characters by 24 lines or 40 characters by 16 lines 128 displayable ASCII characters (upper & lower case) 8 baud rates: 110, 300, 600, 1200, 2400, 4800, 9600, 19,200... LINE OUTPUT: RS232C or 20 ma current loop... VIDEO OUTPUT: 1V P/P (EIA RS-170)... EDITING FEATURES: insert/delete line, insert/delete character, forward/back tab... LINE OR PAGE TRANSMIT... PAGE PRINT FUNCTION... CURSOR POSITIONING: up, down, right, left, plus absolute cursor positioning with read back... VISUAL ATTRIBUTES: underline, blink, reverse video, half intensity, & blank... GRAPHICS: 12,000 pixel resolution block plus line graphics... ON-SCREEN PARITY INDICATOR... PARITY: off, even or odd... STOP BITS: 110 baud 2, all others 1... CHAR. OUTPUT: 7 by 11 character in a 9 by 12 block... PRINTER OUTPUT: 60 or 50 Hz VERTICAL REFRESH... BLINKING BLOCK CURSOR... CRYSTAL CONTROLLED... 2K ON BOARD RAM... ASCII ENCODED KEYBOARD: 56 key/128 character... 4K ON BOARD ROM... COMPLETE WITH POWER SUPPLY.

TELEPHONE MODEM 103 O/A... FULL DUPLEX, FCC APPROVED... DATA RATE: 300 baud INTERFACE: RS232C and TTY... CONTROLS: talk/data switch (no need to connect and disconnect phone), originate/answer switch on rear panel... NO POWER SUPPLY REQUIRED.

ASCII KEYBOARD ASCII-3... 56 KEY/128 CHARACTER ASCII ENCODED... UPPER & LOWER CASE... FULLY DEBOUNCED... 2 KEY ROLLOVER... POS OR NEG LOGIC WITH POS STROBE... REQUIRES +5 & +12V DC (SUPPLIED FROM VIDEO BOARDS).

PRINTER COMET I... SERIAL I/O TO 9600 BAUD... 80 CHARACTER COLUMN (132 COMPRESSED)... 10" TRACTOR FEED... UPPER/LOWER CASE... INDUSTRY STANDARD RIBBONS... 4 CHARACTER SIZES... 9 BY 7 DOT MATRIX... BI-DIRECTIONAL PRINTING.



Continental U.S.A. Credit Card Buyers Outside Connecticut
CALL TOLL FREE 800-243-7428

To Order From Connecticut Or For Tech. Assist. Call (203) 354-9375

NETRONICS R&D LTD. Dept. PE
333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:

- ☐ COMPLETE FASTERM-64 TERMINAL (includes FASTVID-64 video board ASCII-3 keyboard, steel cabinet and power supply)... kit \$199.95 plus \$3 P&I... wired & tested \$249.95 plus \$3 P&I... graphics option: add \$19.95 to each of above
- ☐ COMPLETE SMARTERM-80 TERMINAL (includes SMARTVID-80 video board, ASCII-3 keyboard, steel cabinet and power supply)... kit \$299.95 plus \$3 P&I... wired & tested \$369.95 plus \$3 P&I
- ☐ FASTVID-64 VIDEO BOARD (requires +5 & +12V DC)... kit \$99.95 plus \$3 P&I... graphics option add \$19.95... wired & tested \$129.95 plus \$3 P&I... graphics option add \$19.95
- ☐ SMARTVID-80 VIDEO BOARD (requires +5 & +12V DC)... kit \$199.95 plus \$3 P&I... wired & tested \$249.95 plus \$3 P&I
- ☐ DELUXE STEEL TERMINAL CABINET... \$19.95 plus \$3 P&I
- ☐ ASCII-3 KEYBOARD (requires +5 & +12VDC)... kit \$69.95 plus \$3 P&I... wired & tested \$89.95 plus \$3 P&I
- ☐ POWER SUPPLY (powers ASCII-3 keyboard & video boards)... kit only \$19.95 plus \$2 P&I
- ☐ ZENITH VIDEO MONITOR (high resolution green phosphor)... wired & tested \$149.95 plus \$6 P&I
- ☐ TELEPHONE MODEM MODEL 103 O/A... wired & tested \$189.95 plus \$3 P&I
- ☐ DOT MATRIX PRINTER Comet I... wired & tested \$299.95 plus \$10 P&I
- ☐ RF MODULATOR MOD RF-1... kit only \$8.95 plus \$1 P&I
- ☐ 3FT-25 LEAD MODERATOR OR PRINTER/TERMINAL CONNECTOR CABLE... \$14.95 ea plus \$2 P&I

For Canadian orders, double the postage. Conn. res. add sales tax.

Total Enclosed \$

☐ Personal Check ☐ Cashier's Check/Money Order

☐ VISA ☐ MasterCard (Bank No. _____)

Acct. No. _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____

Zip _____

FOR ONLY \$129.95 Learn Computing From The Ground Up

Build a Computer kit that grows with you, and can expand to 64k RAM, Microsoft BASIC, Text Editor/Assembler, Word Processor, Floppy Disks and more.

EXPLORER/85

Here's the low cost way to learn the fundamentals of computing, the all-important basics you'll need more and more as you advance in computer skills. For just \$129.95 you get the advanced-design Explorer/85 motherboard, with all the features you need to learn how to write and use programs. And it can grow into a system that is a match for any personal computer on the market. Look at these features: 8085 Central Processing Unit, the microprocessor "heart" of the Explorer/85. (Join the millions who will buy and use the 8080/8085 this year alone)... Four 8-bit plus one 6-bit input/output ports from which you can input and output your programs, as well as control exterior switches, relays, lights, etc... a cassette interface that lets you store and reload programs you've learned to write... deluxe 2,000 byte operating system/monitor makes it easy to learn computing in several important ways... It allows simpler, faster writing and entering of programs... It permits access by you to all parts of the system so you can check on the status of any point in the program... It allows tracing each program step by step, with provision for displaying all the contents of the CPU (registers, flags, etc.)... and it does much more!

You get all this in the starting level (Level A) of the Explorer/85 for only \$129.95. Incredible! To use, just plug in your TVDC power supply and terminal or keyboard/display... if you don't have them, see our special offers below.

☐ Level A computer kit (Terminal Version)... \$129.95 plus \$3 P&I

☐ Level A kit (Hex Keypad/Display Version)... \$129.95 plus \$3 P&I

☐ Level B — This "building block" converts the motherboard into a two-slot \$100 bus (industry standard) computer. Now you can plug in any of the hundreds of \$100 cards available.

☐ Level B kit... \$49.95 plus \$2 P&I

☐ \$100 bus connectors (two required)... \$4.85 each, postpaid.

LEVEL C — Add still more computing power, this "building block" directly on the motherboard and expands the \$100 bus to six slots.

☐ Level C kit... \$39.95 plus \$2 P&I

☐ \$100 bus connectors (five required)... \$4.85 each, postpaid.

LEVEL D — When you reach the point in learning that requires more memory, we offer two choices: either add 4k of a memory directly on the motherboard, or add 16k to 4k of memory by means of a single \$100 card, our famous "JAWS".

☐ Level D kit (CHECK ONE)... 4k on-board... \$49.95 plus \$2 P&I... 16k \$100 "JAWS"... \$149.95 plus \$2 P&I... 32k \$100 "JAWS"... \$199.95 plus \$2 P&I... 48k \$100 "JAWS"... \$249.95 plus \$2 P&I... 64k \$100 "JAWS"... \$299.95 plus \$2 P&I

☐ Level E — An important "building block" it activates the 8k ROM/EPROM space on the motherboard. Now just plug in our 8k Microsoft BASIC or your own custom programs.

☐ Level E kit... \$5.95 plus \$2 P&I

☐ Microsoft BASIC — It's the language that allows you to talk English to your computer! It is available three ways:

☐ 8k cassette version of Microsoft BASIC (requires Level B and 12k of RAM minimum, we suggest a 16k \$100 "JAWS" — see above)... \$64.95 postpaid.

☐ 8k ROM version of Microsoft BASIC (requires Level B & Level E and 4k RAM; just plug into your Level E sockets. We suggest either the 4k Level D RAM expansion or a 16k \$100 "JAWS" — \$89.95 plus \$2 P&I)

☐ Disk version of Microsoft BASIC (requires Level B, 32k of RAM, floppy disk controller, 8" floppy disk drive)... \$325 postpaid.

TEXT EDITOR/ASSEMBLER — The editor/assembler is a software tool (a program) designed to simplify the task of writing programs. As your programs become longer and more complex, the assembler can save you many hours of programming time. This software includes an editor program that enters the programs you write, makes changes, and saves the programs on cassettes. The assembler performs the tedious task of translating symbolic code into the computer-readable object code. The editor/assembler program is available either in cassette or a ROM version.

☐ Editor/Assembler (Cassette version, requires Level B and 8k (min) of RAM — we suggest 16k "JAWS" — see above)... \$59.95 plus \$2 P&I

☐ Editor/Assembler (ROM version, supplied on an \$100 card, requires Level B and 4k RAM (min) — we suggest either Level D or 16k "JAWS")... \$99.95 plus \$2 P&I

8" FLOPPY DISK — A remarkable "building block" Add our 8" floppy disk when you need faster operation, more convenient program storage, perhaps a business application, and access to the literally thousands of programs and program languages available today. You simply plug them into your Explorer/85 disk system — it accepts all IBM-formatted CP/M programs.

☐ 8" Floppy Disk Drive... \$499.95 plus \$12 P&I

☐ Floppy Controller Card... \$199.95 plus \$2 P&I

☐ Disk Drive Cabinet & Power Supply... \$69.95 plus \$3 P&I

☐ Drive Cables (set up for two drives)... \$25.00 plus \$1.50 P&I

☐ CP/M 2.2 Disk Operating System: includes Text Editor/Assembler, dynamic debugger, and other features that give your Explorer/85 access to thousands of existing CP/M-based programs... \$150.00 postpaid.

NEED A POWER SUPPLY? Consider our AP-1. It can supply all the power you need for a fully expanded Explorer/85 (note: disk drives have their own power supply). Plus the AP-1 fits neatly into the attractive Explorer steel cabinet (see below).

☐ AP-1 Power Supply kit (8V @ 5 amps) in deluxe steel cabinet... \$39.95 plus \$2 P&I

NEED A TERMINAL? We offer you choices, the least expensive one is our Hex Keypad/Display kit that displays the information on a calculator-type screen. The other choice is our ASCII Keyboard/Computer Terminal kit, that can be used with either



1. Plug in Netronics's Hex Keypad/Display
2. Add Level B to convert to 64k RAM
3. Add 4k RAM

4. Plug in Level E here, or accept Microsoft BASIC or Editor/Assembler in ROM
5. Add two \$100 boards
6. Add your own custom circuits (prototyping area)
7. Connect terminal

a CRT monitor or a TV set (if you have an RF modulator)

☐ Hex Keypad/Display kit... \$69.95 plus \$2 P&I

☐ FASTERM-64 TERMINAL KIT — Featuring a 56 key ASCII Keyboard, 128 character set upper and lower case, 75 ohm output, 8 baud rates, 150 to 19,200 (switch select), RS232C or 20 MA output, 32 or 64 character by 16 line formats, complete with Deluxe Steel Cabinet and Power Supply... \$199.95 plus \$3 P&I

☐ RF Modulator kit (allows you to use your TV set as a monitor)... \$8.95 postpaid

☐ 12" Video Monitor (10MHz bandwidth)... \$139.95 plus \$5 P&I

☐ Deluxe Steel Cabinet for the Explorer/85... \$49.95 plus \$3 P&I

☐ Fan for cabinet... \$15.00 plus \$1.50 P&I

☐ ORDER A SPECIAL-PRICE EXPLORER/85 PAK — THERE'S ONE FOR EVERY NEED.

☐ Beginner Pak (Save \$26.00) — You get Level A (Terminal Version) with Monitor Source Listing (\$25 value) AP-1, 5-amp. power supply, Intel 8085 Users Manual... (Reg. \$199.95) SPECIAL \$169.95 plus \$4 P&I

☐ Experimentor Pak (Save \$53.40) — You get Level A (Hex Keypad/Display Version) with Hex Keypad/Display, Intel 8085 User Manual, Level A Hex Monitor Source Listing, and AP-1 5-amp. power supply... (Reg. \$279.95) SPECIAL \$219.95 plus \$6 P&I

☐ Special Microsoft BASIC Pak (Save \$103.00) — You get Levels A (Terminal Version), B, D (4k RAM), E, 8k Microsoft in ROM, Intel 8085 User Manual, Level A Monitor Source Listing, and AP-1 5-amp. power supply... (Reg. \$439.70) SPECIAL \$329.95 plus \$7 P&I

☐ Add a Rom-Version Text Editor/Assembler (Requires Levels B and D or \$100 Memory)... \$99.95 plus \$2 P&I

Starter 8" Disk System — Includes Level A, B floppy disk controller, one CDC 8" disk-drive, two-drive cable, two \$100 connectors; just add your own power supplies, cabinets and hardware... (Reg. \$1065.00) SPECIAL \$999.95 plus \$13 P&I

☐ 32k Starter System, \$1045.95 plus \$13 P&I

☐ 48k Starter System, \$1145.95 plus \$13 P&I

☐ 64k Starter System, \$1145.95 plus \$13 P&I

☐ Add to any of above Explorer steel cabinet, AP-1 five amp. power supply, Level C with two \$100 connectors, disk drive cabinet and power supply, two sub-D connectors for connecting your printer and terminal... (Reg. \$225.95) SPECIAL \$199.95 plus \$13 P&I

☐ Complete 64K System — Wired & Tested... \$1650.00 plus \$26 P&I

☐ Special! Complete Business Software Pak (Save \$625.00) — Includes CP/M 2.2 Microsoft BASIC, General Ledger, Accounts Receivable, Accounts Payable, Payroll programs... (Reg. \$1325) SPECIAL \$699.95 postpaid.

"P&I" stands for "postage & insurance." For Canadian orders, double this amount.

Continental Credit Card Buyers Outside Connecticut:

TO ORDER

Call Toll Free:

800-243-7428

To Order From Connecticut, or For Technical Assistance, Call (203) 354-9375

CP/M is a reg. trademark of Digital Research

★ (Clip and mail entire ad) ★

SEND ME THE ITEMS CHECKED ABOVE

Total Enclosed (Conn. Residents add sales tax): \$

Pay by:

☐ Personal Check ☐ Cashier's Check/Money Order

☐ VISA ☐ MASTER CARD (Bank No. _____)

Acct. No. _____ Exp. Date _____

Signature _____

Print Name _____

Address _____

City _____

State _____ Zip _____

NETRONICS Research & Development Ltd.
333 Litchfield Road, New Milford, CT 06776

COMPUTER BITS

Accessories and Software

ISUPPOSE many of you, as I do, keep an eye out for new products that will make your system more powerful or easier to use. The SK8088 cpu board from SKI Electronics is a good example. This is a \$329 dual-mode, 16-bit, S-100-bus, board that plugs directly into your present S-100 system and works in conjunction with your 8-bit cpu card.

The 8-bit processor board acts as the bus controller. However, when 16-bit software is loaded into the computer, control passes to the SK8088. To avoid taking away 8-bit software compatibility, the SKI board permits switching back to the 8-bit board when necessary. This is a technique of master/slave operation whereby a system of bus arbitration and semaphores (flags) is used to switch cpu masters between cycles.

To take advantage of the full power of the system arrangement permitted on the IEEE 696 (S-100 bus), the board implements the full 24-bit addressing for a 16M-byte address range. It comes in a 5-MHz standard version, with an 8-MHz upgrade available. You don't have to worry about getting rid of your 8-bit memory either. The SK8088 works well, but slower, with 8-bit memory. However, it takes two bus cycles for a 16-bit transfer.

If you decide to get this board, be aware that it may not work with all so-called S-100 systems. The problem is in the implementation of the bus. In older versions (Altair, Imsai) the bus is defined a great deal differently than in IEEE 696 conventions. In addition, these older machines have ground planes and power rails. So be sure you understand what you have before you buy a board.


Using RAM Storage. I recently ran across a company doing something I really considered significant with high-speed RAM—using it for storage. The company, Axlon Inc., offers some very unique memory products, including Ramdisk, which is for the Apple or IBM PC and has 320K bytes of 200-ns memory and battery backup. The memory functions like two 35-track floppy-disk drives and is compatible with the necessary operating systems. The company says the price is about the same as a dual floppy drive.

Axlon offers similar products for the Atari, but the memory products are designed to plug into an available cartridge slot. You have the choice of a Ramcram to boost your Atari 400 or 800 to 48K or

the Ramdisk for just the Atari 800. This gives you 128K of memory that acts as a high-speed disk drive.

If you are interested in communications, Axlon also has a personal communication terminal. Measuring $1\frac{5}{8}'' \times 3\frac{9}{16}'' \times 6\frac{3}{4}''$ and weighing 11 oz., the handheld unit has a tactile keyboard with 43 functional keys to provide 64 upper-case ASCII characters. The display is a 16-character fluorescent indicator and has a 220-character receive memory that permits scrolling. The terminal, called the Hotline, has a "cool" price of \$400.

You have probably noticed the increased interest in semiconductor nonrotating memory ("semidisks"). They increase your system operational throughput without impacting its operational aspects. For example, the Magnolia Invisible Disk that I discussed last month is used in my Zenith 89 laboratory system—especially when performing some system or software tests. We load the software into this very high-speed disk and reduce our overall access time. You do have to be careful, however, with some software that expects everything to be on the lowest defined system diskette, rather than the logged-in disk. Also you have to be certain that your power supply is solid, since a power drop-out will cause you to lose valuable data on the semidisk.

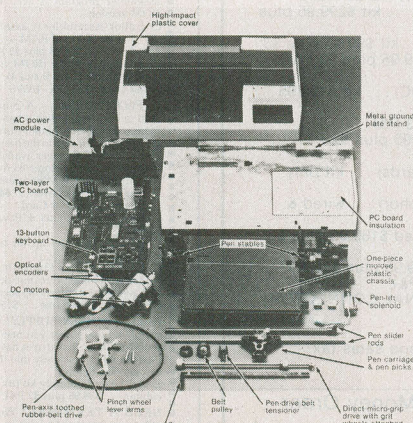

Parts breakdown of Hewlett-Packard's 7470 plotter shows simplicity of design.

The Master Plotter. If you have an extra \$1550 and want a sophisticated plotting system, then the HP 7470 is exactly what you are looking for. This unit takes advantage of a new low-cost plotting technique and has a resolution (step size) or $25\text{ }\mu\text{m}$ ($1/1000\text{ in.}$), a repeatability of $100\text{ }\mu\text{m}$, pen acceleration of 2 Gs, and pen-down and pen-up velocities of 35 and 50 cm/s, respectively. It uses either $8\frac{1}{2}''$ or $11''$ paper.

One of the special features of the plotter is the way it senses, picks and replaces its pens. It is aware at all times of which pen to use, where to find it, and where to return it. It can be programmed to select from either of two pen groups at appropriate moments during a plot. The system automatically caps and uncaps the pens to keep the ink from drying out.

The 7470 uses Hewlett-Packard's microgrip drive system developed last year for large-format printers. It avoids heavy moving arms and paper transport drums and belts. The technique involves moving the paper in one direction (x axis) and the pen in the other (y axis). In this way, the inertia is minimized to include only the mass of the drawing medium and the pen. The microgrip drive consists of two rotating metal grip wheels, which hold each edge of the paper firmly against a hard-rubber pinch wheel.

The microscopic points created in the paper by the wheels are used by the plotter for realigning and maintaining registration to ensure repeatability. This is not found on similar plotters.

The plotter uses an MC6802 microprocessor, has 8K bytes of ROM for storing all the plotting programs (including irregular-shape tables) and interfaces either through the HP-IB bus (IEEE-488) or RS-231C, thus making it universal to virtually any microcomputer currently available.

I haven't had time yet to use the plotter extensively, so a report on how well it works will have to wait till later.

Speaking of Software. With an increasing emphasis on computer communications, it is not surprising that software companies are rapidly getting on the communications bandwagon with many products. Many of them we have covered in the past. Recently, though, we came across some interesting packages developed by IE systems, Inc. to permit micros to speak to mainframes. All the software works with standard protocols and greatly upgrades the state of the microcomputer communications art.

One of these packages is the Bisynd-80 group—designed to support synchronous communications between CP/M systems and IBM or similar hosts (any system with bisync protocols). Features include a user configuration module, hardware diagnostics, line trace, error checking, carriage control decoding and flexible EBCDIC/ASCII translation.

Another package, the 80/3780, provides full IBM 2780/3780 emulation on 8080, 8085 and Z80-based systems. This software costs \$990. Note that you'll only need this package if you plan to op-

erate in the IBM environment as a Remote Job Entry (RJE) terminal. Typically, this implies short-haul (under 20 miles) communication over dedicated metal or fiber-optic lines at speeds of 9600 baud and above.

More practical from the standpoint of the microcomputer user, are asynchronous (character) communications. IE supports 8080/8085, Z80 or 8088/8086 systems with at least 16K of RAM, one floppy CP/M or MSDOS and an asynchronous serial port (Z80-SIO), 8251, 8250, 8274, NEC 7201, TMS 5501, or PMMI-103) for \$495.

Asynchronous communications is normally established over ordinary phone lines using modems that transfer data at rates of 110 to 1200 bps. Be aware though that, on dedicated short-haul lines, 19.2K baud is possible.

All of the IE's software is available on diskette preconfigured to your requirements. If you own a host computer such as a VAX, PDP-11 or DEC10 or 20, IE can support your communications needs for these mainframes also at prices from \$1940 to \$5940.

Interestingly, many of the functions that take place in asynchronous communications can be likened to a disk system. If you think of your communications set-up as being like a diskette, with each device scattered around the tracks (interleaved), you can get an idea of the functions of software that uses polling techniques. Incidentally, this is the technique used in networking software to allocate resources to the network and basically avoid collisions.

Communication Terminals. Because low-cost communication is becoming increasingly important, two companies are offering specialized terminals. Tymshare, through Equipment Products Marketing, has the Scanset Models 410 at \$495 and Model 415 for \$649. The first requires an external modem but provides automatic log-in, the second includes a built-in modem, automatic dialer, and automatic log-in.

Both models take up one square foot of desk space, have a 9" diagonal screen with 24 lines by 40 or 80 characters, and have limited graphics capability. The terminals were built by the French firm Matra and they use Cermatek modems and filters.

Each terminal has six multi-function keys and permits up to 12 user-defined tasks to be assigned to the programmable keys. The autodialer feature allows dialing up to 36 numbers stored in the terminal's battery-supplied CMOS memory. User menus guide the process and a built-in speaker lets you know the line status. Unfortunately, Matra uses a small keyboard with flat button keys, making the system almost unusable as a true data-entry terminal.

Offering similar capability but with a full-size keyboard and modular approach is the Zenith Data Systems ZT-1 communication terminal. Priced at \$695, the ZT-1 is housed in a keyboard with 63 functions—26 alphabetic, 10 numeric, 4



Zenith ZT-1 communication terminal.

cursor, and special function keys. Like the Scanset, the ZT-1 is Bell-103 compatible. It has a 300-baud modem, plugs into any standard RJ-11C, 12C, or 13C jack, supports pulse dialing, has NTSC composite video (RS-170 compatible) and provides a serial I/O from 110 to 2400 baud. In addition, it has an 8-bit Centronics parallel port for printer support.

Zenith has gone to a great deal of trouble in the firmware to provide single-key dialing, sign-on, and all the necessary communication functions. The user can change the terminal's communication parameters, including word size, parity, and stop bits. Numbers can be added to the 26-slot directory.

More Than a Game. Computer games aren't always games in the truest sense. Two that we recently ran across are Roots/M from Commsoft (665 Maybell Ave., Palo Alto, CA 94306. Tel. 415-493-2184) for \$124.95, and Unit Conversion Master from Mako Data Products (1441-B N. Red Gum, Anaheim, CA 92806. Tel. 714-632-8583) for \$19.95. Both are written to operate under CP/M and can be used with virtually any terminal.

The Roots-M package is a unique program designed to help you trace your family tree. It comes with an extremely well-written manual with illustrations that not only explains the software but describes genealogy in general.

The software works by using a series of fill-in screens for entering pertinent data—marital and blood relationships,

FOR MORE INFORMATION

For additional information on the products mentioned here, contact the manufacturer directly:

Axlon Inc.,

170 N. Wolfe Rd.
Sunnyvale, CA 94086
408-730-0216

Equipment Product Marketing

20705 Valleyu Green Dr.
Cupertino, CA 95014
408-448-6111

Hewlett-Packard Corp.

3000 Hanover St.
Palo Alto, CA 94304
415-857-1501

IE Systems Inc.

Box 359, 98 Main St.
Newmarket, NH 03857
603-659-5891

SKI Electronics

3134 Woods Way
San Jose, CA 95148
408-274-3131


Zenith Data Systems

1000 Milwaukee Ave.
Glenview, IL 60025
312-391-8181

letters, financial records, travel information—anything you can find out about your ancestors. The program uses this data to generate a pedigree chart, and draws relationships between individuals, how families intertwine, and traces all the vital statistics.

Roots/M is one of the best data-base management systems we have seen, and it is very easy to use. The authors have provided numerous well-planned help messages, and tips on finding out who you really are.

The Mako Data Unit conversion Master is primarily designed to work with the Heath H-89 system, and uses its screen attributes to good advantage. What makes this package exciting is that you can enter length, volume, acceleration, mass, etc. in whatever units your original data is given and then determine the correct conversion to the units of any other system (including cgs). Over 18,000 possible conversions are at your fingertips. The package is not really a game, and it strips away uncertainty when dealing with unfamiliar units or unwieldy data. ◇

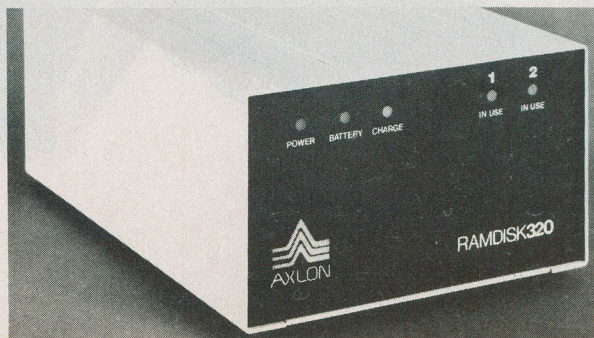

The Axlon Ramdisk offers 200-ns access and 320K bytes of storage for Apples and IBM PCs.

HEATH/ZENITH A GIANT STEP AHEAD IN

Computer power, printer speed, hard disk storage – all in one system.

The three elements you need for smooth, rapid data handling are together now in one Heath/Zenith system. For word processing, business and financial applications, or custom programming – this is the performance standard evolving in computer technology. It's what you expect from a *strong partner*.

All-In-One Computer

The heart of the system is the Heath/Zenith 89 Computer, a complete, stand-alone unit with professional keyboard, smart video terminal and 5¼-inch disk drive. It's easy to use for people having little or no experience – yet it can also run extended languages like BASIC, COBOL, FORTRAN and Pascal.

The 89 comes with 48K bytes RAM, expandable to 64K. It has two Z80 microprocessors, one for computer functions, one for terminal functions. And three serial I/O ports for interface with printers and modem.

The video display features a 12-inch diagonal, high-resolution CRT that's easy on the eyes. It displays up to 2,000 characters at a time, 24 lines (plus 25th status line) by 80 characters, with full cursor control. Also 33 block graphic characters for charts and graphs.

The heavy-duty keyboard follows standard typewriter format for easy operator training. All terminal functions are programmable from keyboard or I/O ports.

The 5¼-inch floppy diskette stores 100K bytes of information and interfaces on line with the Heath/Zenith 67 Hard Disk System.

Winchester Disk System

The 67 Disk System features one hard disk and one 8-inch, soft-sectored floppy for total on-line storage of 10.782 megabytes (formatted). That's a huge data base.

The floppy is double-sided, double-density and can also operate in single-sided or single-density modes, compatible with standard IBM 3740 format.

The 67 features write-protect switches for both drives to prevent accidental erasure of information. The average access time of the hard disk drive is 70 milliseconds.

High-speed printer

The Heath/Zenith 25 Printer is a heavy-duty, high-speed, dot matrix printer that gives you sharp, clear printouts. It prints over 150 characters per second with whisper-quiet smoothness.

The entire 95-character ASCII set prints in upper case and lower case with descenders, in a 9 x 9 matrix. Also, 33 block graphic characters let you create graphs and charts. All functions and timing are microprocessor-controlled.

It uses standard edge-punched papers and features a convenient cartridge ribbon for easy, no-mess replacement.



MICROCOMPUTERS— SYSTEM PERFORMANCE

Versatile software and accessories


The Heath/Zenith System offers you a choice of operating systems, including popular CP/M.

There are programs for word processing, business applications, and versatile utility functions. And the Heath User's Group offers a library of over 500 low-cost programs for home, work or play.

For your custom programs, Microsoft languages are available in BASIC (compiler and interpreter), FORTRAN and COBOL. Or learn to write and run your own programs with special self-study programming courses for Assembly, BASIC, Pascal or COBOL.

Free demonstration awaits you at your Heathkit Electronic Center

Pick the store nearest you from the list at right. And stop in today for a demonstration of a Heath/Zenith system. If you can't get to a store, send for our new, FREE Heath/Zenith Computer Catalog — with the latest, most advanced hardware and software available. Write to Heath Co., Dept. 010-924, Benton Harbor, MI 49022.

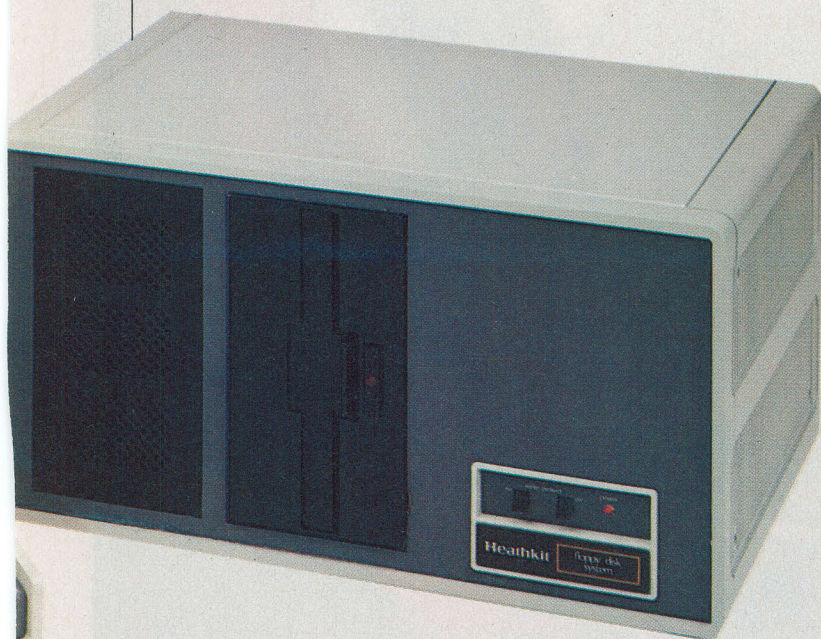

Visit Your Heathkit Electronic Center*

where Heath/Zenith Products are displayed, sold and serviced.

- | | | |
|--|---|---|
| PHOENIX, AZ
2727 W. Indian School Rd.
602-279-6247 | INDIANAPOLIS, IN
2112 E. 62nd St.
317-257-4321 | CINCINNATI, OH
10133 Springfield Pike,
Woodlawn
513-771-8850 |
| TUCSON, AZ
7109 E. Broadway
602-885-6773 | MISSION, KS
5960 Lamar Ave.
913-362-4486 | CLEVELAND, OH
28100 Chagrin Blvd.
216-292-7553 |
| ANAHEIM, CA
330 E. Ball Rd.
714-776-9420 | LOUISVILLE, KY
12401 Shelbyville Rd.
502-245-7811 | COLUMBUS, OH
2500 Morse Rd.
614-475-7200 |
| CAMPBELL, CA
2350 S. Bascom Ave.
408-377-8920 | KENNER, LA
1900 Veterans
Memorial Hwy.
504-467-6321 | TOLEDO, OH
48 S. Byrne Rd.
419-537-1887 |
| EL CERRITO, CA
6000 Potrero Ave.
415-236-8870 | BALTIMORE, MD
1713 E. Joppa Rd.
301-661-4446 | OKLAHOMA CITY, OK
2727 Northwest
Expressway
405-848-7593 |
| LA MESA, CA
8363 Center Dr.
714-461-0110 | ROCKVILLE, MD
5542 Nicholson Lane
301-881-5420 | FRAZER, PA
630 Lancaster Pike
(Rt. 30)
215-647-5555 |
| LOS ANGELES, CA
2309 S. Flower St.
213-749-0261 | PEABODY, MA
242 Andover St.
617-531-9330 | PHILADELPHIA, PA
6318 Roosevelt Blvd.
215-288-0180 |
| POMONA, CA
1555 N. Orange Grove Ave.
714-623-3543 | WELLESLEY, MA
165 Worcester Ave.
617-237-1510 | PITTSBURGH, PA
3482 Wm. Penn Hwy.
412-824-3564 |
| REDWOOD CITY, CA
2001 Middlefield Rd.
415-365-8155 | DETROIT, MI
18645 W. Eight Mile Rd.
313-535-6480 | WARWICK, RI
558 Greenwich Ave.
401-738-5150 |
| SACRAMENTO, CA
1860 Fulton Ave.
916-486-1575 | E. DETROIT, MI
18149 E. Eight Mile Rd.
313-772-0416 | DALLAS, TX
2715 Ross Ave.
214-826-4053 |
| WOODLAND HILLS, CA
22504 Ventura Blvd.
213-883-0531 | HOPKINS, MN
101 Shady Oak Rd.
612-938-6371 | FORT WORTH, TX
6825-A Green Oaks Rd.
817-737-8822 |
| DENVER, CO
5940 W. 38th Ave.
303-422-3408 | ST. PAUL, MN
1645 White Bear Ave.
612-778-1211 | HOUSTON, TX
1704 W. Loop N.
713-869-5263 |
| AVON, CT
395 W. Main St. (Rt. 44)
203-678-0323 | BRIDGETON, MO
3794 McKelvey Rd.
314-291-1850 | SAN ANTONIO, TX
7111 Blanco Road
512-341-8876 |
| FT. LAUDERDALE, FL
7173 W. Broward Blvd.
Plantation
305-791-7300 | OMAHA, NE
9207 Maple St.
402-391-2071 | MIDVALE, UT
58 East 7200 South
801-566-4626 |
| HIALEAH, FL
4705 W. 16th Ave.
305-823-2280 | ASBURY PARK, NJ
1013 State Hwy. 35
201-775-1231 | ALEXANDRIA, VA
6201 Richmond Hwy.
703-765-5515 |
| JACKSONVILLE, FL
8262 Arlington Expwy.
904-725-4554 | FAIR LAWN, NJ
35-07 Broadway (Rt. 4)
201-791-6935 | VIRGINIA BEACH, VA
1055 Independence Blvd.
804-460-0997 |
| TAMPA, FL
4019 W. Hillsborough Ave.
813-886-2541 | AMHERST, NY
3476 Sheridan Dr.
716-835-3090 | SEATTLE, WA
505 8th Ave. N.
206-682-2172 |
| ATLANTA, GA
5285 Roswell Rd.
404-252-4341 | JERICHO, L.I. NY
15 Jericho Turnpike
516-334-8181 | TUKWILA, WA
15439 53rd Ave. S.
206-246-5358 |
| HONOLULU, HI
98-1254 Kaahumanu St.,
Pearl City
808-487-0029 | ROCHESTER, NY
937 Jefferson Rd.
716-424-2560 | MILWAUKEE, WI
5215 W. Fond du Lac
414-873-8250 |
| CHICAGO, IL
3462-66 W. Devon Ave.
312-583-3920 | N. WHITE PLAINS, NY
7 Reservoir Rd.
914-761-7690 | <small>*Units of Veritechnology
Electronics Corporation in
the U.S. Prices, specifica-
tions and product availability
subject to change without
notice.</small> |
| DOWNERS GROVE, IL
224 Ogden Ave.
312-852-1304 | GREENSBORO, NC
4620-C W. Market St.
919-299-5390 | |

HEATH/ZENITH

Your strong partner

CIRCLE NO. 22 ON FREE INFORMATION CARD

Loran-C

A Marine Long Range Navigation Tool

by Ken Englert

Microprocessor technology lowers prices 20-fold and reduces equipment size. Here's how Loran-C pinpoints locations many hundreds of miles from a coast line, plus an equipment buyer's guide.



MIX the serious boating enthusiast's need for accurate navigation when out of sight of a coastline with today's electronics, and you get a minor miracle called Loran-C (Long Range Aid to Navigation). And with equipment prices down from \$20,000 to under \$1000, you don't have to be a wealthy yachtsman to enjoy its benefits.


What is Loran? Loran is a radio navigation system using land-based transmitters and shipboard receivers to enable anyone within reception range to easily determine his position at any time, in any weather. Loran C (other forms of Loran have been phased out) provides a positioning accuracy of at least one-tenth of a nautical mile. In addition, it offers a "repeatability" (measuring how precisely you can return to a given set of coordinates) that's theoretically accurate to within 50 feet.

Loran transmitter stations now blanket virtually the entire North American coastline, parts of the North Atlantic and Europe (including most of the Mediterranean), the North Pacific, and the Caribbean. Daytime range of a Loran-C transmitter is about 1200 miles, while nighttime coverage extends to an estimated 2000 miles.

Loran's usefulness is not restricted to boating. It can prove invaluable for rescue work in the mountains or desert or for recreation in remote areas—anyplace, in short, that involves the question: "Where am I?"

How Loran-C Works. Loran operates on the basis of a specific amount of time it takes for a radio signal to travel between any two geographical points. Although travelling at the speed of light, radio waves still require a finite and measurable time to traverse the distance between a given transmitter and a receiver. To effect this, the Coast Guard maintains a series of land-based transmitters that broadcast Loran signals (at a frequency of approximately 100 kHz). When picked up by an on-board Loran receiver, these signals can be processed into very precise positional information.

The key to accuracy with Loran-C is precise signal timing. A group or "chain"

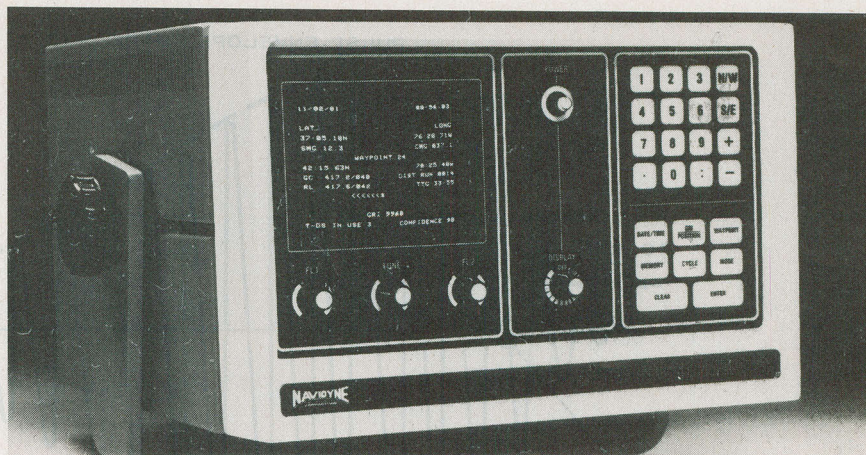

The Navidyne ESZ-7000 shows all navigation and routing information simultaneously on a CRT display.

of Loran transmitters works together in an area and transmits signals that are in exact synchronization. The master station of the group transmits nine pulses. Simultaneously, the secondary stations (there may be two to four secondary stations in any Loran chain) transmit eight pulses at a slight interval after the master signal, with each secondary station transmitting in sequence. The on-board receiver is smart enough to recognize the master and secondary signals and differentiate between them (as well as those Loran signals received from other parts of the world) by unique frequency and pulse characteristics.

The Loran-C receiving unit is broken down into two sections: the actual receiver, whose job it is to pull the signals out of the air and amplify them to a useful level, and the computing section, whose function is to extract the data that tell the user exactly where he is. The computing side very precisely measures the arrival time of each of the received signals (in microseconds) from the master and secondary station transmitters. It is the difference in the arrival times between the master and secondary signals that is used to calculate your position in reference to those transmitters.

This time difference (called TD) corresponds to a hyperbolic line that describes a specific unit of time lying between each station. Different times will correspond to a different hyperbolic line. Each time-difference line can be used by the Loran operator as a navigation line of position (LOP).

Here's how it works: Let's assume a master station at point *M* and a secondary station at point *W*, as in Fig. 1. Our on-board receiver picks up both signals and displays a digital readout of the differential time interval of the signals. We take this number, called a TD, and plot a LOP corresponding to that value on a chart with Loran time difference lines overlaid on it. Let's say that our Loran

receiver gives us a reading of 13370.0. Although there are many points on our chart that will correspond to the same 13370.0-microsecond time difference, they will all be plotted along one line. This line of position is similar to a line of longitude or latitude. It differs in that it is not perfectly straight, but hyperbolic in shape. Also, it is located somewhere between the two stations and, of course, is restricted to the reception range of the Loran signals.

Now, we still have not pinpointed our exact location. All we have done is place ourselves somewhere along a line on a chart. This is like saying we are somewhere on Main Street. To be precise, we need a cross-street reference. To find it, we measure the time difference between the master station and another secondary station in the same Loran chain. This time-difference reading places us on another line (Fig. 2). Next, we observe where the two LOPs intersect on our chart. If our boat were to move in any direction, the TD readings on the Loran would chronicle our journey at any given moment.

The Loran Signal. A pulse-coded low frequency (LF) signal is used in the Loran-C system. Loran operates between the frequencies of 90 and 110 kHz, with a carrier frequency of 100 kHz. A low-frequency band was chosen to take advan-

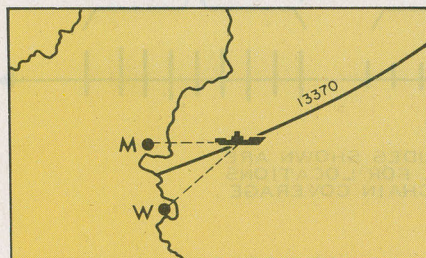


Fig. 1. A line of position (LOP) plotted between two Loran-C stations.

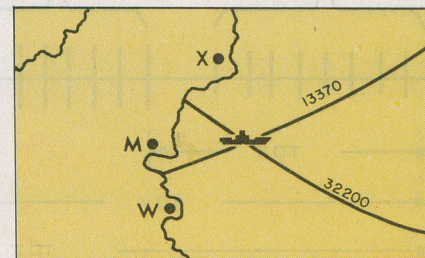


Fig. 2. A second reading referred to a third station gives a cross reference.

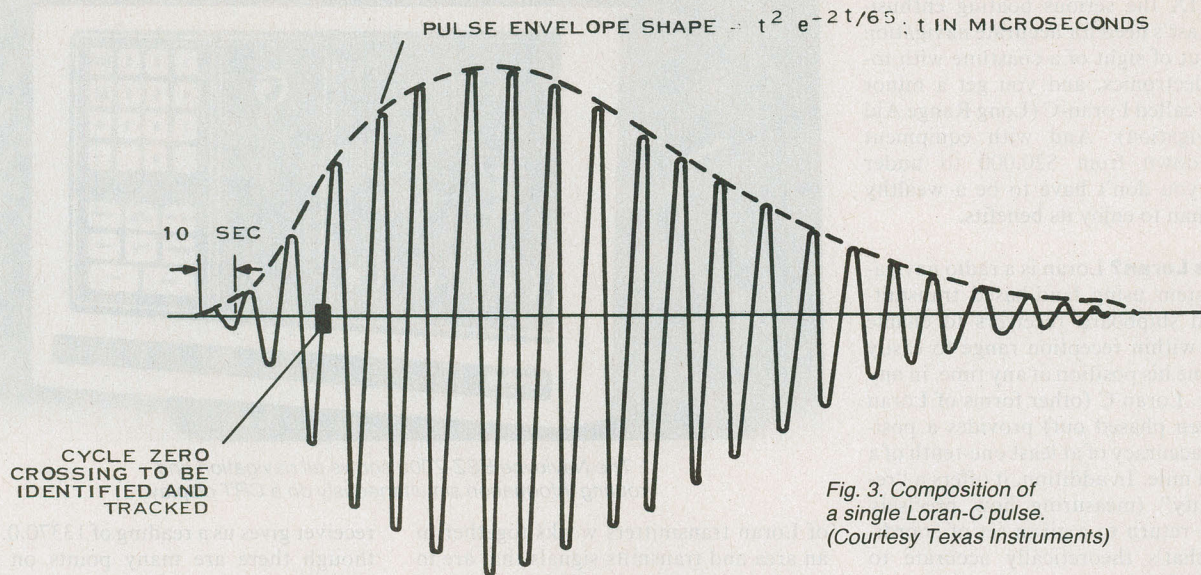


Fig. 3. Composition of a single Loran-C pulse. (Courtesy Texas Instruments)

tage of its stable and predictable propagation characteristics and relatively long range (typically, 800 to 1200 nautical miles).

Each station in the Loran chain transmits a series of pulses of specific number and duration (a single Loran pulse is shown in Fig. 3). The master and secondary stations in any Loran chain transmit groups of these pulses and form a combined Loran chain signal at a specific GRI (Group Repetition Interval). The master station signal requires 10,000 μ s for transmission, while each secondary requires 8000 μ s. The master station pulse group is made up of 8 pulses with a 1000- μ s spacing between them, followed by a ninth pulse with a 2000- μ s spacing from the eighth pulse. Secondary station pulse groups can be recognized by eight pulses spaced 1000 μ s apart.

Figure 4 shows a typical Loran GRI made up of one master and three secondary transmitter signals. Notice that the pulses forming the first secondary station

signal, designated "X," are not transmitted until the master pulse group has completed its transmission. Similar time delays place the second (Y) and third (Z) secondary signals in their respective positions in the GRI sequence. At that point, the master station begins to re-broadcast its signal and the sequence is repeated. The spacing between the pulse groups varies according to the Loran receiver's location within a given Loran chain.

Figure 5 shows many lines of position formed by plotting points where the TDs of the received signals of M and X are the same. By plotting a series of LOPs between the master and each of its secondaries, we create a grid-like overlay on a chart for the area of interest. This is the actual Loran chart.

How a Loran Receiver Works. Now that we have a good idea of how a Loran system works and what the signal looks like, let's discuss how an on-board receiver

recognizes, tracks and processes that signal, using Texas Instrument's TI-9000 as a representative model.

Figure 6 is a block diagram of the TI-9000 receiver. An accompanying flow chart shows the sequence of what is taking place inside the receiver.

The first thing that happens when you switch the set on is that you trigger a system self-check and a processing routine called RESET. The RESET function has four tasks to perform: (1) checking the ROMs; (2) checking the RAMs; (3) initializing the RAMs for Broadband Search; and (4) waiting for you to enter the GRI for the Loran chain in your area via the receiver's front panel keyboard.

At the end of the initial RESET sequence, and before you enter your GRI (an interval of approximately two seconds), the receiver's display will show all "8s," showing it is ready for operation.

After the GRI has been entered, the set immediately goes into Broadband Search and starts to look for signals from the

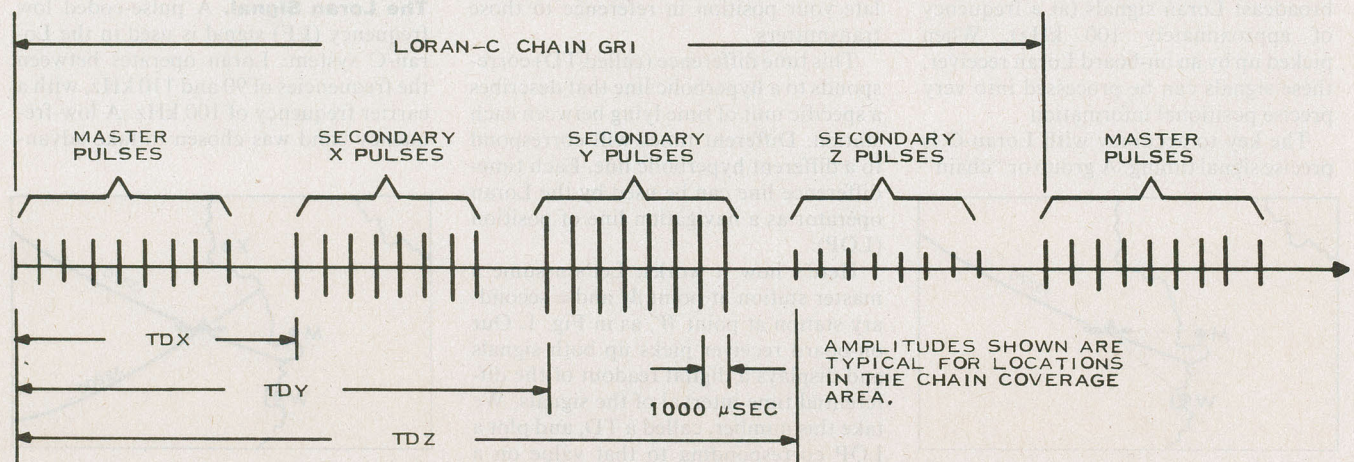


Fig. 4. The received Loran-C signal Group Repetition Interval. (Courtesy Texas Instruments)

Loran-C

master and secondary stations from your selected GRI. The input into the antenna's preamplifier consists of a 100-kHz r-f pulse train. The r-f power supply board takes the 100-kHz signal, processes it through a narrowband filter, and produces a digital output consisting of r-f Out and Envelope (ENV) Out signals. (As its name implies, the power-supply section of the r-f/Power Supply Board also takes the 11-to-16-V dc input and creates

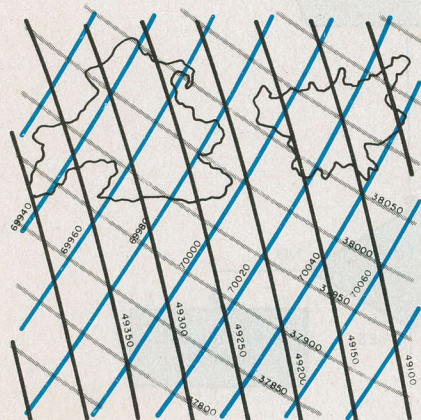


Fig. 5. The actual Loran chart is a grid-like overlay of LOPs.

the regulated +5, +15, -15, and +180 V dc output voltages which are required in other parts of the receiver.) The r-f signals are fed to a sampling register on the Processor Board. The Timing and Strobing Board controls the sampling register and serially shifts the output data to the Communications Register Unit (CRU), which is a part of the microprocessor.

The microprocessor then processes the data and identifies the master and secondary signals. (It is mandatory that the master signal be found and used as the starting point.) After the master is isolat-

ed, a broadband search identifies the secondary signals. If the secondary signals are not found in the broadband search, the process will be automatically repeated by starting over and looking for the master. This process is called Background Search and is performed automatically if the secondary signals are missed.

The microprocessor is controlled by a stored instruction program built into its ROMs, and by the keyboard instructions it gets from the operator. RAMs are used by the microprocessor for data storage and retrieval. The microprocessor also cues the Timing and Strobing Board in the generation of system-timing pulses.

After processing, the data output is

sent to the Display/Control Board, where decoding takes place. The end product—the Loran time-difference reading—is shown on the receiver's front panel digital display.

Using a Loran-C Receiver. Operating a Loran-C set is simple. For an illustration, let's again look at the Texas Instruments Model TI-9000. It features a keyboard for entering data and selecting navigational information. Once you understand it you can enter and recall navigational information effortlessly.

The keyboard consists of 20 keys divided into four functional groups (see Table I).

Increasing Accuracy. Given a choice of more than two TDs (up to four, depending on the Loran chain), the operator can increase his accuracy by selecting those that assure the best possible position determination. Three factors determine TD accuracy: the distance from the transmitting stations, baseline extensions, and TD crossing angles.

The distance from the stations is important because stations more than about 1200 miles away tend to be subject to noise and the possibility of an added time delay from sky-wave interference. (Remember, we are relying on the stability and predictability of ground-wave reception for Loran-C accuracy.)

The baseline for a TD is a straight line connecting the master and the secondary stations. The baseline extension is formed by extending this line beyond



Datamarine's CDI remote steering indicator allows the user to put his boat on course and then indicates deviation from a straight line path.



SRD's CLX-85M gives digital reading of distance to first waypoint, bearing, distance off course, and cruising speed.

TABLE I—KEYBOARD LAYOUT
(Texas Instruments Model TI-9000)

Data Entry Keys

0—9 Digit Keys

Enters numbers 0 through 9

+ / -

Change Sign Key

Makes it possible to enter a negative as well as a positive number.

CLR

Clear Key

Clears or erases numbers in the display.

ENTR

Enter Key

Instructs unit to enter the number seen on the display into the internal computer's memory.

Primary Operating Keys

GRI

Group Repetition Interval Key

Allows operator to choose which Loran chain or group of Loran transmitters they wish to receive signals from. A four digit code is used to select the proper stations to "listen" for.

AUTO

Automatic Key

Provides automatic display of up to 4 selected TDs. (As this model can only display one TD reading at a time, several TDs are displayed sequentially for 5 seconds at a time.)

TD

Time Difference Key

Can be used to "freeze" a particular time difference reading for continuous display. This key is also used to store and recall selected TDs.

Secondary Function Keys

MON

Monitor Key

Allows operator to select one of two codes in monitoring Loran transmitting station performance.

MON-1—Indicates Signal-to-Noise ratio of the received signal. A reading of 999 is the highest and best. Readings below approximately 670 indicate a poor signal.

MON-2—Oscillator offset frequency. The number displayed indicates the number of cycles (out of a million cycles) that the receiver's internal oscillator is off frequency. A number greater than plus or minus 30 indicates your set will have to be adjusted.

MODE

Mode Key

Displays the 6-stage signal processing sequence of your receiver and aids in acquiring a usable signal.

Special Function Keys

TRK

Allow the operator to override the signal selection process under certain adverse conditions to make an otherwise unusable signal usable.

ΔTD

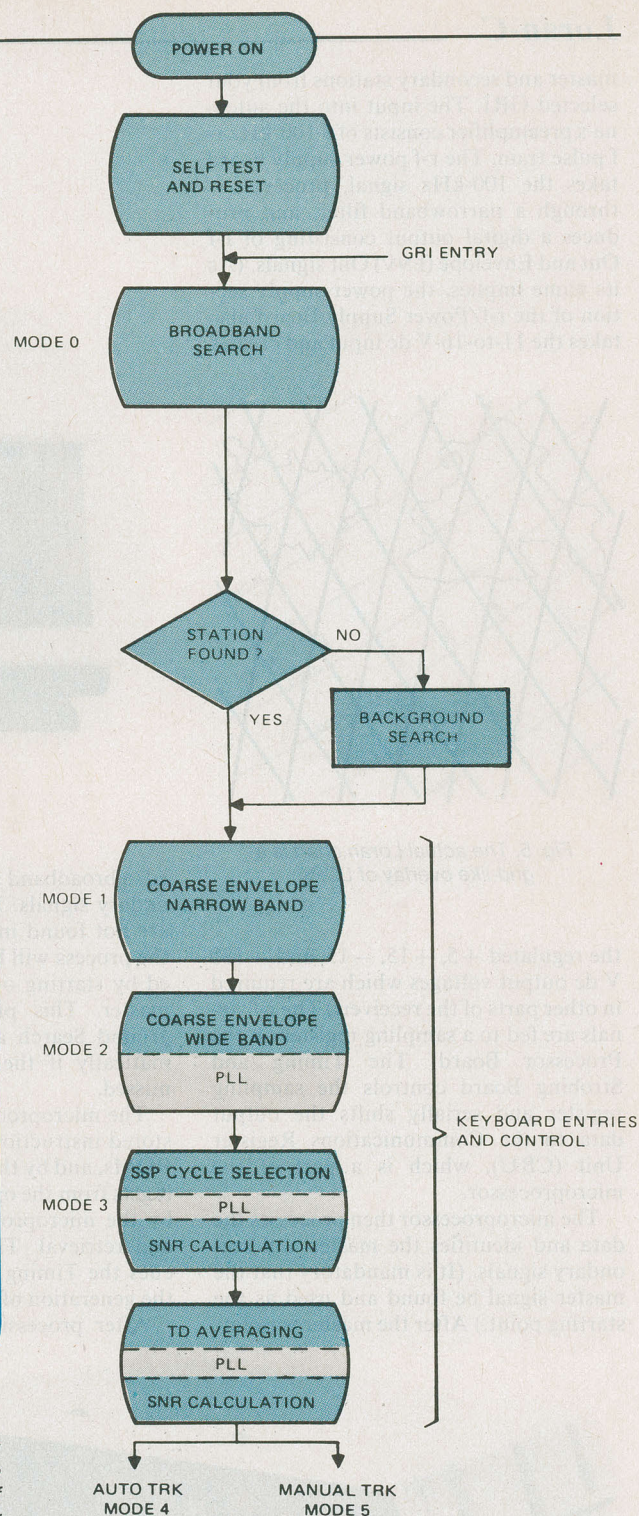


Fig. 6. At right is a flow chart showing the sequence of events taking place inside a receiver. A block diagram of the Texas Instruments TI-9000 receiver is shown on the opposite page.

both stations. The significance of this line is that the use of TD LOPs on or near the baseline extension will adversely affect your accuracy since a relatively large distance will produce a relatively small change in a displayed TD.


TD crossing angles (formed when two TD LOPs cross on a chart) also affect accuracy. Your reading will be most accurate when the angle is 90°, and less accurate the further you get from 90°.

Selecting a Loran Receiver. Variety is an understatement when describing all the new models of Loran-C receivers available today. Here are some guidelines to help you make an intelligent selection.

For good precision, your Loran should read-out in at least six digits. The displays themselves come in several basic types including incandescent, fluorescent, gas discharge, LED, LCD, and even a CRT. That choice is mostly sub-

jective and should be considered with your particular needs in mind.

Since you need two TD readings to determine your position, a Loran that has a dual readout is easiest to use. Less-expensive models employ a single TD readout—alternating readings every couple of seconds. Other single-readout models display the last few digits of two TD readouts (since the first few digits will not change in a given area anyway).

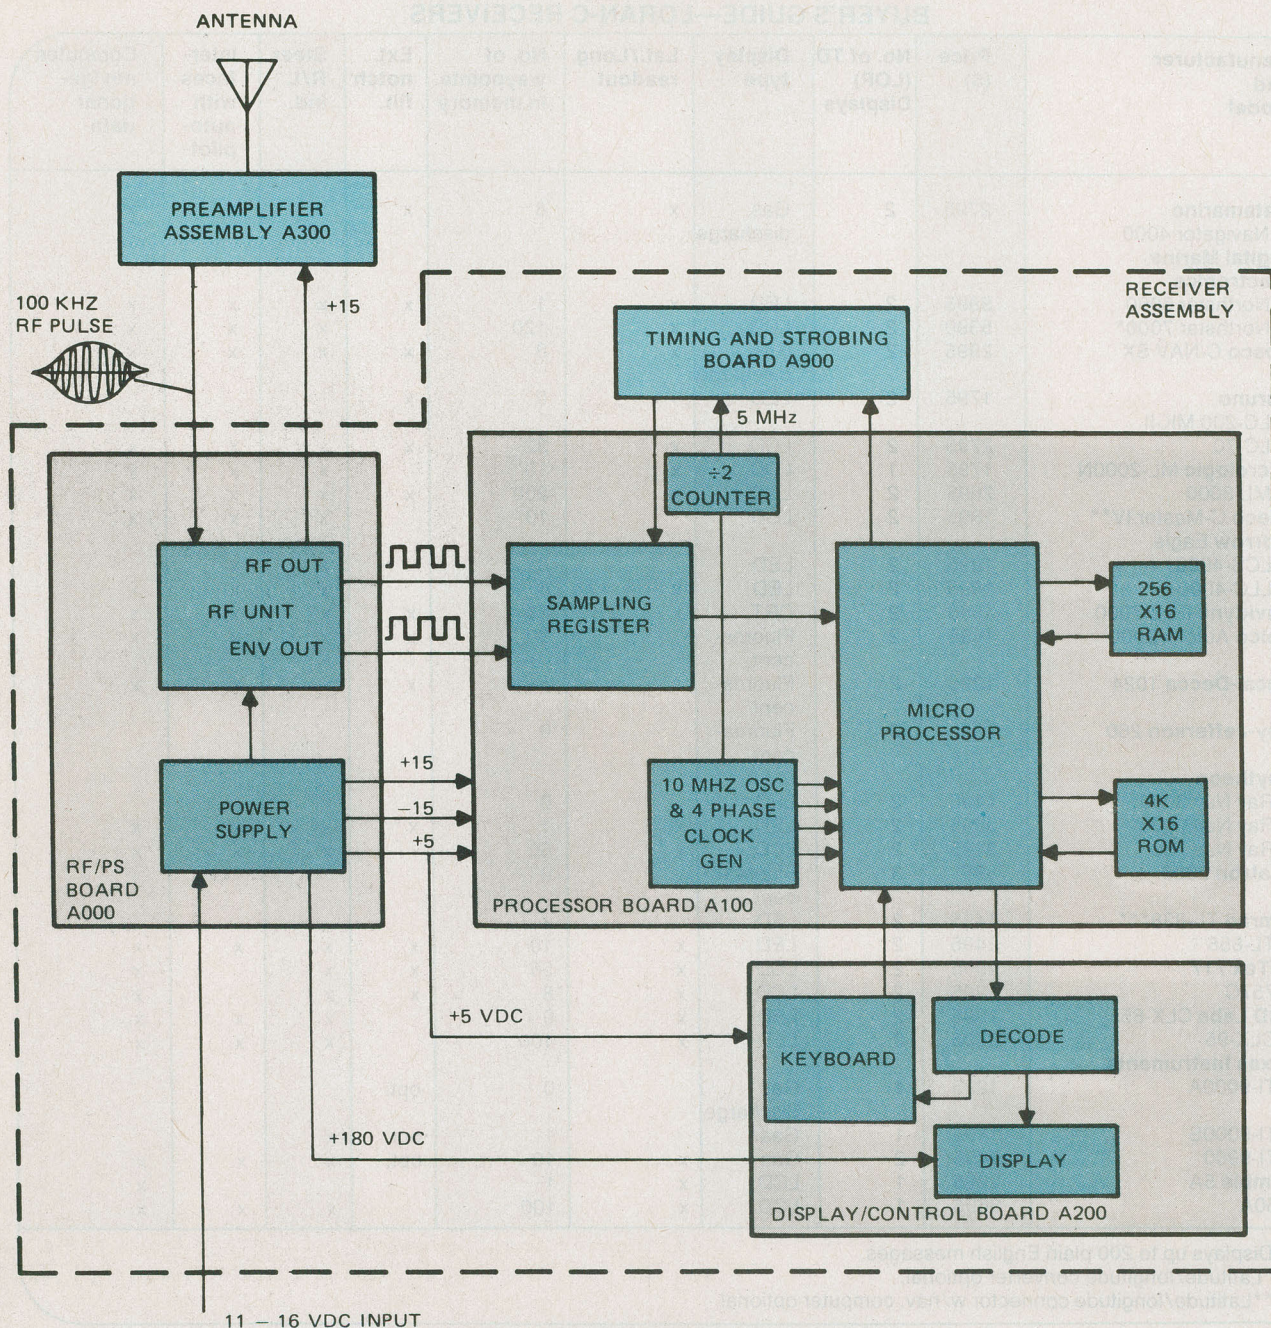

Notch filters are important—the more filters, the better. In Loran, electrical noise interference is your mortal enemy. A notch filter “notches out,” or reduces noise to a manageable level. While all Loran-C systems have internal notch filters, others have the additional flexibility of external units on the control panel. The latter are operator adjustable. The fixed filters are set specifically for the predominant interfering noise frequency in your region. The adjustable filters are to help compensate for noise interference when cruising in other areas. A note of warning when buying a model that features internal or fixed notch filters: Shy away from mail-order or other out-of-the-area pur-

chases, as the notch filters may not have been set for the interfering noise frequencies in your area. This can mean all the difference between having a set you can use and one you can’t. If you are planning long-distance cruising, you should consider getting adjustable front-panel notch filters. The additional external filters complement the noise suppression of the internal filters and give you some control over local noise conditions.

A remote or second station is not usually necessary on most boats, but models are available that will drive a remote display if you have the desire or need.

Direct readout conversion from TDs to latitude and longitude heads the list as

the most welcome and useful feat that some top-of-the-line equipment can accomplish. This feature is particularly helpful in fringe areas where Loran lines have not been fully plotted, or if a full set of charts with Loran-C LOP overlays are not on-hand.

Other new tricks that the more sophisticated models can perform include:

- Calculating the speed and course from your last position or waypoint.
- Estimating the time at a given speed to your next waypoint.
- Registering the amount of error (called cross-track error) in distance and direction while traveling between two waypoints.

BUYER'S GUIDE—LORAN-C RECEIVERS

Manufacturer and Model	Price (\$)	No. of TD (LOP) Displays	Display type	Lat./Long. readout	No. of waypoints in memory	Ext. notch filt.	Steer R/L ind.	Inter- faces with auto-pilot	Computes navigational data
Datamarine Navigator 4000	2795	2	Gas discharge	x	8	x	x	x	x
Digital Marine Electronics Northstar 6000	3995	2	LED	x	1	x	x	x	x
Northstar 7000*	5390	2	LCD	x	120		x	x	x
Epsco C-NAV SX	2995	2	Gas discharge	x	8	x	x	x	x
Furuno LC-200 MK-II	1795	2	LED		0	x			
LC-70	2795	2	LCD	x	32	x	x	x	x
Micrologic ML-2000N	1795	1	LCD	x	10		x	x	x
ML-3000	2695	2	LCD	x	200	x	x	x	x
Mieco C-Master IV**	1895	2	LCD		10		x	x	x
Morrow Eagle LCS-4000	1095	2	LED		8		x	x	
LLC-4000	1995	2	LED	x	5		x	x	x
Navidyne ESZ-7000	4950	2	CRT	x	25	x	x	x	x
Nelco Autofix 9000	1695	2	Fluorescent		30	x	x	x	x
Racal-Decca 1024	1295	2	Fluorescent		5	x	x	x	x
Ray-Jefferson 260	795	2	Fluorescent		0				
Raytheon Ray Nav 3000	1195	2	LED		0				
Ray Nav 6000	3995	2	LED	x	1	x	x	x	x
Ray Nav 750	2195	2	LCD	x	50		x	x	x
Seatron 2000	895	3	Fluorescent		0				
Simrad TL-838*** TL-856	1495	2	LED		x				
	2495	2	LED	x	10	x	x	x	x
Si-Tex 717 757C	2995	2	LCD	x	58	x	x		x
	1995	2	LCD	x	8	x	x		x
SRD Labs CLX-85 CLX-95	1995	2	LED	x	9		x	x	x
	2795	2	LED	x	100		x	x	x
Texas Instruments TI-9000A	1295	1	Gas discharge		0	opt.			
TI-9000S	1495	1	Gas		1	opt.	x		
TI-9900	2495	2	Gas	x	10	opt.	x	x	x
Trimble 5A 50A	2995	1	LCD	x	1				x
	3695	1	LCD	x	100		x	x	x

*Displays up to 200 plain English messages.

**Latitude/longitude converter optional.

***Latitude/longitude connector w/nav. computer optional.

MANUFACTURERS' ADDRESSES

Datamarine International, Inc.53 Portside Dr.
Pocasset, MA 02559**Digital Marine Electronics Corp.**(Northstar)
30 Sudbury Rd.
Acton, MA 01720**Epsco Marine**411 Providence Highway
Westwood, MA 02090**Furuno USA**271 Harbor Way
So. San Francisco, CA 94080**Micrologic**20801 Dearborn St.
Chatsworth, CA 91311**Mieco**109 Beaver Ct.
Cockeysville, MD 21030**Morrow**4740 Ridge Dr. N.E.
P.O. Box 7078
Salem, OR 97303**Navidyne Corp.**11824 Fishing Point Dr.
Newport News, VA 23606**Nautical Electronics Co. (Nelco)**7095 Milford Industrial Rd.
Baltimore, MD 21208**Racal Decca**P.O. Box G
#1 Commerce Blvd.
Palm Coast, FL 32037**Ray-Jefferson**Main & Cotton Streets
Philadelphia, PA 19127**Raytheon Company**676 Island Pond Rd.
Manchester, NH 03103**Seatron Marine Electronics**4312 Main St.
Philadelphia, PA 19127**Simrad, Inc.**2215 N.W. Market St.
Seattle, WA 98107**SiTex**St. Petersburg/Clearwater Airport
P.O. Box 6700
Clearwater, FL 33518**SRD Labs**381 McClincey Ln.
Campbell, CA 95008**Texas Instruments**P.O. Box 405, MS3438
2501 S. Highway 121
Lewisville, TX 75067**Trimble Navigation**1077 Independence Ave.
Mountain View, CA 94043

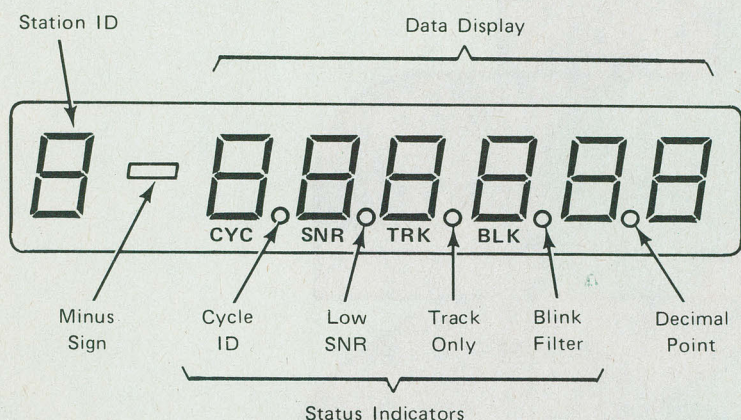
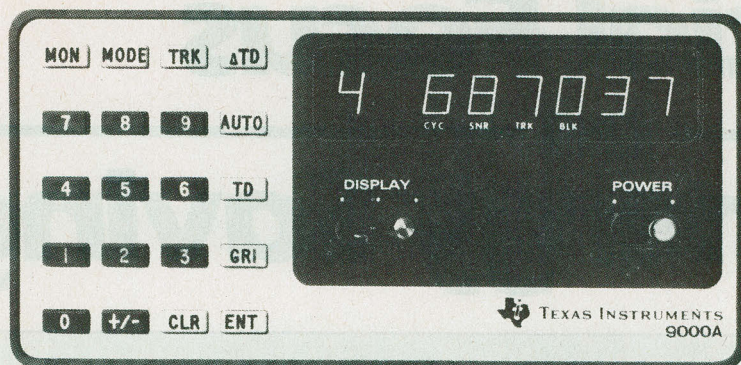


Photo at top shows location of controls and indicators on the TI-9000. The diagram below explains the various digital readouts.

- Automatically plotting Great Circle waypoints (navigators often prefer a Great Circle route on long trips).
- Automatic sequencing of several different waypoints.
- Keeping an "eye" on your boat when you are anchored and sounding an alarm if your boat drifts from its anchor.
- Keeping time on a precision 24-hour chronometer.
- Indicating elapsed time.

External accessories can extend the usefulness of many Loran receivers, and the list of options seems to be limited only by the imagination. For example, a remote analog steer-right/steer-left meter is available on some models. One company's remote-course deviation indicator not only indicates whether or not you are on course, but will also trigger an audible signal or light when you get within 0.5 nautical mile of your destination. Data-marine's small Course Deviation Indicator is designed into a round, waterproof, bulkhead-mounted case that permits use where it may be subjected to sea spray and waves.

One of the most interesting in the list of Loran-C add-ons is a chart recorder. It uses output data from some Loran receivers to drive a plotter that charts a permanent record of where you have been sailing. Its real value becomes obvious when you use it to literally steer your

boat down a pre-drawn line on a marine chart. Other manufacturers use a CRT display instead of chart paper to produce an electronic video plotter. Data output from any Loran model can be used to turn your receiver into an electronic First Mate that can issue commands to your auto-pilot.

If the idea of your pilot "talking" to your auto-pilot makes you feel left out, be not jealous, O Brave Mariner. Texas Instruments has an option to lend vocal cords to its Model TI-9900. Using a speech synthesizer, the TI-9930 audibly reports your position periodically, your elapsed time from system turn-on, the speed, range and bearing to your next waypoint, the time to go to next waypoint, cross-track error, the signal-processing status of the Loran, what waypoints have been stored in its memory, and any Loran transmitter problems. It will also caution you about marginal signal reception, and warn you when prompt action must be taken.

Finally, the Northstar 7000 Loran, from Digital Marine Electronics, sports a real sense of humor in its memory bank. Instead of diplomatically calling to the attention of the operator that he or she has made an error, the 7000 display reads out "Baloney" or "No Way Jose." You, of course, can make the receiver walk the plank.

SAVE!

MONEY • TIME • FREIGHT

QUALITY STEREO EQUIPMENT AT LOWEST PRICES.

YOUR REQUEST FOR QUOTATION RETURNED SAME DAY.

FACTORY SEALED CARTONS—GUARANTEED AND INSURED.

SAVE ON NAME BRANDS LIKE:

PIONEER	JVC
KENWOOD	TEAC
MARANTZ	SANSUI
TECHNICS	SONY

AND MORE THAN 50 OTHERS
BUY THE MODERN WAY
BY MAIL—FROM

illinois audio

BANK CARDS ACCEPTED

12 East Delaware

Chicago, Illinois 60611

312-664-0020


800-621-8042

CIRCLE NO. 24 ON FREE INFORMATION CARD

Put Professional Knowledge and a COLLEGE DEGREE

in your Electronics Career through

HOME STUDY

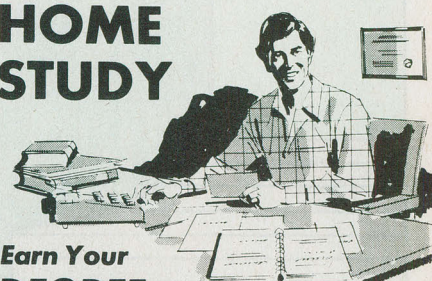

Earn Your DEGREE


No commuting to class. Study at your own pace, while continuing your present job. Learn from easy-to-understand lessons, with help from your home-study instructors whenever you need it.

In the Grantham electronics program, you first earn your A.S.E.T. degree, and then your B.S.E.T. These degrees are accredited by the Accrediting Commission of the National Home Study Council.

Our free bulletin gives full details of the home-study program, the degrees awarded, and the requirements for each degree. Write for Bulletin ET-82.

Grantham College of Engineering
2500 So. LaCienega Blvd.
Los Angeles, California 90034

Special Focus on Home Energy Saving

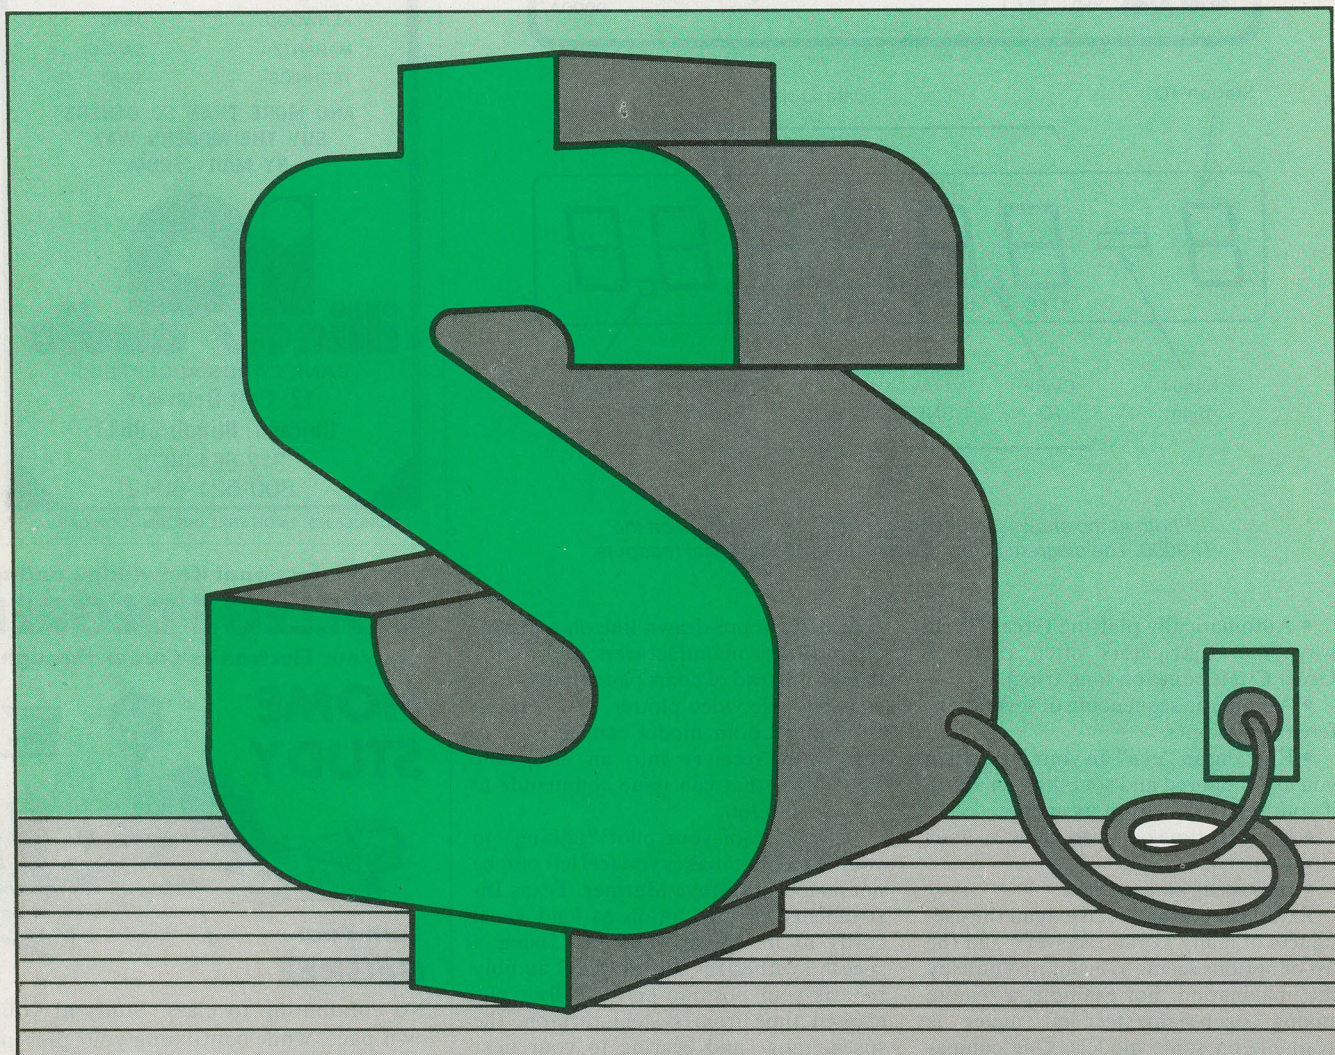

New "Vacation" Thermostat, Set to Just Above Freezing, Saves Heating Costs

by Tom Fox

HAVE you ever planned to take a winter vacation or a weekend ski trip and wondered what to do about the wasted heat in your home while it is vacant? Obviously, you cannot shut off your furnace because a freeze might

cause your waterpipe to burst. So you set your thermostat to its lowest point, typically 54°F, as any energy-conscious person would. But you still waste energy since water doesn't freeze until the temperature reaches 32°F. Here's how

to lower your thermostat further, to just above freezing, and perhaps save twice as much on your energy bill as compared to the 54°F setting. (See the Table at the end of this article for comparative savings.)

A True Energy-Saving Thermostat.

A new temperature-sensing reed switch is the basis for design of the energy-saving thermostat. It can be reliably preset to a temperature between 35° and 40°F and requires only the simplest type of support circuitry. Moreover, no calibration whatsoever is needed.

The first step in wiring the energy-

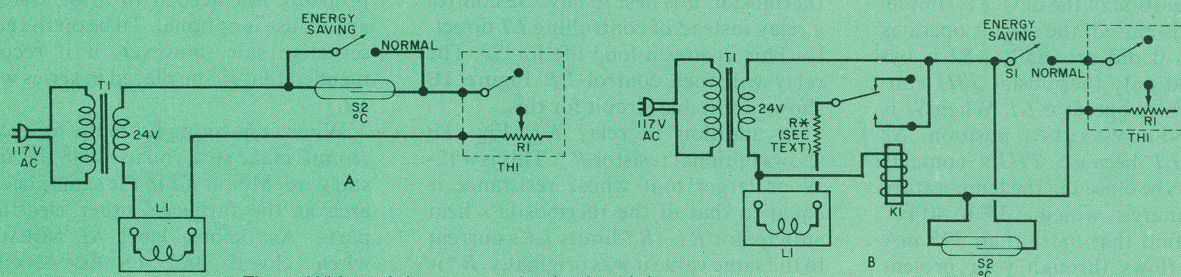


Fig. 1. Wiring of thermostat circuit when it is less than 375 mA (A) and more than 375 mA (B).

PARTS LIST (Fig. 1)

K1—24-V ac (75 ohms or more) relay, 2-A normally open contacts (Potter & Brumfield KA5AY-24VAC or Guardian 1310-4C-24VAC or equivalent)
 R*—12-W (or more) resistor (see text)
 S1—Spst switch (dpdt for 3-wire heating control system)(see text)
 S2—Freeze sensor (MCI TS-5B19)

Misc.—Thermostat wire, solder, labels, screws, etc.

Note: The following is available from Magicland Electronics, 4380 S. Gordon, Fremont, MI 49412: MCI TS-5B19 freeze sensor (trip point guaranteed by MCI to be between 1°

and 7°C) at \$6.25 each, postpaid, via first class mail. Also available are the TS-5B19A (trip point 38°F ±2°F), TS-5B19L (trip point 35°F ±2°F), and TS-5B19H (trip point 42°F ±2°F) at \$9.85 each, postpaid.

saving thermostat into your heating system is to find out how much current flows through your present thermostat. You can look up this information, but it's preferable to take measurements.

To measure the current, you will need an ac milliammeter that can read to 1000 mA. Disconnect the two wires from your thermostat and connect the meter's leads to these wires. Make a note of the current. If it is less than 375 mA, only a spst switch and a tempera-


ture-sensing reed switch are required to make a complete energy-saving system.

Now measure the resistance of your thermostat's heat anticipator. With the wires to the thermostat disconnected, set the thermostat as high as it will go, making sure the contacts close. Connect an ohmmeter across the thermostat's terminals and make a note of the measured resistance. This resistance we will call R1.

Figure 1A shows how to add an ener-

gy-saving thermostat to a furnace that requires less than 375 mA of control current. Be sure to use #18 thermostat wire when making connections. Locate switch S1 near your present thermostat and label it NORMAL when it is closed and ENERGY-SAVING when open. The temperature-sensing reed switch, S2, can be mounted either next to the old thermostat or in an area of the house where freezing could be especially damaging while you're away.

TYPICAL FURNACE-CONTROL CIRCUITRY

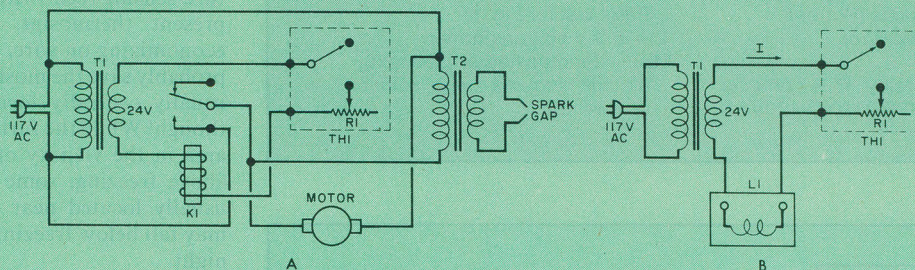

Most, but not all, oil and gas furnaces use low-voltage (24 V ac) thermostat control systems. Figure A shows a simplified wiring diagram of a typical oil-fired furnace. T1 is a 24-V transformer and TH1 is a low-voltage thermostat with an adjustable heat anticipator (resistance R1). Relay K1 has normally open contacts and a 24-V ac coil. The oil-pump motor and ignition transformer T2 lead to the spark gap. (Numerous safety-related circuits and com-

ponents of the furnace are not shown.)

The operation of a typical oil-fired furnace is simple. When the temperature of the thermostat drops below its setting, the contacts close and 24 V ac is applied to K1's coil. With its coil energized, K1 pulls its contacts closed and line voltage is applied to the motor and T2. The motor M1 then starts pumping oil, while T2 steps up the voltage to between 10,000 and 12,000 V. The high voltage from T2's secondary

causes a spark and the oil ignites. Not mentioned are the many safety-related circuits such as flame detector, oil-over-flow detector, overheat controls, etc.

A grossly oversimplified wiring diagram that is typical of either a gas or oil furnace is shown in Fig. B. Here L1 is either a 24-V relay or control-valve operator. T1 and TH1 are exactly the same as before. (For simplicity, the furnaces's other electrical parts are not shown.)

Home Energy Saving

The operation of the device is simple. When *S1* is closed, the circuit operates exactly as it did originally—*S2* is bypassed and only thermostat *TH1* controls the valve operator *L1*. When *S1* is in the ENERGY-SAVING position, *S2* controls *L1* because *TH1*'s contacts will always be closed in the temperature range of interest, which is 35° to 40°F.

If you find that more than 375 mA normally flows through your present

thermostat, it is best to have *S2* control a relay instead of controlling *L1* directly. This insures a long life for *S2*. The relay will then control *L1*. Figure 1B shows a suitable circuit for this.

In addition to relay *K1*, Fig. 1B shows optional resistor *R**. This is a 12-W or larger unit whose resistance is equal to that of the thermostat's heat anticipator *R1*. (*R** limits *L1*'s current to the same value it was originally. *R** is

probably not needed in most systems and its use is optional. To be on the conservative side, however, it is recommended that *R** be placed in series with *L1*.)

When connecting *K1* to the furnace's circuit, make sure you use #18 thermostat wire. Mount *K1* in the same general area as the furnace's other electrical parts. As before, label *S1* NORMAL when closed and ENERGY-SAVING when open. Relay *K1* can be any type having a 24-V ac coil that draws less than 375 mA and has normally open contacts with a 2-A or higher rating.

Now, with *S1* in the NORMAL position, only *TH1* controls *K1*. The reason is that *S2*'s contacts are only closed when the temperature approaches freezing—which we assume never happens when *S1* is in the NORMAL position (except for a power outage or furnace failure). With *S1* in the ENERGY-SAVING position, *TH1* is disconnected from the circuit and only *S2* controls *K1*. When *K1*'s coil is energized, its contacts are pulled closed, 24 V is applied to *L1* and the furnace starts up.

The wiring diagrams shown in Fig. 1 pertain to 2-wire heating thermostat circuits as well as most newer types of heating/cooling thermostat circuits with 3, 4 or 5 wires. However, if you have a 3-wire, 24-V ac heating thermostat (rare today) that controls less than 375 mA, you can't use either circuit. But, don't despair! You can easily construct an energy-saving thermostat. See Fig. 2. The only significant change from Fig. 1A is that a dpdt switch is used instead of the spst type.

The best place to mount the temperature-sensing reed switch is close to your present thermostat. In addition to economizing on wire, this location will probably save the most energy since it is usually centrally located. Be careful, though! While the furnace will keep the area in the vicinity of the sensor well above freezing, some critical regions, usually located near an outside wall, may fall below freezing on a bitter cold night.

To be on the safe side, locate *S2* in a critical area. A good place would be near a water pipe that has caused trouble in the past. Actually, you can place as many sensors around the house as you like. By doing this, the circuit will continually monitor all areas that can be damaged by freezing. The furnace will go on whenever one sensor gets cold enough. (When wiring additional sensors into the circuit, be sure to connect them in parallel.)

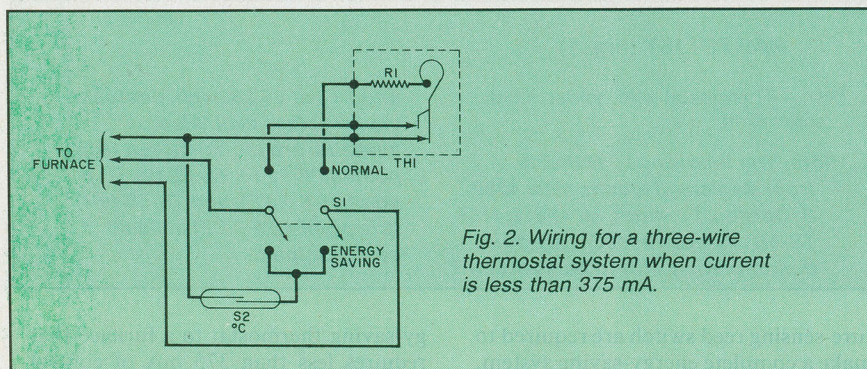


Fig. 2. Wiring for a three-wire thermostat system when current is less than 375 mA.

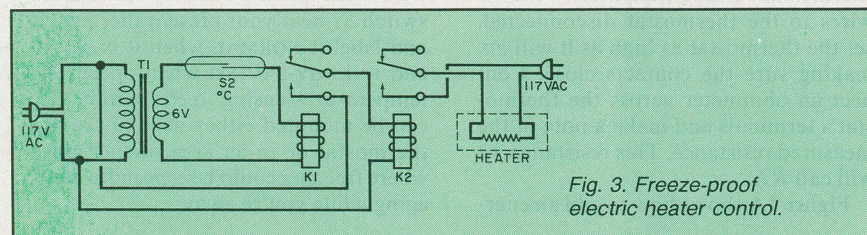


Fig. 3. Freeze-proof electric heater control.

PARTS LIST (Fig. 3)

K1—6-V ac (12 ohms or more) relay, 5-A normally open contacts (Potter & Brumfield KA5AY-6VAC or equivalent)
K2—120-V ac power relay, 15-A contacts (Potter & Brumfield PRD1AYO-120VAC or equivalent)

S2—Freeze sensor (MCI TS-5B19. See Parts List for Fig. 1)
T1—6.3-V ac transformer
Misc.—Electric heater (see text), electric plug, #14 wire, solder screws, etc.

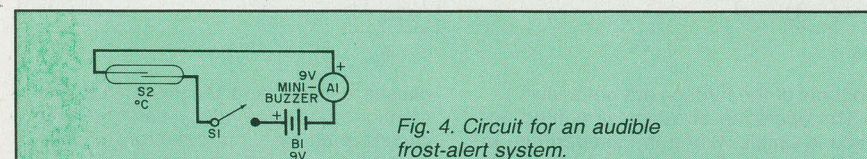



Fig. 4. Circuit for an audible frost-alert system.

PARTS LIST (Fig. 4)

A1—9-V solid-state mini-buzzer (Sonalert)
B1—9-V battery

S1—Spst switch (optional)
S2—Freeze sensor (MCI TS-5B19L. See Parts List for Fig. 1)

HOW A TEMPERATURE-SENSING REED SWITCH WORKS

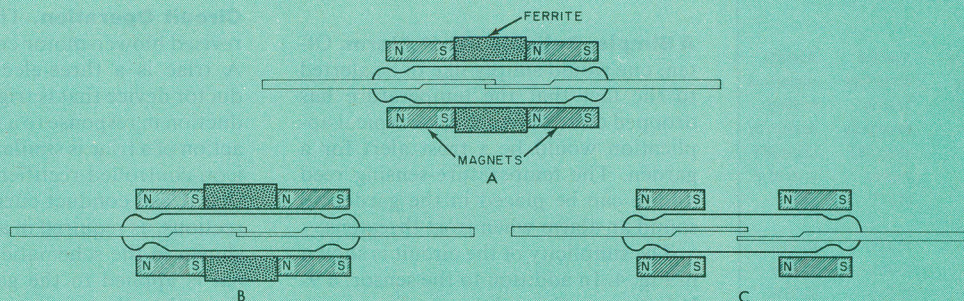

A temperature-sensing reed switch consists of a rhodium-contact reed switch hermetically sealed in glass, two permanent magnets that surround the glass, and a ferrite ring sandwiched between the magnets (Fig. A). The switch depends on the interaction of the magnets and the ferrite for its operation.

The ferrite ring is the temperature-sensing component of the device. It is magnetic below its *Curie temperature* but non-magnetic above it. (The Curie temperature of a ferrite material is the temperature above which the ferrite's ability to conduct flux is severely reduced.) To get some idea of how temperature affects the sensor, refer to Fig. B. Here the temperature is below the ferrite's Curie temperature and thus the ferrite is magnetic. Notice how the magnetic flux lines travel easily through the ferrite. Since the ferrite is magnetic, the magnetic field in the area of the contacts is sufficient in strength to keep them closed.

Now assume the sensor is heated so that the ferrite exceeds its Curie temperature (Fig. C). The warmed-up ferrite is now nonmagnetic and its reluctance increases dramatically. Because of its high reluctance, the ferrite cannot easily conduct lines of flux. This results in a reduction in magnetic field strength near the reed switch's contacts. Since the magnetic force holding the contacts closed has now weakened substantially, the contacts open. (Note that since the ferrite is now nonmagnetic, it is eliminated from the drawing.) When the ferrite cools to below its Curie temperature, it becomes magnetic again. The magnetic field increases, so the contacts close once again.

The freeze sensor we are particularly interested in is the TS-5B19 manufactured by Midwest Components, Inc. (Muskegon, MI). It is a temperature-sensing reed

switch with ferrite material that has a Curie

temperature of approximately 39°F. These sensors come in metal or plastic packages. The metal-packaged sensor can withstand temperatures as high as 400°C (750°F), while the less-expensive plastic-packaged model is limited to use with tem-


peratures below 125°C (257°F). Though the switches are used primarily as freeze sensors here, the ferrite material can have a wide range of Curie temperatures from -10°C to 250°C.

Characteristics of the TS-5B19. Most factory-run TS-5B19's have a trip point near 39°F. MCI guarantees that all TS-5B19's will close their contacts before the temperature drops to 1°C (33.8°F) and will not close before 7°C (44.6°F). Note that all trip points assume falling temperatures. The rising temperature trip point is several degrees higher.


The TS-5B19 series of sensors have contacts rated at 10 W or 12 VA maximum. Maximum voltage is 100 V dc or 120 V ac. The contacts can carry up to 1 A but have only a ½-A "make" rating. The maximum recommended operating temperature is 257°F.

All temperature-sensing reed switches are magnetic in nature. Because of this, some precaution should be taken when locating most kinds, including the freeze sensor. The switches should be kept at least ½" from any iron or steel and at least ¾" from any magnetic-field producing device (i.e. magnet, transformer, motor, solenoid, similar sensors, etc.). It is also recommended that the leads not be cut. However, bending is okay. If these precautions aren't followed, the trip point will be changed.

The sensors are completely waterproof. Additionally, gasoline, motor oil, calcium chloride, or Freon has no effect on them. However, alcohol, strong sulfuric acid, and some other chemicals will destroy plastic-packaged models.

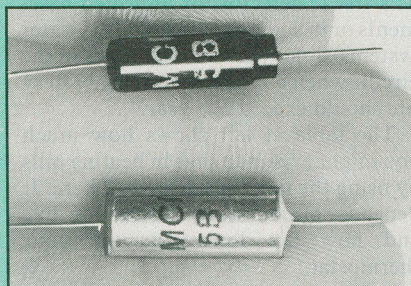

Temperature-sensing reed switches.

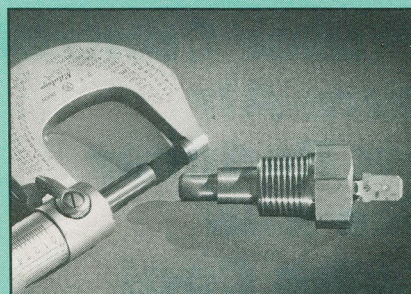

Metal-packaged freeze sensor.

switch with ferrite material that has a Curie temperature of approximately 39°F. These sensors come in metal or plastic packages. The metal-packaged sensor can withstand temperatures as high as 400°C (750°F), while the less-expensive plastic-packaged model is limited to use with tem-

A Freeze-Proof Room. Some people have a small storage building or small room in an unheated garage that is unsuitable for storing items that must be kept from freezing. Also, some utility rooms or even half-baths are left unheated to economize. On a bitter cold night, this can lead to frozen and cracked pipes and other problems. If

the area is sufficiently insulated and relatively small, it can be kept freeze-proof quite economically by using a 120-V, U.L. electric heater in conjunction with a control like the one shown in Fig. 3. This control is also suitable for keeping a small greenhouse frost-free.

In Fig. 3, *T1* is an inexpensive 6.3-V ac filament transformer typically avail-

able from surplus electronics stores. Relay *K1* has normally open contacts rated at 5 A and its coil is rated at 6 V, 500 mA ac (or less). Relay *K2* can be any 120-V ac power relay that has contacts rated at 15 A or more. Be sure to use #14 U.L. wire in this circuit. This type of circuit, with some modifications (such as replacing *K2* with a heavy-

ENERGY SAVING AROUND THE COUNTRY

	Average heating degree days	Average wintertime heating savings by using 38°F instead of 54°F	Average wintertime heating savings by using 38°F instead of 68°F
NORTHEAST			
Boston	6000	40-45%	80-90%
Cleveland	6154	40-45%	80-90%
New York	5000	45-50%	85-95%
NORTH CENTRAL			
Chicago	6300	40-45%	80-85%
Detroit	6325	40-45%	80-85%
Minneapolis	8310	35-40%	60-65%
MIDSOUTH			
Louisville	4640	45-50%	85-95%
St. Louis	4750	45-50%	90-95%
Washington, DC	4211	45-55%	90-95%
SOUTH			
Atlanta	3095	50-100%	90-100%
Dallas	2290	55-100%	90-100%
Memphis	3227	45-95%	90-95%
WEST			
Albuquerque	4292	45-50%	90-95%
Anchorage	10,911	30-35%	50-60%
Salt Lake City	5983	40-45%	80-90%
Seattle	5185	45-100%	85-100%
Spokane	6835	40-45%	80-85%

duty relay that has dpst contacts), can be used to control a 240-V ac electric heater.

A Simple, Reliable Frost Alarm. Often, one would simply like to be alerted to the fact that the temperature has dropped close to freezing. A typical application would be a frost alert for a garden. The temperature-sensing reed switch can be placed in the garden to sound an alarm when frost threatens.

The simplicity of the circuit is shown in Fig. 4. In addition to the sensor, a 9-V battery and a solid-state buzzer are all that are required. Switch *S1* is optional. Locate the sensor as close as possible to the plants you want to protect. The sensor can simply be set on the ground, if desired.

Another possible use of this circuit is as a freeze detector for unheated basements or in some simple solar hot-water systems. Since current only flows in the circuit when a freeze threatens, battery life should exceed one year.

The table at left shows how much you might expect to save in heating bills by using the methods described here. It depends, of course, on where you live and how far down you set your thermostat. ◇

tor control and continuous air circulation to your warm-air heating system.

Circuit Operation. The heart of the revised blower-motor control is a triac. A triac is a three-electrode semiconductor device that is triggered into conduction in response to a gate signal. The action of a triac is similar to that of a silicon-controlled rectifier (SCR), except that it can conduct current in both directions, as required in an ac circuit. As shown in the schematic (Fig. 1), a signal is applied to the gate of the triac through a thermistor and diac *D2*. (A diac is a solid-state trigger device that has a breakdown voltage similar to that of a zener diode, except that it works in either direction.)

An RC time constant composed of thermistor *TCR1* and capacitor *C4* prevents the triac from delivering power to the motor for part of each half cycle of the 117-V ac waveform. When plenum temperature is low, *TCR1* has a high resistance. This lengthens the time required for the voltage to increase sufficiently to trigger the triac into conduction through *D2*. When plenum temperature is high, the triac is triggered into conduction earlier in the cycle, resulting in more power being delivered to the motor and higher operating speed.


A second trigger circuit, composed of *R2*, *C3*, and diac *D1*, is used to ensure that the motor operates at a minimum speed regardless of the temperature (and resistance) of the thermistor. A minimum blower speed is necessary since the furnace cannot operate with a blower turning too slow or not at all.

For heating and cooling systems, an optional switch has been included in the circuit so that the proportional motor control can be overridden during the cooling season. The switch provides sufficient gate signal to the triac to ensure maximum blower-motor speed.

Components *R1*, *C1*, *C2*, and *L1* are included in the circuit to smooth the steep wavefronts generated by the triac and help reduce radio-frequency interference, which is inherently produced in switching circuits such as this.

Construction. The circuit can be constructed on a small printed-circuit board measuring about 3" by 3". The only external components are the thermistor and optional switch *S1*. Figure 2 shows a full-size foil pattern, and Fig. 3 shows the parts layout.

Since this circuit is powered directly from the ac power line, all capacitors

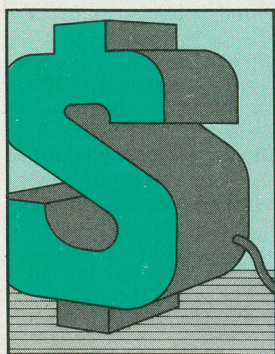

Triac Motor Control for Warm-Air Systems Reduces Fuel Use and Eliminates Cool Spots

by Anthony Caristi

DOES the blower motor of your warm-air heating system have just one speed? If so, your furnace is not operating at optimum efficiency. In a warm-air heating system, the air should move through the heat exchanger of the furnace at a velocity that continuously varies with the temperature of the plenum.

Another shortcoming of your warm-air heating system as it is designed might be that the blower motor shuts off at times. Since a warm-air system

has no inertia, you may feel a chill when the blower stops even though the room temperature is high enough to trip the thermostat and turn the burner off. Nowadays, warm-air systems are designed with a "continuous air circulation" feature. This means that the burner cycles on and off frequently, keeping the plenum warm enough to maintain continuous blower operation.

With the inexpensive and easy-to-build circuit described here, you can add both a variable-speed blower-mo-

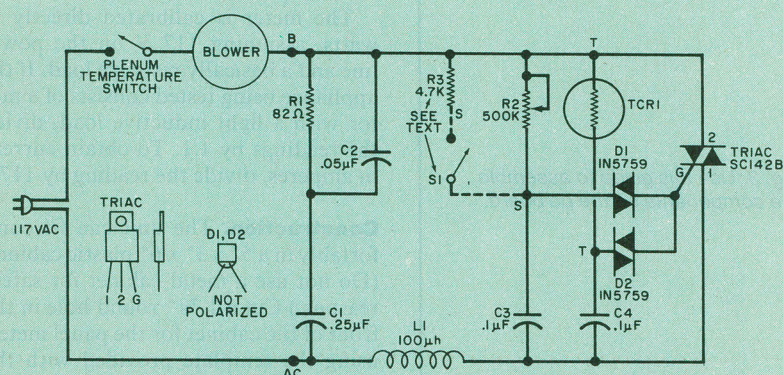


Fig. 1. The blower-motor control circuit is based on the use of a triac.

PARTS LIST

C1—0.25- μ F, 200-V tubular capacitor
 C2—0.05- μ F, 200-V tubular capacitor
 C3, C4—0.1- μ F, 200-V tubular or disc capacitor
 D1, D2—1N5758 diac or equivalent
 L1—100- μ H, 5-A choke (see text)
 R1—82-ohm, 1/4-W, 10% composition resistor
 R2—500-kilohm, pc-mount potentiometer
 R3—4.7-kilohm, 1/4-W, 10% composition resistor

S1—Spst switch
 TCR1—200-kilohm at 25°C thermistor (Keystone Part No. RL1004-104550-155-D1 or equivalent)
 Triac—SC142B or similar
Note: The following are available from Anthony Caristi, 69 White Pond Rd., Waldwick, NJ 07463: pc board at \$3.50; triac at \$3.50; diacs at \$2.00 each; thermistor at \$5.00. Please include \$0.50 for postage.

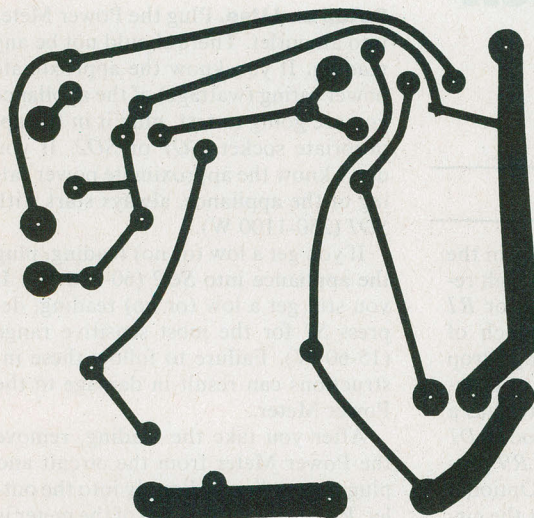


Fig. 2. Actual-size foil pattern for the printed circuit board.

must have at least a 200-V rating. Do not use low-voltage types designed for solid-state circuits.

The blower motor will draw several amperes through the triac during operation, which will result in some power being dissipated in the device. It is rec-

ommended that a small heat sink be used to help keep the triac from overheating. A simple heatsink can be constructed by bending a 1" by 3" piece of sheet aluminum into a U shape. Drill a hole through the center of the aluminum and mount the triac and heatsink

to the printed circuit board with a #4 machine screw and nut. Use heat sink compound between the mounting tab of the triac and the heat sink for best heat conduction. Be sure to keep the heat sink completely insulated from any metal part of the furnace when installing the pc board.

Inductor *L1* can be easily constructed by winding about 15 turns of #20 enamel wire on a wood or plastic 3/8"-diameter form. The inductance of *L1* is not critical, but do not use wire of smaller gauge since *L1* must be able to carry the full load current of the blower motor without overheating. The same caution applies to the foil pattern which is shown in Fig. 2. Be sure to keep the conductive paths to the triac wide (as illustrated).

The pc board can be mounted inside the furnace where the other electrical controls are located. The schematic diagram and printed-circuit layout are marked with the letters AC, B, S, and T, which will help you identify connections to the external parts of the circuit.

Run a pair of wires for the thermistor from the "T" terminals on the pc board up to a convenient place on the plenum where the thermistor can readily sense temperature changes. Drill a small hole in the plenum sheet metal to insert the thermistor so that the air flow will pass over it. Be sure to insulate the thermistor and its connections so that no possible short-circuit to the metal parts of the furnace can occur.

If this should happen, the pc board or its components could be destroyed. Do not cover the head of the thermistor with insulation, since this will tend to make the component less sensitive to the changing temperature of the plenum.

Checkout and Adjustment. Before applying power to the furnace, check all connections to make sure the wiring is correct. To set the minimum blower speed, temporarily turn on the furnace by manually adjusting the plenum temperature switch or connecting a jumper across the switch to complete the circuit. (This must be done while the plenum is cool. If necessary, run the blower with the gas or oil burner off until the plenum is cool to the touch.) Then adjust *R2* for the minimum desired blower speed.

Now reset the plenum switch back to its original position (which should be somewhere between 90° and 110° F), or remove the temporary jumper. Set the room thermostat so that it calls for

Home Energy Saving


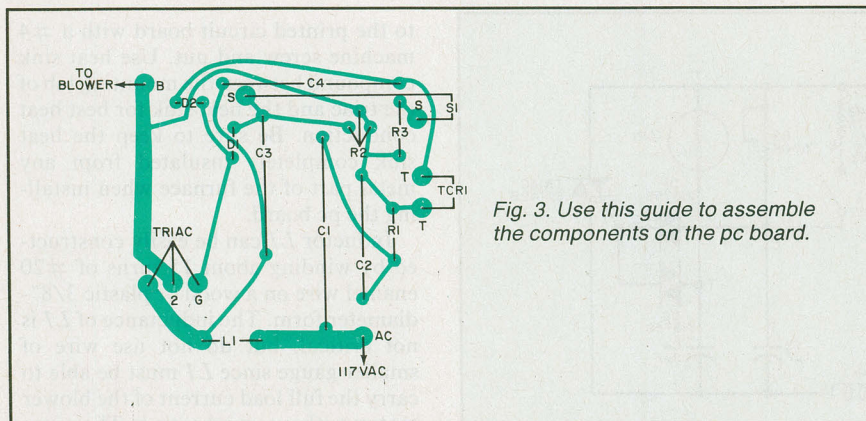


Fig. 3. Use this guide to assemble the components on the pc board.

heat. Now, as the furnace heats up and the blower comes on, the blower speed will automatically increase as the plenum temperature rises. Conversely, when the thermostat shuts the burner off, the blower speed will decrease as the plenum cools.

Ideally, the blower will continue to operate at minimum speed until the thermostat turns the burner on again. This continuous air circulation will greatly enhance the comfort level of your home, and will help you conserve heating fuel too. ◇

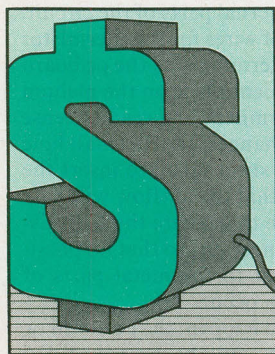

Power Meter Keeps Tabs of How Much Electricity an Appliance Uses

by Cass Lewart

WITH electrical and electronic products abounding in homes and electric power costs so high, it would be interesting and valuable to know how much power each one consumes. The inexpensive power meter described here enables you to accurately determine ac electric consumption for appliances rated between 15 and 1100 watts. It can also be used for diagnostic work when repairing appliances.

Circuit Operation. The current in the appliance under test passes through resistors *R1* and *R5*, *R6* and *R7*, or *R1* through *R5*, depending on which of three ranges is selected. A voltage drop of up to 2 V ac across the resistors operates panel meter *M1*. (The meter has a built-in rectifier.) Two zener diodes, *D1* and *D2*, and resistors *R8* and *R9* protect the meter from overload. Optional fuses *F1* and *F2* further protect the cir-

cuit components from overloads.

The meter is calibrated directly in watts, assuming 117 V on the power line and a basically resistive load. If the appliance being tested consists of a motor with a light inductive load, divide the readings by 1.1. To obtain current in amperes, divide the reading by 117.

Construction. The unit can fit comfortably in a 5" x 3" x 6" plastic cabinet. (Do not use a metal cabinet for safety reasons.) Cut a 1 7/8" round hole in the front of the cabinet for the panel meter, using the template provided with the meter. (An easy way to cut this hole is with a nibbler tool.) Then cut another hole in the front for switch *S1* and three holes in the back of the cabinet for sockets *SO1*, *SO2*, and the ac power cable. Put a rubber grommet into the hole to protect the cable insulation. Then install two tie-down terminal strips. Keep all resistors away from cabinet walls as the resistors may get hot.

The next step is to pry off the front cover of the panel meter and replace the dial. Remove the two Phillips screws and dial, being careful not to damage the pointer. Cut the new dial from Fig. 1 and glue it over the old dial. Then reassemble the panel meter. Wire the resistors and zener diodes as shown in Fig. 2.


Setup and Use. Plug the Power Meter into an outlet. There should not be any reading. If you know the approximate power rating (wattage) of the appliance you are going to test, plug it in the appropriate socket, *SO1* or *SO2*. If you don't know the approximate power rating of the appliance, always start with *SO1* (250-1100 W).

If you get a low (or no) reading, plug the appliance into *SO2* (60-250 W). If you still get a low (or no) reading, depress *S1* for the most sensitive range (15-60 W). Failure to follow these instructions can result in damage to the Power Meter.

After you take the reading, remove the Power Meter from the circuit and plug the appliance directly into the outlet. Remember, the range of the meter is approximately 15 to 1100 W. It should not be used with appliances such as air conditioners, large electric stoves, or dryers that draw more than the maximum current.

Estimating Electricity Cost. You can estimate how much it costs to run a particular appliance like a tube-type color TV set by using the following

Fig. 1. Cut out this dial and glue it on the old meter.

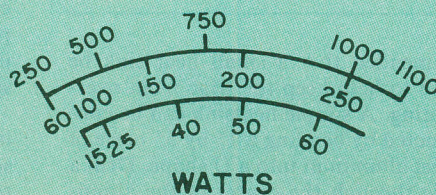

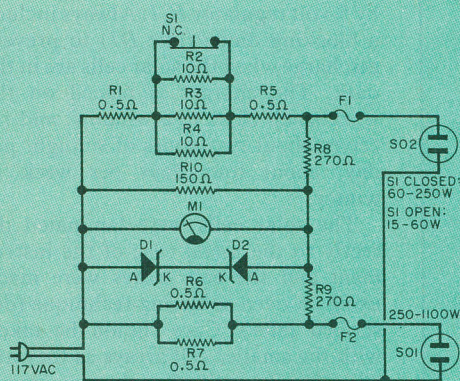


Fig. 2. The range of the meter is determined by which socket is used and whether S1 is open or closed. The zener diodes and R8 and R9 protect the meter.

PARTS LIST


D1,D2—4-V zener diode
F1—5-A fuse (optional)
F2—15-A fuse (optional)
M1—VU meter (Calectro D1-930 or equivalent, see text)
R1,R5,R6,R7—0.5-ohm, 10-W resistor
R2,R3,R4—10-ohm, ½-W resistor

R8,R9—270-ohm, ½-W resistor
R10—150-ohm, ½-W resistor
S1—Spst normally closed, pushbutton switch, 3-A rating or better
SO1,SO2—117-V jack
Misc.—Hardware, plastic cabinet, wire solder, etc.

method. First determine how much electricity the TV set uses with the Power Meter (approximately 350 W). Next, check the cost of electricity in your area (in a typical residential area like northern New Jersey, cost is currently \$0.09 per kilowatt-hour). Then

estimate the time of operation. If the set were used for six hours each day, the cost of electricity could be calculated as shown here.

$$\begin{aligned} &350 \text{ W} \times 6 \text{ hr/day} \\ &\times 30 \text{ days/mo} \times \$0.09/1000 \text{ W-hr} \\ &= \$5.67/\text{mo.} \end{aligned}$$

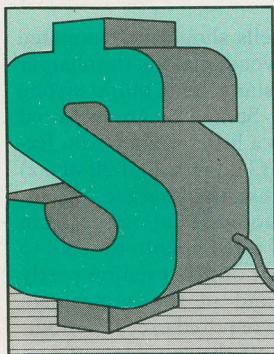

How to Use Solar Energy to Recharge Your Batteries

by Ed Karns

THE prices of photovoltaic cells, commonly called solar cells, are dropping to the point where experimenters can start exploring solar-power applications.

Since solar cells generate power only when illuminated, they are popularly used to charge batteries. Such solar-

powered battery chargers are easy to make. You can get started quickly in this energy-related area with the four simple designs presented here. Although some of the designs illustrated were developed for use with radio-controlled model airplanes, they can be used for many other solar chargers.

Basic Power. The circuit shown in Fig. 1 was used to charge a nominal 9.6-volt battery to power a radio-controlled (RC) transmitter. The "rule-of-thumb" is that the number of solar cells to use is equal to the required battery voltage divided by 0.4. (The typical voltage that most solar cells generate in sunlight is 0.45 V, with 0.4 chosen here to provide a design cushion.) The current requirement of the cells should be sufficient to charge the battery. Thus, in this application, 24 cells were used (9.6/0.4).

When the voltage across the solar array shown is greater than the battery voltage, diode D1 is forward-biased, allowing current to flow to the battery. However, if the battery voltage is higher than that of the solar array (due to a passing cloud, etc.), diode D1 is reverse-biased and acts as an open switch to protect the array. Since the voltage drop across D1 is 0.7 V (typical for a silicon diode), it is less than 10% of the total voltage and its effect can be ignored.


The current capacity of a solar array is determined by the required load current, the amount of time the load is used, and the length of time the array is exposed to light.

Since a solar cell delivers its maximum power in bright sunlight, the effects of cloudy or hazy days must be compensated for. Since the charging rate for the battery used in Fig. 1 was about 90 mA, the solar array was designed to deliver more current to account for the dark intervals. This is why the author elected to use 150-mA solar cells.

Depending on the brightness of the sunlight, the solar array can deliver 12 or more volts (at reduced current). Since a NiCd battery "likes" to be charged to at least 1.35 V per cell, and there are eight cells in the 9.6-volt battery used, the total voltage applied to the battery should be limited to 10.8 volts (1.35 × 8). Zener diode D3 was selected to keep the supplied voltage to 11 volts (the closest zener to 10.8 volts). The voltage drop across silicon diode D1 is the same as that across D2, so that the voltage drop across D3 is equal to the maximum voltage across the battery. Since the load may not always be plugged into the solar array, zener D3 should be capable of dissipating all the array power without destructing. This is why a 5-watt zener is used in this 1-watt circuit.

The circuit shown in Fig. 2 was designed so that the array could be mounted inside the wings of an RC airplane, with a "transparent" covering.

Home Energy Saving

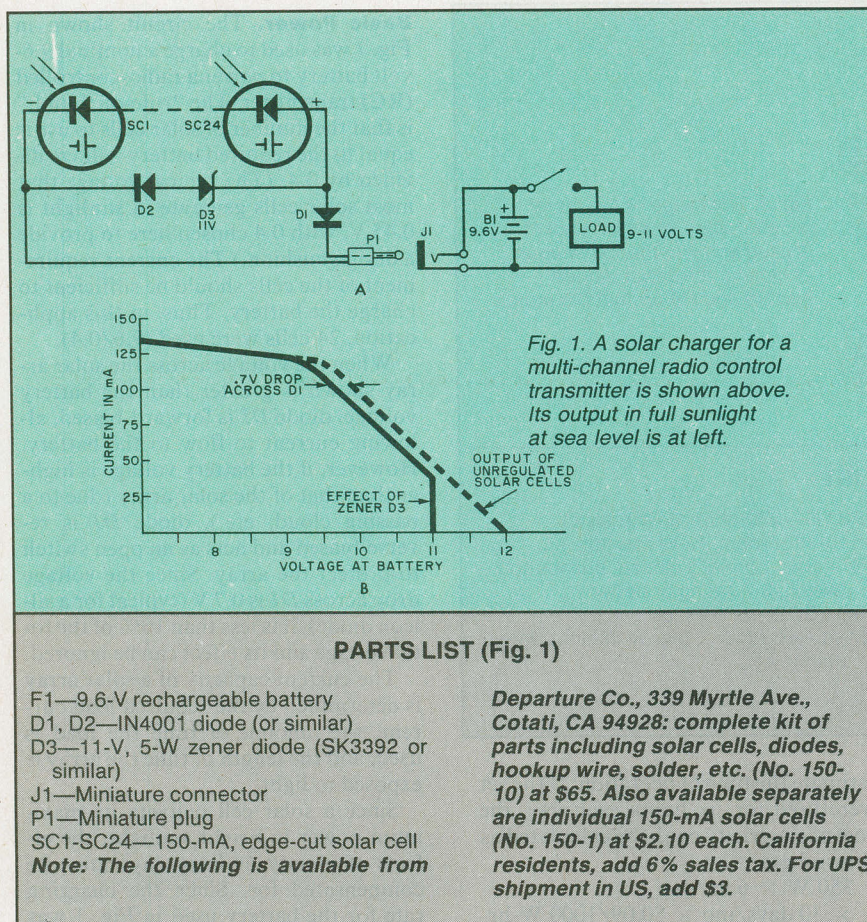

To maintain balance, the array was divided in half, with one half in each wing. The battery had to handle the RC receiver and the servos used to control the airplane.

In this particular application, the load (receiver and servos) was about 50 mA when the servos are idle (about 80% of the time), reaching about 300 mA when two or three servos are operating. We estimated an average drain of about 120 mA from the battery. When this amount is added to the losses due to the "transparent" array covering (estimated at 20 mA), and the misorientation of the arrays with the sun (estimated at 20 mA), the total becomes about 160 mA. Since there is always the possibility of extensive cloud cover, coupled with the fact that we do not like to crash an expensive RC plane due to lack of control, we elected to overspecify the solar array by 100%, with the closest cells having a 300-mA capacity.

Note that blocking diode *D1*'s voltage drop of 0.7-volt is almost 20% of the 4.8-volt battery voltage and must be compensated for in the voltage portion of the array. Since 4.8 volts requires 12

solar cells (4.8/0.4), to compensate for the *D1* drop, 14 cells (5.6 volts) were used, seven on each side. Note that the array voltage can exceed 7 volts depending on light level and loading. Zener diode *D5* coupled with diodes *D2*, *D3*, and *D4* limit the array voltage to a maximum of 6.4 V ($4.3 + 0.7 + 0.7 + 0.7$). When the *D1* drop is accounted for, 5.7 V reaches the battery. *LED1*, connected across the three silicon diodes is optional, and indicates when the arrays are delivering their rated power. The voltage drop across *D2*, *D3*, and *D4* (all silicon diodes) is 2.1 V, enough to operate the LED.

Regulated Power. The circuit in Fig. 3 shows the ability of a low-power (50-mA cells) solar charger to do a large job. The load was a digital meter having a 750-mA current requirement. Since the device is used only about once every other day (at most), and then for less than five minutes, the 50-mA solar array is adequate.

Note the absence of a zener diode. The battery is allowed to float up to about 14.5 V since the load is protected

by 5-volt regulator *IC1*. Always include a blocking diode (like *D1*) to prevent discharge when the solar cells are in the dark. The charger is placed on the workbench close to a window, and receives about two hours of sunlight per day, about four days per week in winter.

The solar cells were laminated directly to the metal case of the instrument and the cell arrays were made using an oven-soldering technique (described later). Care should be taken with the smaller cell arrays as they are quite fragile until after the supporting plastic resin has hardened. This setup has been in operation for quite a while without resorting to a line-powered charger.

The circuit shown in Fig. 4 uses 600-mA solar cells and was designed for a small (28-foot) sailboat that spends its winter moored in the bay and thus requires marker lights. This charger provides enough power to operate the lights and a small electrical bilge pump. The boat goes for weeks before the auxiliary engine is required to fully charge the battery.

Diode *D1* and fuse *F1* prevent the destruction of *LED1* and the solar array in the event of accidental polarity reversal (as in the case of "jump-starting" the engine or other odd circumstances). When all is correct, *LED1* will glow steadily, going out only when the battery is under a heavy load or in the event of a short in the boat's electrical system.

The solar cells should be laminated to marine plywood, making the charger corrosion-resistant and quite strong mechanically. Scratches are repaired by painting on a little plastic resin. Extra solar cells (36, instead of 30 or 32) are used because the charger was intended to be mounted flat on the cabin roof instead of tilted up into the sun, to insure sufficient output even on partly cloudy days and in the winter. No maintenance is required except periodically washing off the salt deposits and adding distilled water to the battery. *PS1* is a weatherproof photoswitch that applies power to marker lamps *L1* and *L2* when it gets dark.

An excellent trickle charger for automotive 12-V batteries can be made by using thirty 150-mA solar cells with a voltage-regulator circuit such as that shown in Fig. 4. The entire solar array can be made into a square about 8" on a side and about 3/4" thick, using 3/8" plywood, #16 (or heavier) leads, and large alligator clips (paint the positive one

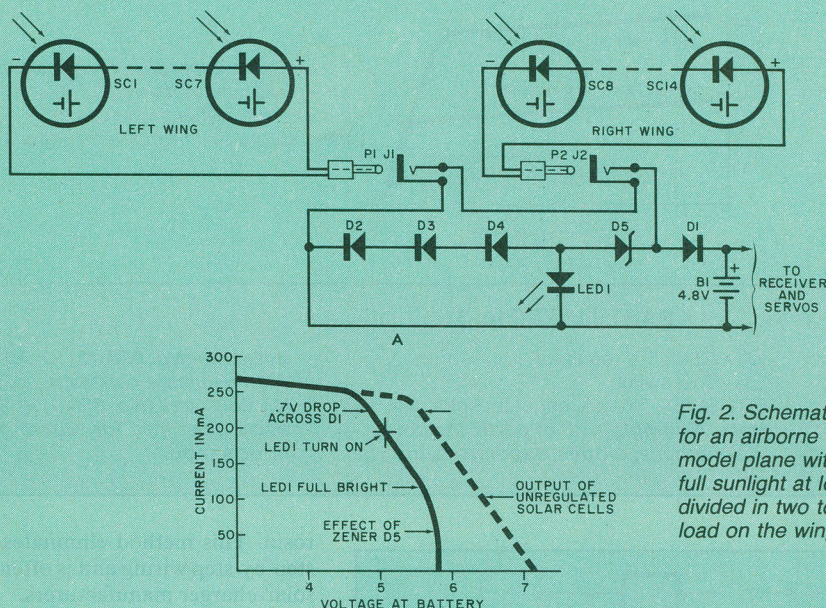


Fig. 2. Schematic of a solar charger for an airborne radio-control model plane with its output in full sunlight at left. The array is divided in two to balance the load on the wings of the plane.

PARTS LIST (Fig. 2)

B1—4.8-V rechargeable battery
 D1-D4—IN4001 diode (or similar)
 D5—4.3-V, 5-W zener diode (SK3380 or similar)
 J1, J2—Miniature connector
 LED1—20-mA red light emitting diode
 P1, P2—Miniature plug

SC1-SC14—300-mA solar cells
Note: A complete kit of parts, including solar cells, diodes, LED, etc., is available (No. 300-5) for \$85. Also available separately is the 300-mA solar cell (No. 300-1) at \$5.80 each. See Fig. 1 for ordering information.

red). A fully charged lead-acid battery will survive -50°F without freezing. This is an important consideration for vehicles left outdoors and unused for long periods during the winter.

The trickle charger will bring a low auto battery up to a full charge with about eight hours of full sun and will not interfere with automotive voltage-regulation circuits.

Acquiring Solar Cells. A great many mail-order houses have solar cells in their catalogs. Some of these cells are factory-fresh, others are edge cuts left over when square cells are cut from round silicon wafers, and still others are rejects that do not deliver 100% of their rated power. Real bargains are available, but it is a good idea to always test every cell. A 100-W light bulb, placed 6 to 8 inches above a cell, should generate 0.45 to 0.52 V and at least 25% of the cell's rated current.

Unless you intend to provide a solid mount for your cell arrays, try to avoid cells that are mechanically weak. Also, stick to blue/gray cells, as these have an

anti-reflective coating and will generate power even when the sun is close to the horizon (high incidence angle).

Examine the grid pattern on the sensitive surface of the cells, and look for a lot of small grid lines that radiate out from a common point or common bus. The less efficient cells have only three or four thick grid lines.

Avoid cells without a solder plating on the rear. Broken solar cells can be repaired, but it requires patience and a steady hand.

Construction Hints. Solar cells are manufactured in high-temperature ovens, so they are not bothered by soldering-iron temperatures. Use irons of 25 to 60 W, and don't press down on the delicate cells. Soldering on the back (positive contact) is usually only a matter of applying enough heat to make a shiny solder puddle, not a dull, gray blob. Solder time is usually about 10 seconds, although reheating is no problem.

Soldering on the grid pattern of the active side (negative contact) can

present some difficulties. Try to avoid reheating a grid line more than two or three times as the exotic metals in the grid can flow into the solder and away from the cell. Perform all soldering operations on a piece of white paper as the hot cells can pick up dirt that might not come off after cooling.

Some solar cells lend themselves nicely to the oven soldering technique. The 50-, 100-, and 150-mA cells are ideal for this. Deposit a small drop of solder at the point of contact on the back side, and a small solder trail on the main grid line on the front. Arrange a group of 6, 8, or 10 cells in the bottom of a Pyrex cake dish so they overlap at the points of contact. Then put the dish in a household kitchen oven (not a microwave), set at 500 to 550°F, and allow it to "bake" for about 20 minutes.

The solder will reflow and make a very good electrical and mechanical connection. Let the dish and solar array cool down before removal from the oven in case the solder is still liquid. If the cell array sticks to the dish, use a little alcohol or acetone to dissolve the

Home Energy Saving

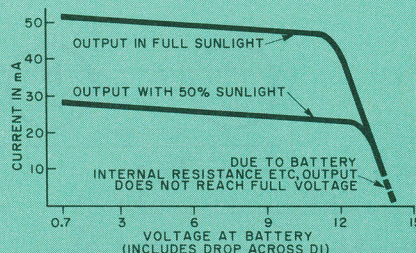
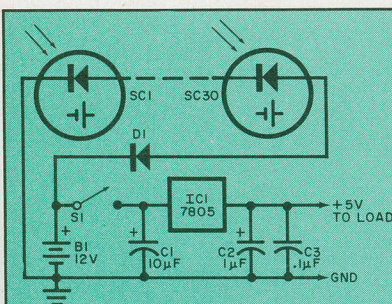


Fig. 3. Using a low-power solar charger on a digital meter having a 750-mA current requirement. The device is seldom used so the 50-mA output is adequate.

PARTS LIST (Fig. 3)

B1—12-V rechargeable battery
C1—10- μ F, 25-V electrolytic
C2—1- μ F, 10-V electrolytic
C3—0.1- μ F, disc capacitor
D1—1N4001 diode (or similar)

IC1—7805 5-V regulator
S1—Spst switch
SC1-SC30—50-mA, edge-cut solar cell
Note: A complete kit of parts, including solar cells, diodes, capacitors, etc., is

available (No. 050-12) for \$37.50. Also available separately is the 50-mA solar cell (No. 050-1) at \$1.10 each. See Fig. 1 for ordering information.

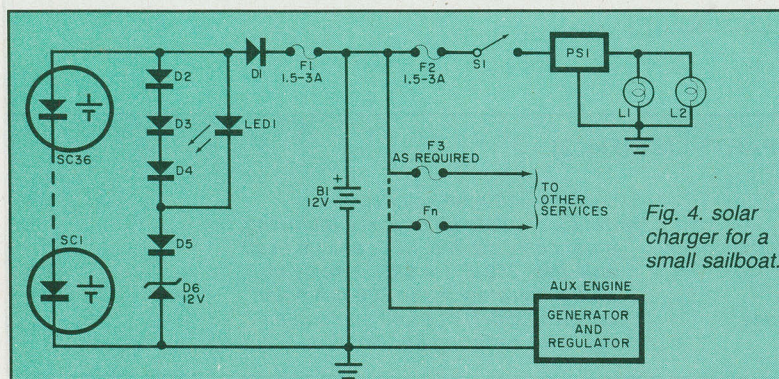


Fig. 4. solar charger for a small sailboat.

PARTS LIST (Fig. 4)

B1—12-V deep-cycle marine battery
D1-D5—1N4005 diode (or similar)
D6—12-V, 50-W zener diode (ECG5254 or similar)
F1, F2—1.5-to-3-A fuse
LED1—20-mA red light emitting diode
PS1—Weatherproof photo switch for 12-V system

S1—Spst switch
SC1-SC36—600-mA solar cells
Note: A complete kit of parts, including solar cells, diode, LED, etc., is available (No. 600-12M) at \$385. Also available separately is the 600-mA solar cell (No. 600-1) at \$10.60 each. See Fig. 1 for ordering information.

rosin. This method eliminates a lot of step-by-step wiring and is often used by solar-charger manufacturers.

Testing Solar Arrays. The test circuit shown in Fig. 5 can be used with groups of five to 500 cells, and current outputs of 10 mA to 1 A. LED1 will glow when any group of five or more cells are positioned 6" to 8" from a 100-W light bulb. The diodes bypass everything over about 2.1 V so LED1 is properly biased. The solar cell arrays are inherently short-circuit protected, so the only limiting factor is the ability of the diodes to pass current. For cell arrays with outputs up to 3 A, use 1N1056 or 1N1226 diodes, or similar.

Mounting Solar Cells. Cells should be positioned by laminating the groups of tested cells to anything relatively rigid, such as 3/8" plywood or 3/64" aluminum sheet. Give the surface a couple of thick coats of clear plastic resin (clear fiberglass resin is available at hobby, boat, or auto-body shops), and allow to set.

Then add a third coat. While it is still wet, fit the assembled and tested solar cell array in place. Finally, paint on three or more coats of plastic resin to completely encapsulate the cells, hook-up wire, diodes, and LED. This makes the entire package corrosion-resistant. If you are mounting onto metal, the plastic will insulate the cells.

There are many companies that make available silicon photovoltaic cells for solar-power use, including Radio Shack and Edmund Scientific (Barrington, NJ). Also, the parts list includes a supply source for parts used in the projects presented here. ◇

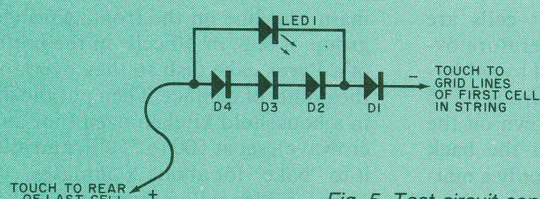


Fig. 5. Test circuit can be used with groups of five to 500 cells and outputs of 10 mA to 1A.

PARTS LIST (Fig. 5)

D1-D4—1N4001 diode (or similar) LED1—20-mA red light emitting diode

Don't miss this exceptional, money-saving opportunity!



The Computer Book Club offers you all the latest titles on hardware, software, theory, and applications, PLUS ready-to-run tapes and disks!

Select 5 fact-filled books for only \$2.95 (total value up to \$99.75)

... and get Computerist's Handy Manual FREE!

1396
List \$13.95

MICROPROCESSOR INTERFACING
BY JOSEPH J. CARR

1050
List \$10.95

COMPUTER GRAPHICS with 29 ready-to-run programs
BY David Chance

1277
List \$19.95

THE MOST POPULAR SUBROUTINES IN BASIC

1380
List \$18.95

30 COMPUTER PROGRAMS FOR THE HOMEOWNER IN BASIC

1394
List \$15.95

PROGRAMMING YOUR APPLE II™ COMPUTER
BY PAUL ORTAN

1276
List \$15.95

THE MASTER HANDBOOK OF TELEPHONES
BY ROBERT J. TRAUTNER

1406
List \$17.95

MICROCOMPUTERS
BY A. J. DIERSEN

1295
List \$16.95

How to Get Started with CP/M
Carl Townsend

1316
List \$16.95

PROJECTS IN MACHINE INTELLIGENCE FOR YOUR HOME COMPUTER

1000
List \$11.95

57 PRACTICAL PROGRAMS & GAMES IN BASIC

1183
List \$14.95

PASCAL
BY DAVID A. HODGSON

1205
List \$16.95

HOW TO BUILD YOUR OWN WORKING ROBOT PET

1295
List \$16.95

55 ADVANCED COMPUTER PROGRAMS IN BASIC
A unique collection of programs for the IBM

1391
List \$17.95

CMOS DATABOOK
BY BILL DUNTER

1088
List \$13.95

WHAT TO DO WHEN YOU GET YOUR HANDS ON A MICROCOMPUTER

1370
List \$22.95

THE MASTER HANDBOOK OF IC CIRCUITS
BY THOMAS R. POWERS

1141
List \$11.95

HOW TO DESIGN, BUILD & PROGRAM YOUR OWN ADVANCED WORKING COMPUTER SYSTEM
BY ROBERT J. DAVILAN

1332
List \$16.95

COMPUTERS FOR EVERYBODY
BY JERRY WILLIS AND NEAL MILLER

1338
List \$14.95

COMPUTERIST'S HANDY MANUAL

984
List \$9.95

SMALL COMPUTERS FOR THE SMALL BUSINESSMAN

1160
List \$13.95

1001 THINGS TO DO WITH YOUR PERSONAL COMPUTER
BY MARK SCHWICH

1350
List \$15.95

119 PRACTICAL PROGRAMS FOR THE TRS-80® POCKET COMPUTER
BY JOHN CLARK CRAN

1251
List \$16.95

PLAYING THE STOCK & BOND MARKETS WITH YOUR PERSONAL COMPUTER
BY C. L. SCHULTE

FREE When you join ...

List \$3.50

7 very good reasons to try The Computer Book Club

Blue Ridge Summit, PA 17214

- **Reduced Member Prices.** Save up to 75% on books sure to increase your know-how
- **Satisfaction Guaranteed.** All books returnable within 10 days without obligation
- **Club News Bulletins.** All about current selections—mains, alternates, extras—plus bonus offers. Comes 13 times a year with dozens of up-to-the-minute titles you can pick from
- **"Automatic Order."** Do nothing, and the Main selection will be shipped automatically! But ... if you want an Alternate—or no books at all—we'll follow the instructions you give on the reply form provided with every News Bulletin
- **Continuing Benefits.** Get a Dividend Certificate with every book purchased after fulfilling membership obligation, and qualify for discounts on many other volumes
- **Extra Bonuses.** Take advantage of added-value promotions, plus special discounts on software, games, and more
- **Exceptional Quality.** All books are first-rate publisher's editions, filled with up-to-the-minute info



The Computer Book Club
Blue Ridge Summit, PA 17214

Please accept my membership in The Computer Book Club and send the 5 volumes circled below, plus a free copy of "Computerist's Handy Manual". I understand the cost of the books selected is \$2.95 (plus shipping/handling). If not satisfied, I may return the books within ten days without obligation and have my membership cancelled. I agree to purchase 4 or more books at reduced Club prices during the next 12 months, and may resign any time thereafter.

334 336 337 338 984 1000 1050 1088 1141
1160 1183 1205 1251 1276 1277 1295 1316
1332 1350 1370 1380 1391 1394 1396 1397 1406

Name _____ Phone _____

Address _____

City _____

State _____ Zip _____

(Valid for new members only. Foreign and Canada add 20%. Orders outside U.S. or Canada must be prepaid with international money orders in U.S. dollars.)

This order subject to acceptance by The Computer Book Club PECC-882

A 16-BIT MATH PACKAGE FOR ELF COMPUTERS

Software provides all basic mathematic functions and operations on a minimum 1802-cpu configuration

BY R.S. FITZGERALD

WHILE there are many cassette-based programs for the Elf microcomputer based on the 1802 cpu, there are few that run on its minimum configuration of 256 bytes. This article describes a 16-bit mathematics package that will indeed operate in a minimum system. The package includes operators and functions for addition, subtraction, multiplication, division, negation, and absolute values. All of these are implemented in a package using only 134 bytes.

Since this package, which we call "MATH 16," depends upon the use of the stack operations, it would be best to review them before discussing operation of the package. The stack is a variable-sized data-storage area that can be located in any convenient memory area. It is addressed by a pointer called the stack pointer (SP). The stack grows in size as the SP moves upward (lower memory addresses), much like a stack of dishes in a spring-loaded dish compartment. Also like a stack of dishes, it shrinks as the bytes are removed. Stack operations are defined in "Stack Operations—A Review," accompanying this article.

The object code representation of "MATH 16" appears in Table I. The program is assembled starting at location 70 hex. This allows room for 5 operands

on the stack in a 256-byte Elf (probably more than you'll ever need), and ample space for some type of monitor in low memory. Of course, if your Elf (or any other 1802-based microcomputer has more than 256 bytes of memory, "MATH 16" can be moved around to suit your needs. If you intend to do this, remember to modify the addresses in your calling routines and the jump addresses within "MATH 16."

The stack can exist any place in memory that is convenient, the only restriction being that the stack pointer (RX) must be R₂. All of the subroutines leave RX point-

ing at the next available byte on the stack. Thus, the value in the stack pointer will be one less than the address of the most-significant byte of the number on the top-of-stack (TOS). Each of the functions is terminated with a SEP R₃ instruction to return to the calling routine. If your driver routine uses some other register than R₃ as the program counter, these SEP instructions must be changed to reflect this.

Table II lists the entry point addresses for the various "MATH 16" subroutines. The functions are executed by performing a subroutine call to the address corre-

TABLE I—MATH 16 MACHINE-LANGUAGE PROGRAM


70	60	72	BF	72	60	F5	73	9F	75	73	D3	60	72	BF	72	60
80	F4	73	9F	74	73	D3	60	F0	73	FE	CF	D3	C4	60	60	F8
90	00	F7	73	F8	00	77	73	D3	60	72	BF	F0	AF	F7	FE	73
A0	52	F8	11	AE	F8	04	AD	F0	76	52	60	2D	8D	3A	A7	22
B0	22	22	2E	8E	C6	D3	C4	22	3B	A4	12	8F	F4	73	9F	74
C0	52	30	A4	60	72	BF	F0	AF	F7	FE	73	52	F8	11	AE	60
D0	60	60	F8	04	AD	F0	7E	73	2D	8D	3A	D5	60	60	2E	8E
E0	C6	D3	C4	8F	F5	73	9F	75	52	33	CF	60	8F	F4	73	9F
F0	74	52	FC	00	30	CF	00	00	00	00	00	00	00	00	00	00

STACK OPERATION—A REVIEW

Shown here are some pictorial representations of various stack operations such as PUSH, POP, and all of the operations performed by "MATH 16." Each box on the stacks in the drawing represents one data item or two bytes. Remember that the stack pointer is left pointing at the next available byte on the stack. For reference purposes, here are the terms involved.

Term	Meaning
LIFO Stack	The computer analogy to a pile of dishes. The last item (plate) to be placed on the stack (pile) will be the first one removed, hence the name Last In First Out Stack. Most often, the LIFO is omitted.
TOS	An acronym for Top Of Stack. This name refers to the data item that has been most recently placed on the stack.

NOS	An acronym for Next On Stack. This refers to the second data item on the stack.
Stack Pointer	The register that is used as a pointer to reference data items on the stack. Denoted RX in the 1802.
PUSH	To PUSH an item on the stack means to add another item to the stack and adjust the stack pointer so that it is pointing at the next available byte. A PUSH causes the stack to "grow" toward address 0000. STXD (73) is used in the 1802 to PUSH data.
POP	The opposite of PUSH. The IXX (60), LDXA (72) instruction sequence is used to implement this function.

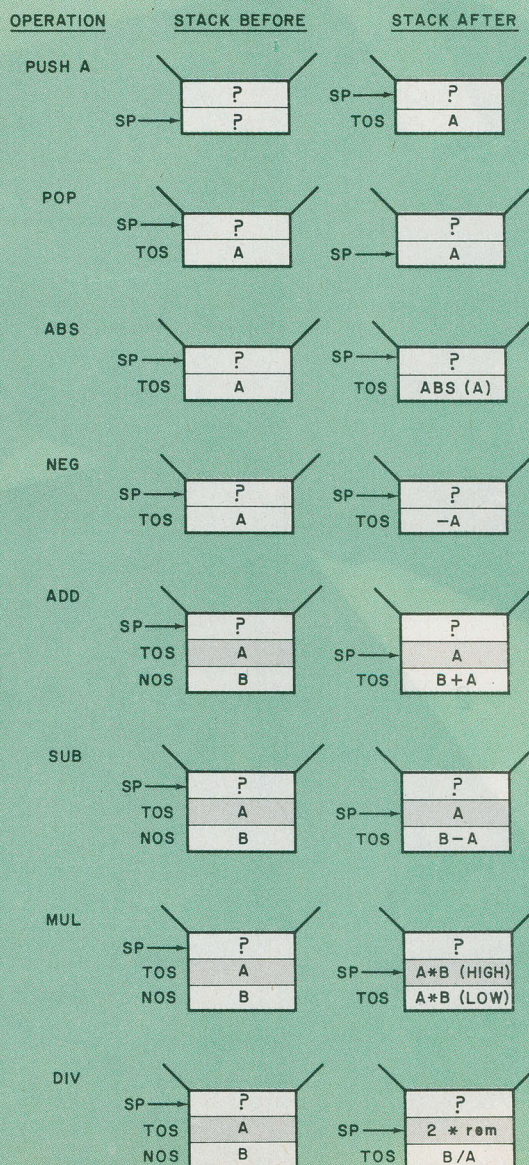

sponding to the function desired. For example, the recommended calling procedure for the multiply function is shown in Table III.

At this point, it will be instructive to refer again to "Stack Operations—A Review." The illustrations show what happens when the various arithmetic operations are performed. As you can see, some of the functions operate on only one number (ABS, and NEG), while others operate on two numbers. Both types will be discussed.

The one-operand functions take their operand from TOS, perform the selected operation on that number, and return the result to TOS. With these functions, the stack neither grows nor shrinks.

The function NEG replaces TOS with the negative of itself. As an example, 0001 becomes FFFF (−1 in two's complement notation). ABS will return the absolute value of TOS. If the TOS contains FFFE (−2) before the call to ABS is made, the value after ABS has been called will be 0002.

The two-operand functions take both of their operands from the stack and return the result to the old NOS. The stack pointer is then adjusted so that the old next on-stack (NOS) becomes the new TOS (that is, the stack shrinks by 2 bytes). Care must be taken if some intermediate result on the stack needs to be saved for a later operation since the stack pointer is modified and NOS is overwritten by the new TOS. A good place to save these intermediate results is in RC because it is not modified by any of the "MATH 16" operations. Actually, the only registers that "MATH 16" deals with are: R₂, R₃, R₄, RD, RE, and RF.

As the name implies, ADD will sum TOS and NOS. As with all of the two-operand functions, the stack pointer will end up pointing two bytes higher than when it started out (SP = SP + 2).

The function SUB will subtract TOS from NOS. If you are really short on memory space, the SUB routine can be deleted. This same function can be achieved by a call to NEG, then to ADD. This saves 11 bytes.

The subroutine MUL computes the product of the *unsigned* numbers at TOS and NOS. The fact that unsigned numbers are used means that a result of FFFF does not indicate a result of −1 as might be expected. Rather, it indicates a result of 65535.

As with the multiply subroutine, DIV operates on unsigned numbers. In this case, the operand at NOS is divided by the operand at TOS. Since all of the subroutines operate on integers, no fractions can be obtained with DIV. The division routine does not check for division by zero. This condition must be avoided for DIV to produce meaningful results.

(Continued on page 66)

EQUIPMENT AND TRAINING NO OTHER SCHOOL CAN MATCH.

**NTS HOME TRAINING INVITES YOU TO EXPLORE MICROCOMPUTERS,
DIGITAL SYSTEMS AND MORE, WITH STATE-OF-THE-ART EQUIPMENT
YOU ASSEMBLE AND KEEP.**


Without question, microcomputers are the state of the art in electronics. And NTS is the only home study school that offers you training for this booming field with a choice of 3 production-model micro computers.

We'll explain the principles of troubleshooting and testing your microcomputer and, best of all, we'll show you how to program it to do what you want.

You'll use a digital multimeter, a digital logic probe and other sophisticated testing gear to learn how to localize problems and solve them.

Send for the full color catalog in the electronics area of your choice—discover *all* the advantages of home study with NTS!

NTS also offers courses in Auto Mechanics, Air Conditioning and Home Appliances. Check card for more information.

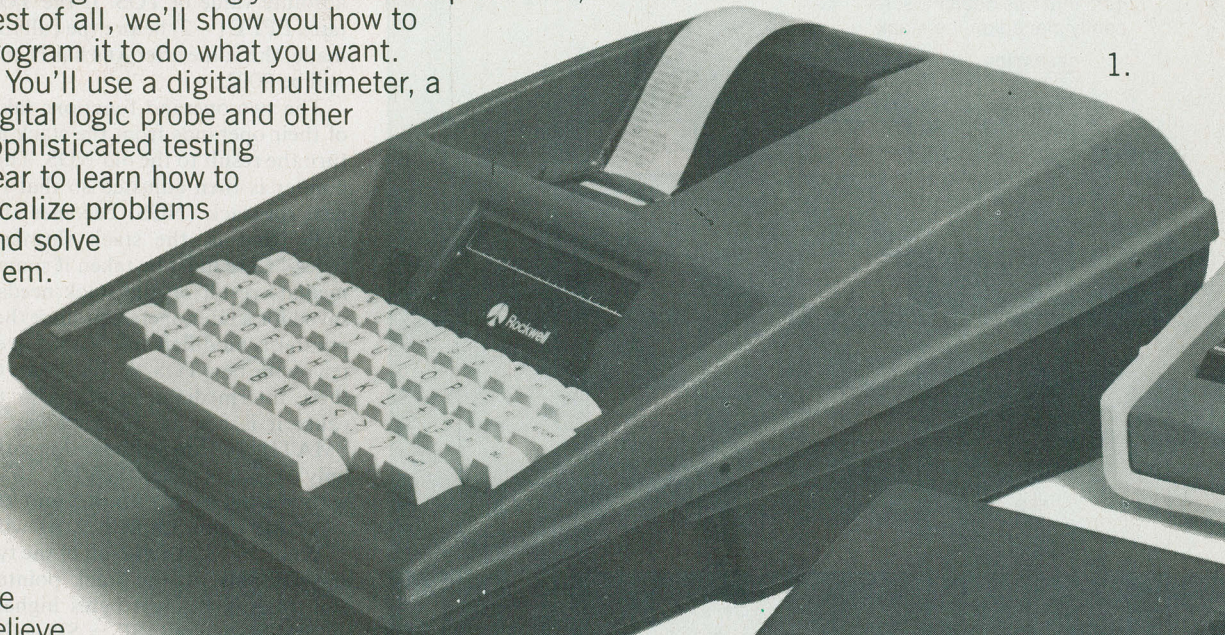


We believe that training on production-model equipment, rather than home-made learning devices, makes home study more exciting and relevant. That's why you'll find such gear in most of NTS's electronic programs.

For instance, to learn Color TV Servicing you'll build and keep the 25" (diagonal) NTS/HEATH digital color TV.

In Communications Electronics you'll be able to assemble and keep your own NTS/HEATH 2-meter FM transceiver, plus test equipment.

But no matter which program you choose, NTS's Project Method of instruction helps you quickly acquire practical know-how.

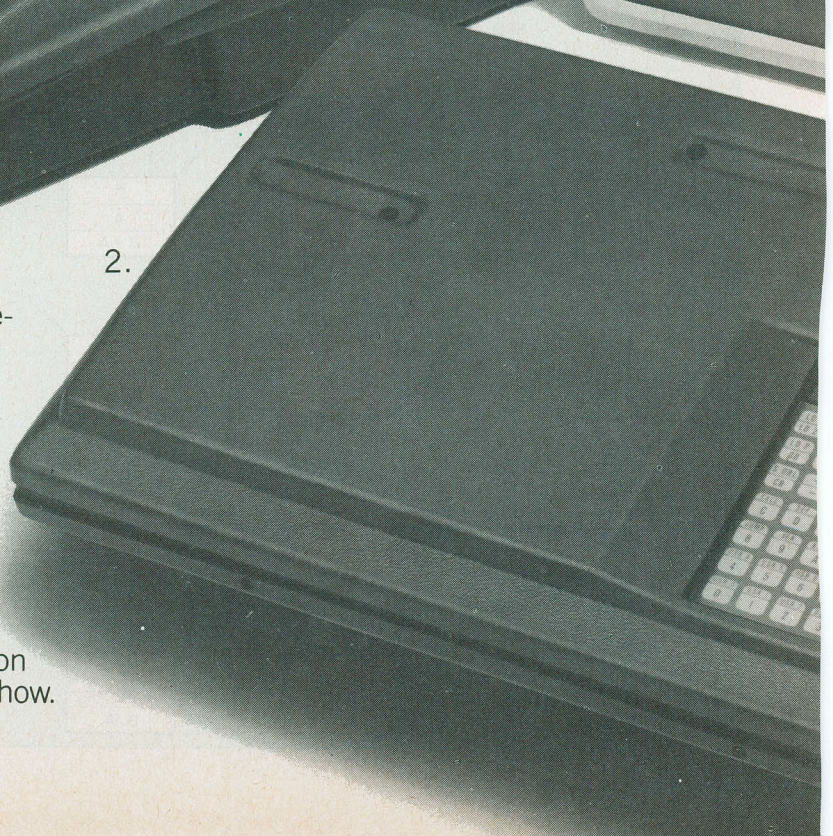




Simulated TV Reception

4.

3. The NTS/Heath HN-89A Microcomputer features floppy disk storage, "smart" video terminal, two Z80 microprocessors, with 32K RAM Memory, expandable to 64K on board. 4. The NTS/Heath GR 2001 Digital Color TV (25" diagonal) features specialized AGC-SYNC muting, filtered color and new solid-state high voltage tripler rectifier.

NTS NATIONAL TECHNICAL SCHOOLS

TECHNICAL-TRADE TRAINING SINCE 1905
Resident and Home-Study Schools
4000 SO. FIGUEROA ST., LOS ANGELES, CA. 90037



1. The NTS/Rockwell AIM 65 Dedicated Microcomputer A Single board unit featuring on board printer and display—4K RAM (expandable). Application Functions: Central processor—Controller/Monitor—Development System. 2. "The NTS/SYM-1 Microcomputer" 6502 Based CPU—4K bytes ROM (expandable)—1K RAM (expandable). 51 active I/O lines for versatile interfacing: disk drives, ASCII key boards, cassette tape, etc.

NATIONAL TECHNICAL SCHOOLS

4000 South Figueroa Street, Dept. 205-082
Los Angeles, California 90037

Please rush FREE color catalog on course checked below

- | | |
|---|---|
| <input type="checkbox"/> MicroComputers/MicroProcessors | <input type="checkbox"/> Auto Mechanics |
| <input type="checkbox"/> Communications Electronics | <input type="checkbox"/> Air Conditioning |
| <input type="checkbox"/> Digital Electronics | <input type="checkbox"/> Home Appliances |
| <input type="checkbox"/> Industrial Technology | <input type="checkbox"/> Color TV Servicing |

Name _____ Age _____

Address _____

Apt. _____ City _____

State _____ Zip _____

- ☐ Check if interested in G.I. information.
☐ Check if interested ONLY in classroom training in Los Angeles.

Here's why we're Number One.

When it comes to logic probes, more people buy Global Specialties. Because no one can match us for value. Our four logically-priced probes—including our remarkable new 150 MHz ECL—deliver more speed, accuracy, flexibility and reliability than others costing considerably more! So why compromise? Discover for yourself why we're the number-one logical choice!



Standard LP-1, \$50.00* with memory—captures pulses to 50 nsec, 10 MHz, guaranteed.

Economy LP-2, \$32.00* to 50 nsec, 1.5 MHz.

High-speed LP-3, \$77.00* with memory, guaranteed to 10 nsec (6 nsec, typical), 50 MHz!

New ECL LP-4, \$150.00*, the new industry standard—with memory, guaranteed to 4 nsec (2 nsec, typical), 150 MHz!

GLOBAL SPECIALTIES CORPORATION

70 Fulton Terr. New Haven, CT 06509 (203) 624-3103. TWX 710-465-1227
OTHER OFFICES: San Francisco (415) 648-0611. TWX 910-372-7992
Europe: Phone Saffron-Walden 0799-21682. TLX 817477
Canada: Len Finkler Ltd. Downsview Ontario

Call toll-free for details
1-800-243-6077

During business hours

*Suggested U.S. resale. Prices, specifications subject to change without notice.
© Copyright 1981 Global Specialties Corporation

CIRCLE NO. 20 ON FREE INFORMATION CARD

math package

TABLE II—ARITHMETIC FUNCTION ENTRY POINTS

Name	Function	Call Address
SUB	Subtraction	70
ADD	Addition	7B
MUL	Multiplication	98
DIV	Division	C3
ABS	Absolute Value	86
NEG	Negation	8D

TABLE III—CALLING PROCEDURE

Address	Contents	Mnemonic	Comments
N	F898	LDI A(MUL)	.SET UP SUBROUTINE
N+2	A4	PLO R4	.PROGRAM COUNTER
N+3	D4	SEP R4	.CALL MULTIPLY FUNCTION
		*	
		*	

It is interesting to note that the multiply and divide subroutines have some nice features which have not yet been mentioned. The multiply routine actually performs a 32-bit multiplication, but the stack pointer is adjusted, upon exit, to point at the least-significant 16 bits of the product. If you desire a 32-bit product, simply decrement the stack pointer twice by including two DEC R₂ instructions in your driver routine after the call to MUL.

The divide subroutine, on the other hand, only operates on 16-bit numbers. However, if the stack pointer is decremented by 2 after the division operation, the number on the TOS is two times the remainder of the previous division. The true remainder can be obtained either by shifting this number right one bit or by pushing a word of 0002 on the stack and calling the divide subroutine again.

Applied Example. The program segment in Table IV shows how to multiply

two numbers using "MATH 16." Note that the least-significant byte of a 16-bit number is stored at address x, while the most-significant byte is stored at address x-1. This convention is used throughout.

After this routine is executed, the new TOS will contain 2710, which is 10000 in decimal notation.

"MATH 16" does have some limitations, such as error checking and integer-only arithmetic. But it can still provide one with a powerful tool for the 1802 system. ◇

SOFTWARE AVAILABILITY

The following are available from the Softek Co., Box 4232, Santa Fe, NM 87501: A documented source listing of "MATH 16" plus several sample applications of the package for \$2.50 (item MATH 16S), and a quick-reference guide for the 1802 cpu's instructions and respective opcodes for \$1 (item 1802Q).

TABLE IV—MULTIPLICATION PROGRAM

Address	Contents	Mnemonic	Comments
N	F8E8	LDI E8	.PUSH THE
N+2	73	STXD	.DECIMAL NUMBER
N+3	F803	LDI 03	.1000 ONTO
N+5	73	STXD	.THE STACK
N+6	F80A	LDI 0A	.PUSH THE
N+8	73	STXD	.DECIMAL NUMBER
N+9	F800	LDI 00	.10 ONTO
N+11	73	STXD	.THE STACK
N+12	F898	LDI A(MUL)	.SET R4 EQUAL TO
N+14	A4	PLO R4	.MUL ENTRY POINT
N+15	D4	SEP R4	.CALL MULTIPLY
N+16	00	IDL	.HALT

PROGRAMMING EPROM's WITH A SMALL COMPUTER

BY JOHN DOOLITTLE
AND SLOBODAN TKALCEVIC

Part 2

IN Part 1 of this article, we discussed how EPROMs can be put to good use in expanding your digital design work. We then presented a circuit that can be used as an interface with a small computer such as the TRS-80 to program EPROMs. We are ready to proceed now with constructing the circuit.

Construction. The EPROM Programmer is designed so that all components except for the ac power supply are mounted on a double-sided printed circuit board such as that shown in Fig. 7. The four lines from the transformer secondary (color-coded blue, yellow, red, and green) are soldered to the corresponding points on the printed circuit board marked B, Y, R, and G. Connection to the computer is done through a 40-pin card-edge connector that is compatible with the expansion bus of the TRS-80 CPU or Expansion Interface unit. All components are mounted on the bottom side of the board—except the zero insertion force EPROM socket, the personality module socket, and the indicator LEDs. These parts mount on top of the board. The printed circuit can be neatly mounted in a 7" by 6" by 3" aluminum enclosure using ¼-inch spacers and allowing the topside components to protrude through the top

panel. Access to the board's edge connector is made through a notch in the rear panel.

With all components soldered in place, switchable voltage regulators IC7 and IC8 should be adjusted (*R8* and *R12*) to develop 25.5 V and 5.0 V, respectively, before connecting the EPROM Programmer to the computer. The personality module socket is a convenient test point for the constant -5-V (pin 1) and 12-V (pin 4) supplies as well as for the switchable 5-V (pin 2) and 25.5-V (pin 3) supplies. The constant 5-V supply can be measured at pin 24 of the EPROM socket.


To use the EPROM Programmer with computers other than the TRS-80 Model I, a simple adapter card can be designed to interconnect the appropriate data, address, and control lines. Since ribbon cables terminated by identical connectors have the property of interchanging the lines top to bottom (but not right to left), care must be used to see that the routing is correct. In some applications, additional logic may be necessary to meet the I/O requirements of the host computer. If so, 5 V can be made available at the card edge to power external logic by simply inserting a jumper at point "J" on the printed circuit. Of course, this jumper

should *not* be connected for use with the TRS-80.

Software. To accommodate up to 4K by 8-bit EPROMs, two 4K-byte buffers should be reserved in the TRS-80 memory. The first is a listing buffer which is used by the List, Verify, Copy, and Erasure verification routines to store data read in from an EPROM. The second is a programming buffer which contains data to be programmed into an EPROM. While the same memory space could be used for each task at different times, it is easiest to use separate buffers.

The software driver for the EPROM Programmer could be written in BASIC where the port-addressed I/O is handled by INP and OUT statements. Using a BASIC program for such a large task would require a large amount of memory and would operate slowly because of interpreter overhead. A better approach is to write the driver in assembly language. (The software driver written by the authors easily fits into 4K bytes of memory space.) See the Parts List in Part 1 of this article for information on ordering the software.

Sequential EPROM addresses are generated in software simply by incrementing a 12-bit counter and output-

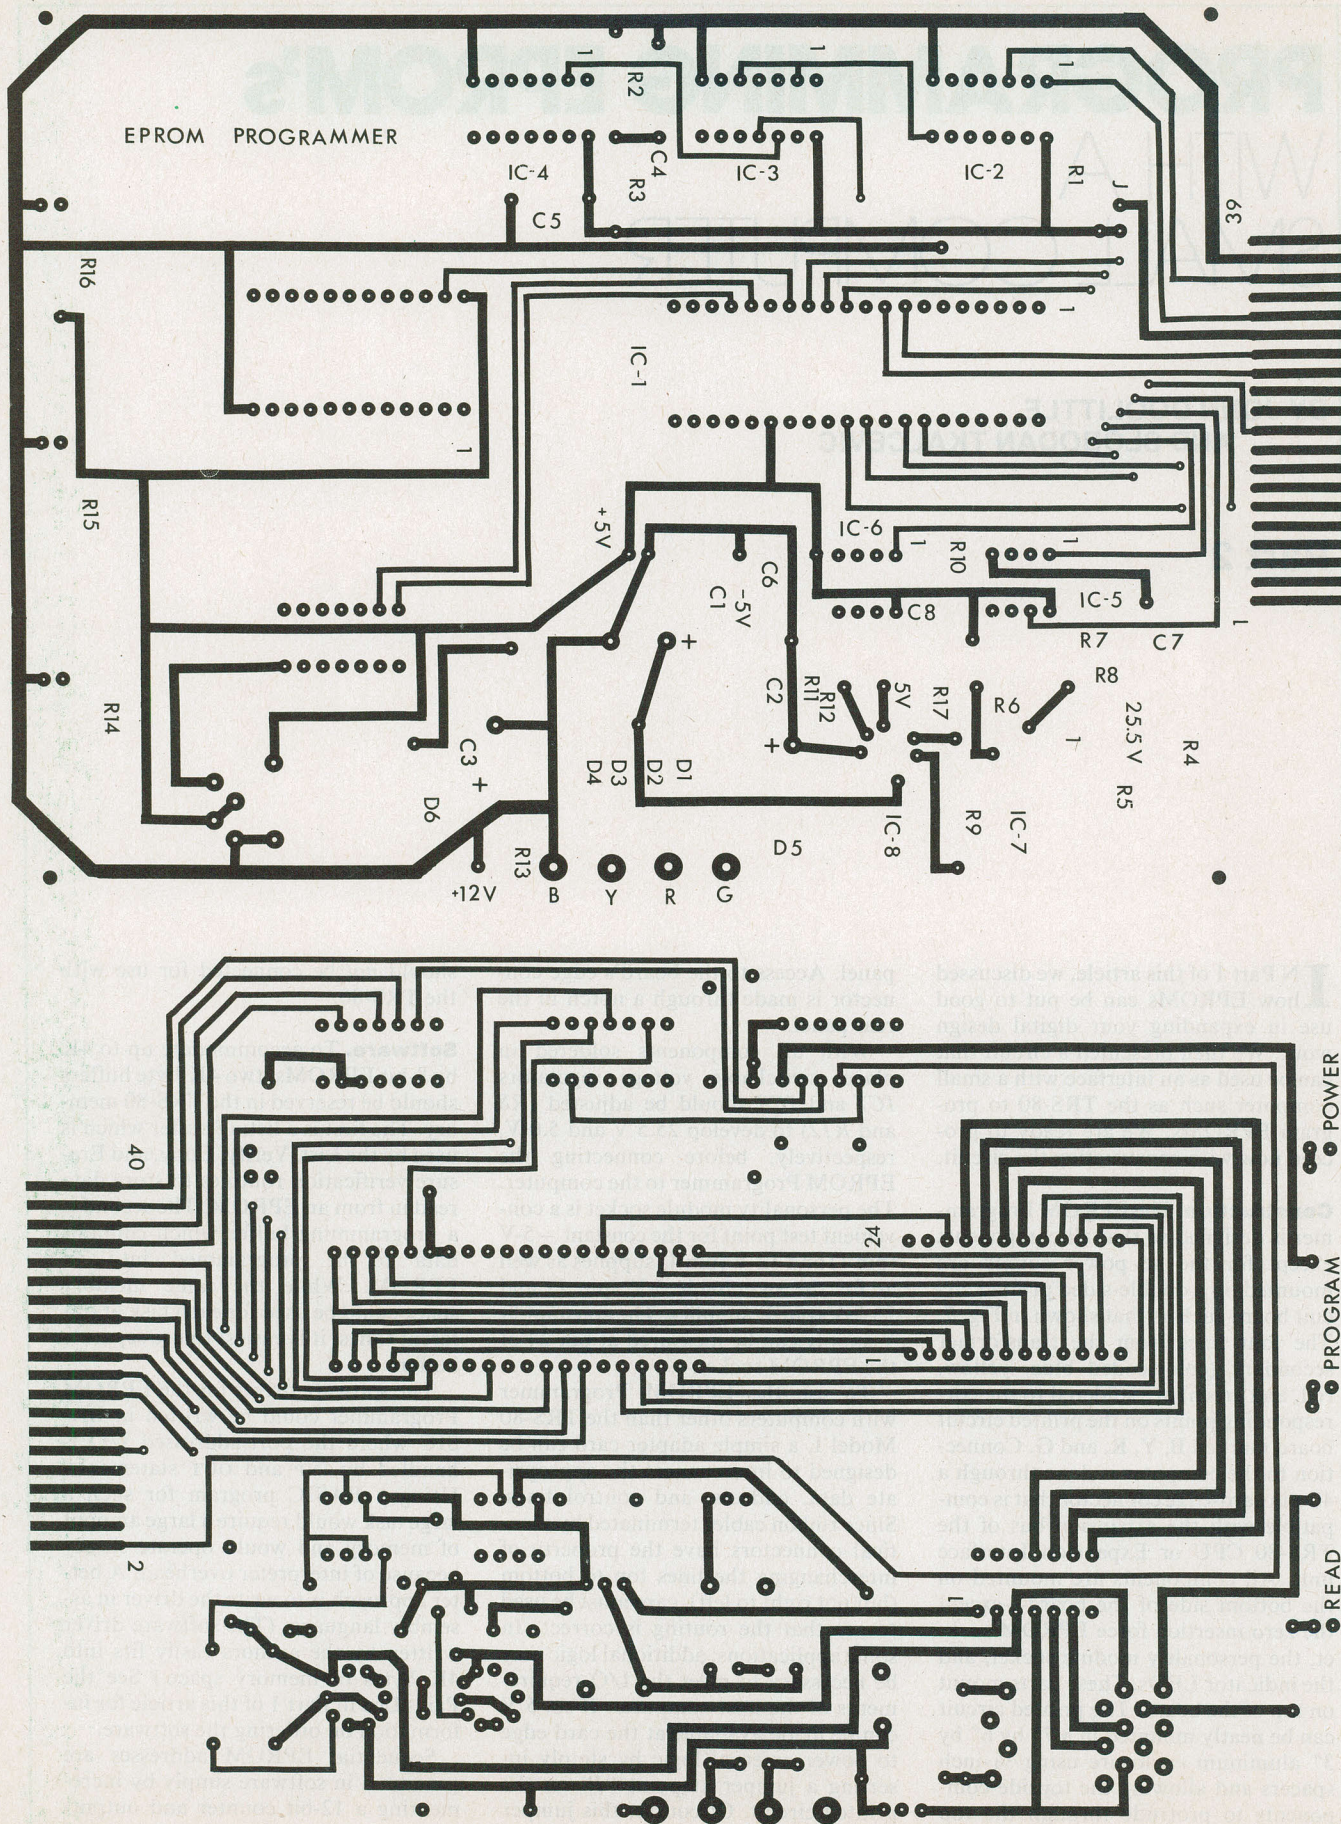

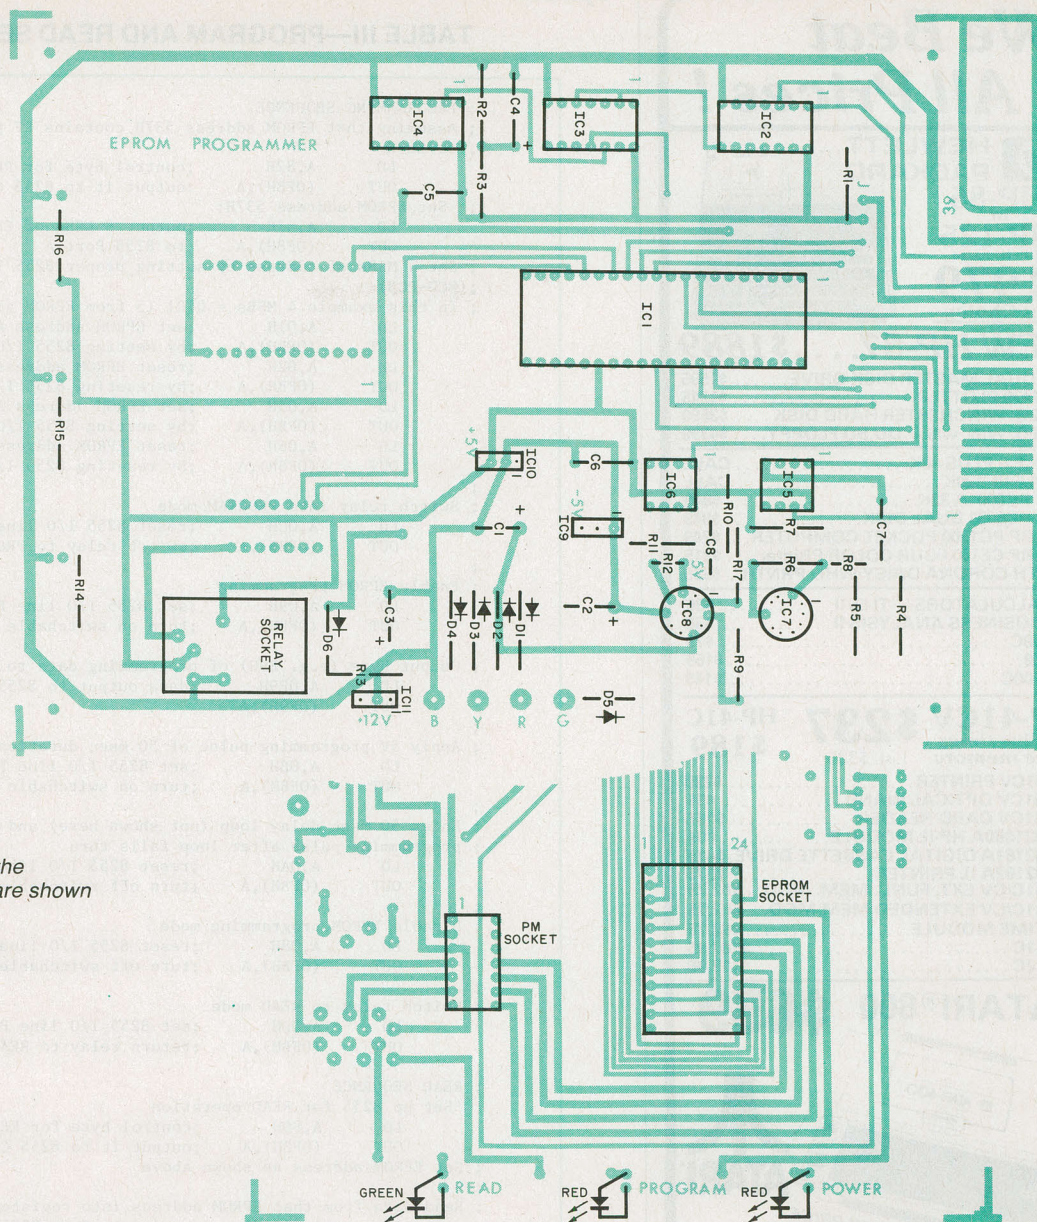


Fig. 7. Foil patterns for the double-sided pc board are shown on opposite page, while component layout is above and at right.

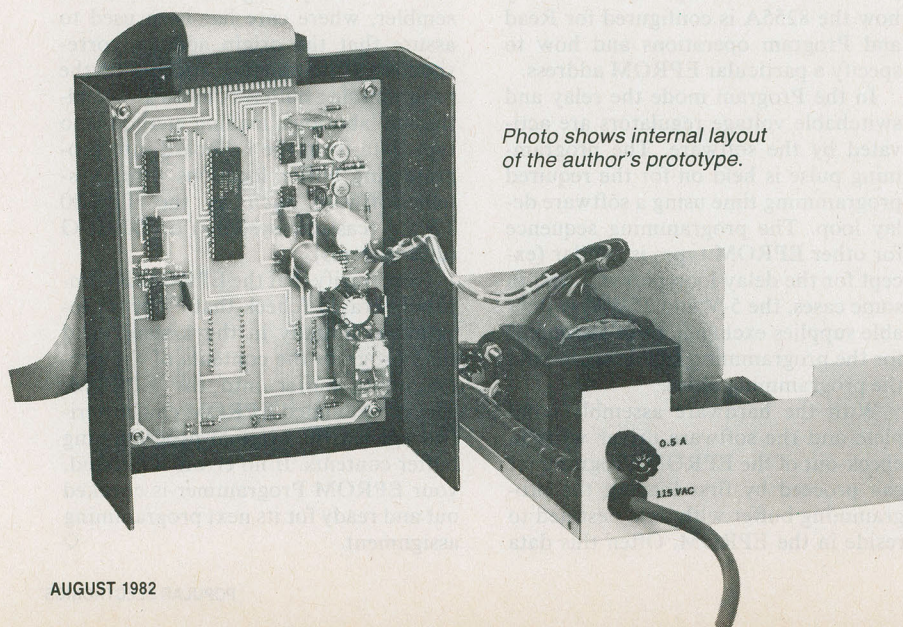


Photo shows internal layout of the author's prototype.

ting the low-order eight-bits to the 8255A's port A while the remaining high-order four-bits determine whether the port C bits (PC0-PC3) are set or reset. Address pointers to the corresponding buffer locations in the computer memory can be determined by adding the buffer starting address to the counter value. Table II shows the appropriate control bytes which must be sent to the 8255A's control port to set or reset the various lines of port C. Also shown in Table II are the control bytes which configure the 8255A for Read or Program modes.

Table III shows how to program and read data for a single location of a 2716 EPROM using Z80 assembly language. (The CPU I/O port addresses and control bytes used are those listed in Tables

We Beat All Prices!

hp HEWLETT PACKARD
HP-85
 or
HP-125
 CP/M[®] based.
\$1979
 Your Choice



NEW HP-87...\$1889

5 1/4" DUAL MASTER DISK DRIVE..... \$1595
 HP-7470 PLOTTER..... \$1245
 5 MEG. WINCHESTER HARD DISK..... \$3599
 5 MEG. WIN. w/5 1/4" DD, SD FLOPPY..... \$4399

APPLE II PLUS 48K..... CALL
 APPLE III 128K..... CALL
 NEC PC8001A 32K..... \$849
 NEC PC8031 DUAL DISK..... \$849
 SHARP PC1500 POCKET COMPUTER..... \$249
 SHARP CE150 FOUR COLOR Printer..... \$215
 SMITH-CORONA DAISY-WHL. PRNTR..... \$695

TI CALCULATORS - TI-55 II..... \$36
 TIP BUSINESS ANALYSIS II..... \$36
 TIP-58C..... \$79
 TIP-59..... \$169
 TIP-100C..... \$149

HP-41CV \$237 **HP-41C \$189**
 w/Five times more memory List. \$325

HP-41CV PRINTER..... \$289
 HP-41CV OPTICAL WAND..... \$99
 HP-41CV CARD READER..... \$165
 HP-821060A HP-IL MODULE..... \$99
 HP-82161A DIGITAL CASSETTE DRIVE..... \$419
 HP-82162A IL PRINTER..... \$375
 HP-41C/CV EXT. FUNC. MEM. MOD..... \$62.75
 HP-41C/CV EXTENDED MEM. MOD..... \$62.75
 HP TIME MODULE..... \$62.75
 HP-11C..... \$107.95
 HP-12C..... \$119.95

ATARI® 800 \$659



ATARI
 NEW LOW PRICE
ATARI 400 \$319

ATARI 16K MEMORY MODULE..... \$75.00
 ATARI 823 80 COL. IMPACT PRNTR..... \$565
 ATARI 410 PROGRAM. RECORDER..... \$79
 ATARI 810 DISK DRIVE..... \$419

—APPLE OWNERS—

APPLE II CP/M® Conversion Special
 Included MicroSoft Softcard, (a board with Z-80, with MicroSoft BASIC and CP/M® included). MicroSoft's buffered 16K RAM board, the VIDEX VIDEOTERM 80 Column board, with a soft video switch and inverse video.

All for only, **\$599.** (Limited time only)

Lowest prices on CCS & SSM
APPLE Interface Boards!

Special prices on VisiCalc®
and other VisiCorp Software
 (Formerly Personal Software)

Personal Computer Systems
 (315) 478-6800
 All prices are subject to change without notice.
 609 Butternut St.
 P.O. Box 1073
 Syracuse, N.Y. 13201
 Prices do not include shipping

CIRCLE NO. 38 ON FREE INFORMATION CARD

eprom

TABLE III—PROGRAM AND READ SEQUENCE

```
; PROGRAMMING SEQUENCE
; Assuming that EPROM address 537H contains FF program it
; to 0E9H
LD A,82H ;control byte for PROGRAM mode
OUT (0FBH),A ;output it to 8255 CONTROL port
; Set EPROM address 537H:
LD A,37H ;output 8 LSBs of EPROM address
OUT (0FBH),A ;to 8255 Port A
; Set 4 MSBs of address by setting proper 8255 I/O lines
; (PC0-PC3)
; In this example 4 MSBs = 0101 (5 from EPROM address)
LD A,01H ;set EPROM address A8
OUT (0FBH),A ;by setting 8255 I/O line PC0
LD A,02H ;reset EPROM address A9
OUT (0FBH),A ;by resetting 8255 I/O line PC1
LD A,05H ;set EPROM address A10
OUT (0FBH),A ;by setting 8255 I/O line PC2
LD A,06H ;reset EPROM address A11
OUT (0FBH),A ;by resetting 8255 I/O line PC3

; Switch relay into PROGRAM mode
LD A,0CH ;reset 8255 I/O line PC6 to
OUT (0FBH),A ;switch relay to PROGRAM mode

; Enable EPROM programming
LD A,09H ;set 8255 I/O line PC4 to
OUT (0FBH),A ;turn on switchable 25.5V

; Output byte (e.g. E9H) of programming data to EPROM
LD A,0E9H ;data output to 8255 Port B
OUT (0F9H),A

; Apply 5V programming pulse of 50 msec duration
LD A,0BH ;set 8255 I/O line PC5 to
OUT (0FBH),A ;turn on switchable 5V

; Enter 50 msec delay loop (not shown here) and turn off
; programming pulse after loop falls thru
LD A,0AH ;reset 8255 I/O line PC5 to
OUT (0FBH),A ;turn off switchable 5V

; Disable EPROM programming mode
LD A,08H ;reset 8255 I/O line PC4 to
OUT (0FBH),A ;turn off switchable 25.5V

; Switch relay to READ mode
LD A,0DH ;set 8255 I/O line PC6 to
OUT (0FBH),A ;return relay to READ mode

; READ SEQUENCE
; Set up 8255 for READ operation
LD A,80H ;control byte for READ mode
OUT (0FBH),A ;output it to 8255 CONTROL port
; Set EPROM address as shown above
; Read data from that EPROM address into register A:
IN A,(0F9H) ;read data from 8255 Port B
```

I and II.) This example shows exactly how the 8255A is configured for Read and Program operations and how to specify a particular EPROM address.

In the Program mode the relay and switchable voltage regulators are activated by the software. The programming pulse is held on for the required programming time using a software delay loop. The programming sequence for other EPROM types is similar (except for the delay loop period). And in some cases, the 5-V and 25.5-V switchable supplies exchange roles as sources for the programming enable signal and the programming pulse.


With the hardware assembly complete and the software driver written, check-out of the EPROM Programmer can proceed by first loading the programming buffer with data destined to reside in the EPROM. Often this data

will be a binary file generated by an assembler, where care has been used to assure that the origin address corresponds to the starting address of the programming buffer. A more direct, although laborious, loading method is to type data from the keyboard into programming buffer locations using system software such as the TRS-80 TBUG (cassette systems) or DEBUG (disk systems).

Next, verify that the EPROM is completely erased (check that every bit location is initially in the 1 state), and then program the contents of the programming buffer into the EPROM. The programmed EPROM can be verified against the original programming buffer contents. If no errors are found, your EPROM Programmer is checked out and ready for its next programming assignment. ◇

Popular Electronics Tests

The Triplet Model 7000 Universal Counter

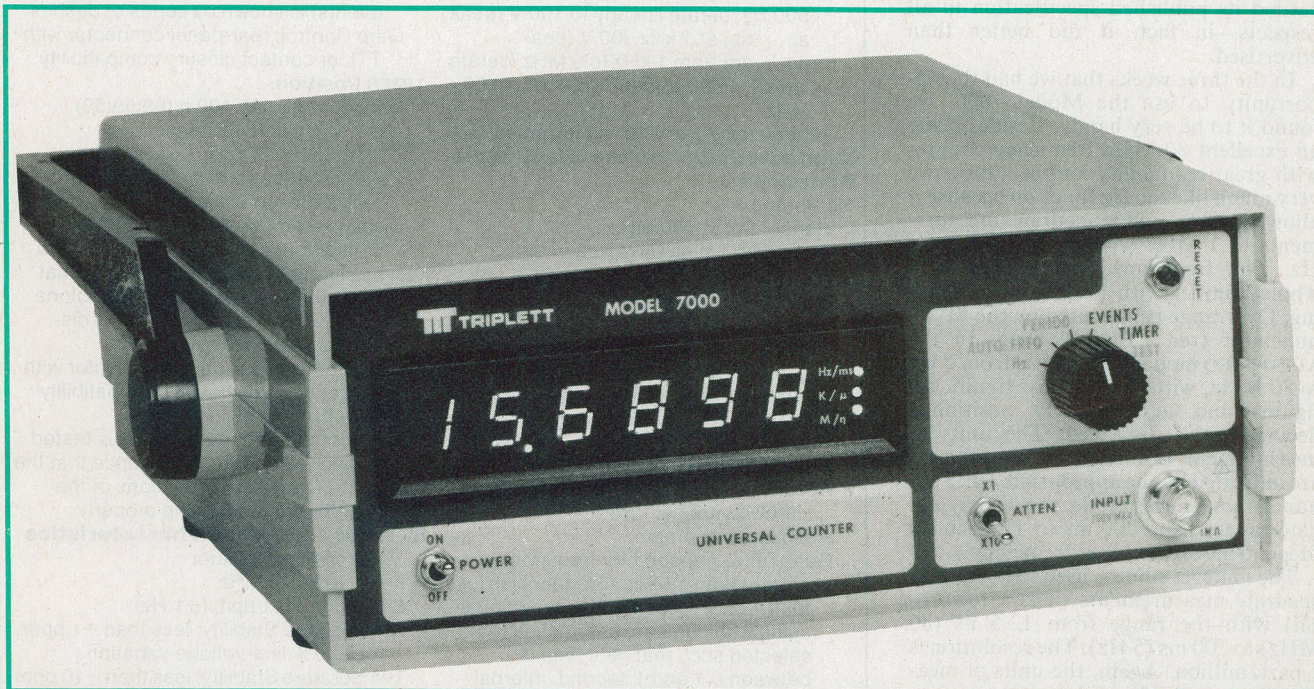

The Triplet Model 7000 Universal Counter is a microprocessor-based 5-Hz to 80-MHz autorange counter having six-digit resolution. It also has two accumulating-type functions—EVENTS, which can total to one-billion at rates to 80 MHz, and TIMER, which can display elapsed time in hours, minutes, and seconds for 100 hours with up to 100 μ s resolution. A built-in TEST function verifies proper operation.

Provisions are made for full external control. The six functions—HZ, AUTO FREQ, PERIOD, EVENTS, TIMER and TEST—are selected by a single rotary switch while LED annunciators indicate the function. Suggested retail is \$300.

General Description. The "heart" of the instrument is a 2650A 8-bit NMOS microprocessor that receives its operating instructions from a 2616 2K by 8 static MOS ROM, with temporary data stored within a 6810 128 by 8 MOS static RAM.

Other than the function selector rotary switch, the front panel contains the POWER on/off switch, an ATTENUATOR switch that can select either X1 or X10 attenuation of the selected input signal, a BNC IN-


PUT connector, and a RESET switch that sets the display to zero when using the TIMER or EVENTS function. This latter control has no effect on other functions.

The display consists of six digits of 0.43"-high, red, seven-segment LEDs, and three red LED function annunciators. These annunciators include Hz/ms, used for the AUTO FREQ and PERIOD functions to indicate that the display is Hz or milliseconds respectively; the K/ μ annunciator (also used in AUTO FREQ and PERIOD functions), indicating that

the display is kHz or microseconds respectively; and the M/n annunciator that, when used in the AUTO FREQ mode, indicates that the display is in MHz, and when in the PERIOD mode, indicates that the display is in nanoseconds. The M/n annunciator is also used as an overflow indicator in the Hz mode (indicating that the frequency is higher than 1 MHz). When operating in the EVENTS mode, the M indicator shows that the total number of events accumulated is the displayed number multiplied by one-million.

The counter's rear apron supports the EXTERNAL INPUT that requires a contact closure to ground or a TTL logical zero to stop the count accumulation in the EVENTS or TIMER modes, and does not affect the other functions. A time-base INT/EXT selector switch on the apron allows either the internal time base or an external 10-MHz time base to be employed. If used, the external time base is coupled via a BNC connector.

Physically, the instrument is $8\frac{1}{2}$ " W by $9\frac{9}{32}$ " D by $3\frac{7}{16}$ " H, and weighs $4\frac{1}{2}$ pounds. Four rubber feet make the Model 7000 skidproof when resting on a flat bench, and a variable-position tilt stand/carrying handle enables position-

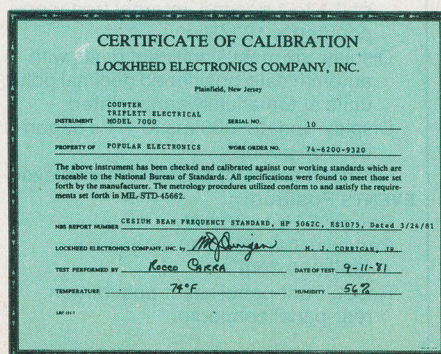

ing the display as required. A small pair of rubber feet are used to skidproof the counter when it is used in the tilted position. Complete electrical specifications are shown in the Table.

Comments. The Triplet Model 7000 Universal Counter was checked by the Instrumentation Measurement Laboratories of Lockheed Electronics Corporation (Plainfield, NJ) against standards traceable to the National Bureau of Standards. After the tests, Lockheed issued a certificate that the Model 7000 met or exceeded its published specification in all respects—in fact, it did better than advertised.

In the three weeks that we had the opportunity to use the Model 7000, we found it to be very handy. Besides being an excellent 80-MHz frequency counter with great readability and accuracy, we very much like the Hz function because it allowed us to make accurate measurements to 1 MHz with a resolution of 1 Hz. The frequency is displayed as a whole number with leading-zero blanking. Overrange is indicated by the M annunciator (red LED) glowing. In the AUTO FREQ mode, the range is from 5 Hz to 80 MHz, with the six most significant figures and automatically positioned decimal point displayed. The units of measurement (kilohertz or megahertz) are indicated by the appropriate LED annunciators. In this mode, the display update ranges from 200 ms to 1.1 seconds (dependent on the input frequency.)

The PERIOD mode is used to make very accurate measurements (it is a reciprocal) with the range from 12.5 ns (80 MHz) to 200 ms (5 Hz). The resolution is 1 part/million. Again, the units of measurement are indicated by appropriate LED annunciators.

We really had no use for the EVENTS mode. However, if you do have a need for this function, the Model 7000 can "count" to 999,999,000 events. When less than a million counts are registered, leading zeroes are blanked. A front-panel RESET pushbutton allows resetting to zero.

The TIMER mode was used to confirm the operation, and in several cases, enabled us to accurately recalibrate several mechanical, clockwork, and electronic timer circuits. Its range is from 100 μ s to 100 hours, so most timers can be directly calibrated and checked. The rear-apron gate control enabled us to check out TTL timers. (The manual spells out how this can be done.) In the TIMER mode, the display uses the six digits for hours, minutes, seconds, and fractional seconds with automatically positioned colons and decimal point.

We have used many frequency counters over the years, and the Model 7000 rates very high on our list. This is an excellent general-purpose instrument that will find wide favor with the hobbyist, technician, or engineer. With its broad range of uses, it would be a great addition to any test bench.

—Les Solomon

CIRCLE NO. 104 ON FREE INFORMATION CARD

MANUFACTURER'S SPECIFICATIONS

Input Characteristics

Impedance: 1 megohm shunted by 20 pF
Connector: BNC
Coupling: ac
Sine-wave Sensitivity: 30 mV rms from 5 Hz to 40 MHz, 50 mV rms max. at 80 MHz
Maximum Input: 200 V (peak ac + dc) to 500 Hz, derate linearly to 100 V (peak ac + dc) at 1 kHz, 100 V (peak ac + dc) from 1 kHz to 5 MHz, derate linearly to 30 V (peak ac + dc) at 80 MHz
Attenuator: X1 or X10, switch selectable

Characteristics of the Six Counter Functions

Hz Position:

Range: 5 Hz to 80 MHz
Accuracy: \pm time base accuracy ± 1 count
Resolution: 1 Hz
Gate Time: 1 second
Display: Frequency displayed as a whole number with leading zero blanking
Overrange: M annunciator glows when input exceeds 1 MHz

AUTO FREQ Position:

Range: 5 Hz to 80 MHz
Accuracy: \pm time base accuracy ± 1 LSD \pm trigger error
Resolution: to 1 ppm
Gate Time: 1 second for frequencies greater than 1 MHz. (Frequencies less than 1 MHz measured by period averaging with numbers automatically selected such that gate time is between 0.1 and 1 second. Internal frequency counted is 10 MHz.)
Display: six most-significant digits, automatically positioned decimal point; units of measurement automatically annunciated
Display Update: 200 ms to 1.1 s dependent on input frequency

PERIOD Position:

Range: 12.5 ns to 200 ms (5 Hz to 80 MHz)
Accuracy: \pm time base accuracy ± 1 LSD \pm trigger error
Resolution: to 1 ppm
Gate Time: periods less than 1 μ s (1 MHz) uses 1-s gate; periods greater than 1 μ s are averaged, with the averaged number sufficient for a gate time of 0.1 to 1 second. Internal frequency counted is 10 MHz.
Display: six most significant digits with automatically positioned decimal point; units automatically annunciated
Display Update: 200 ms to 1.1 s dependent on period
No Input: series of dashes are displayed

EVENTS Position:

Range: 5 Hz to 80 MHz
Capacity: 0 to 999,999 megaevents (999,999,000)
Reset: front-panel RESET pushbutton, rear-panel connector

Display: less than one-million events—whole number with leading zero blanking; greater than one-million events—six most-significant digits with automatically positioned decimal point. M annunciator indicates a multiplier of one million (X1,000,000). Overrange (greater than one billion events) is shown by series of dashes.
Gate Control: rear-panel connector with TTL or contact closure compatibility

TIMER Position:

Range: 100 μ s to 100 h (99:59:59)
Accuracy: \pm time base accuracy ± 1 LSD
Reset: front-panel RESET pushbutton, rear-panel connector
Display: six most-significant digits indicating hours, minutes, seconds, and fractional seconds in floating format with automatically positioned colons and decimal point. Overflow is displayed as a dashed line.
Gate Control: rear-panel connector with TTL or contact closure compatibility

TEST Position:

Microcomputer board circuitry is tested to give the operator assurance that the control and display sections of the counter are functioning properly.

Internal Time-Base Characteristics

Type: crystal oscillator
Frequency: 10 MHz
Stability: ± 0.1 ppm (± 1 Hz)
Line-Voltage Stability: less than ± 1 ppm for $\pm 10\%$ line-voltage variation
Temperature Stability: less than ± 10 ppm ($\pm 0.001\%$) from 0°C to 40°C ambient
Maximum Aging Rate: ± 10 ppm/year (± 1 ppm/month)
External Input: TTL level 50-ohm, 2.5-V peak-to-peak, switch selectable

TCXO Option

Frequency: 10 MHz
Temperature Stability: less than ± 1 ppm ($\pm 0.0001\%$) from 0°C to 40°C ambient
Maximum Aging Rate: ± 1 ppm/year
Warm-Up Time: none
External Output: 10 MHz, TTL level from TCXO available at rear-panel BNC

Display Characteristics

Visual: six digits (high-efficiency LED) 0.43" high, with decimal points and colons; three LED annunciators
Test: exercises the electronics and displays to verify correct operation (one of six counter functions)


General

Power: 105 to 130 V or 210 to 260 V, 50-60 Hz
Fuse: 1/4 A 3AG slo-blo for 120-V operation; 1/8 A 3AG slo-blo for 240-V operation
Power Cord: detachable three-wire
Handle: variable position and tilt stand
Lead Assemblies: coax cable, BNC at one end, alligator clips at the other, 36 in. long

COMPUTER SOURCES

Hardware

TRS-80 Graphics. The Model II Graphics Option (26-4104) organizes the Model II display into 640 horizontal by

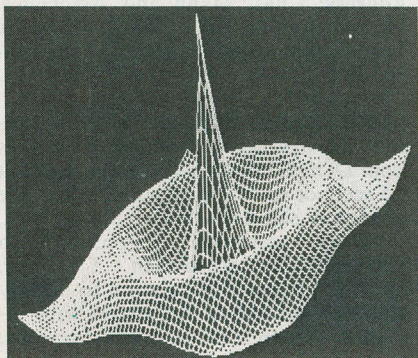

By Leslie Solomon
Technical Director

240 vertical pixels. Graphics BASIC adds eleven new commands to program lines, circles, arcs, and ellipses, "paint" selected screen areas, rotate, animate, store, and retrieve screen graphics. Since it adds an additional 32K character of independent memory, graphics can overlay text in the video memory. Automatic text reversal is provided when needed. \$499. Address: Radio Shack Computer Centers and stores.

Sinclair Expansion. Designed for the ZX80/ZX81/MicroAce, the Expansion Board is a "motherboard" that provides four 44-pin card connectors, room for Wire Wrap, gold-plated "fingers", voltage regulator for 5-volts at 3 amperes, while the ZX 16K RAM responds to its presence via RAM CS signals. Eight chips are needed, five for buffers, and three for decoding to determine direction

of bi-directional data bus buffers. The board connects to the Sinclair via gold-plated fingers. Bare board is \$33 (California residents please add \$1.95 tax). Kit is \$60 less voltage regulator. Address: Computer Continuum, 301 16th Ave., San Francisco, CA 94118 (Tel: 415-752-6294).

Cable Helper. The Match-Box Programmable Computer Cable System is a two-component cable system that can be used to fulfill up to 10,000 cable needs. Component A is a connector with a one-foot section of cable and Match Box attached, while Component B has a complementary Match Box that can be attached to a cable 100 feet long. The composite is programmed by moving pins within the Match Box to the correct sockets. For example, you can mate an RS232 with a 6-pin connector, or whatever. Depending on the number of conductors in the cable, prices range from \$19 to \$53. Address: ICO-Rally Corp., 2578 East Bayshore Rd., Palo Alto, CA 94303 (Tel: 415-856-9900).

Software Switching. The ASCII switch allows software controllable switching between any two peripherals using a single computer port, or allows two computers to share the same peripheral by software switching. 128 user-selectable ASCII codes can be used and the switch is controlled from DTE or DCE without the need for a null modem. Model A10

CALCULATOR SAVINGS



HP-11C Scientific	\$79.95	HP-85 Computer	\$199.00
HP-12C Financial	\$114.95	16K Memory/85	\$149.95
HP-15C Programmable	\$104.95	HP-87 Computer	\$179.00
HP-16C Hexadecimal	\$117.95	32K Memory/87	\$229.95
HP-32E Scientific	\$44.95	64K Memory/87	\$349.95
HP-34C Programmable	\$114.95	128K Memory/87	\$619.95
HP-41C Alpha Prog	\$184.95	CP/M Module/87	\$389.95
HP-41CV Full Memory	\$236.95	Series 80 Modem	\$319.95
Port-X-Tender to 10 pts	\$69.95	HP-125 Computer	\$199.00
82104A Card Reader	\$164.95	82901M Dual Disk Dr.	\$649.00
82143A Printer	\$284.95	82905B Dot Matrix Pr.	\$619.00
82153A Wand	\$92.95	7470A 2-pen Plotter	\$1199.00
82160A HP-IL Module	\$44.95	4.6MB Winchester Dr.	\$329.00
82161A Cassette Drive	\$419.95	9135A Winch/Floppy	\$429.00
82162A HP-IL Printer	\$369.95	2601A Daisywheel Pr.	\$299.00
82163A TV Interface	\$229.95		
82165A GPIB Interface	Call		
82180A Extnd Fncns	\$62.95		
82181A Extnd Memory	\$62.95		
82182A Time Module	\$62.95		

Call for Low Prices on all Accessories and Software

New! Texas Instruments TI-88 Programmable... Call for Price
TI-55-II... \$42.95 TI-99/4A (incl TV adapter)... \$299.95
TI-59... \$169.95 Extended BASIC Module... \$74.95
PC-100C... \$159.95 Call for low prices on all TI-99/4A products.
LCD Prgrm \$9.95 Get a \$20 rebate from TI with TI-59 purchase.

Sharp
PC-1211 Computer, free cassette interface... \$129.95
CE-122 Cassette Interface/Printer... \$9.95
PC-1500 Advanced Handheld Computer... \$249.95
CE-150 Cassette Intrfc/4-color Printer-Plotter... \$199.95
CE-151 4K Memory Expansion for PC-1500... \$64.95
CE-155 8K Memory Expansion for PC-1500... \$129.95

Casio
FX-602P Slim Programmable, 512 Steps... \$99.95
FX-702P Handheld Computer, 1680 Steps... \$159.95
FA-2 Cassette Interface for 602/702... \$42.95
FP-10 Printer for 602/702... \$79.95
MT-31 Compact Musical Keyboard... \$134.95
MT-40 Keyboard with Bass and Rhythms... \$159.95
CT-401 Home Entertainment Keyboard... \$449.95
CT-701 Advanced Electronic Organ with Memory... \$799.95
CT-1000P Polyphonic Synthesizer... \$79.95

Pearl-corder
S202 Microcassette Recorder, One Hour... \$79.95
SB01 Two-speed, Two Hour Recorder... \$99.95
SB01 Two-speed, Compact, Memory Rewind... \$139.95
X-01 Ultra-thin All Electronic... \$199.95

Olivetti
Praxis 35 Electronic Portable Typewriter... \$459.95

We accept cashiers' checks, money orders, VISA, and M/C. Personal checks take 5 weeks to clear. Add shipping: 1% of your order (\$3.95 minimum). East of Missp Rvd add \$1.50. CA res add 6%. Subject to availability. USA prices.

ORDER 800-421-5188 Outside
TOLL-FREE Information line (213) 633-3282 CA, AK, HI

tam's
INCORPORATED
Tam's Inc, Dept PE-8
14932 Garfield Ave.
Paramount, CA 90723
(213) 633-3282

CIRCLE NO. 45 ON FREE INFORMATION CARD

FOCUS

FOR ORDERS ONLY! TOLL - FREE (800)221-0828
BRING IN OR MAIL THIS ADV. WITH ORDER AND GET FREE GIFT

ATARI HEADQUARTERS



Computers

Atari 400 w/Basic Cart	\$359.95
Atari 800 w/Basic Cart	\$299.95
Commodore Vic 20, expands to 32K	\$229.95
Sharp PC-1211	\$129.95
W/Free Cassette Interface	\$129.95
Sharp PC-1500	\$229.95
HP 41C	\$229.95
TI-59	\$169.95

VIDEO

LARGEST AUTHORIZED SONY DEALER IN BROOKLYN



SONY

SONY SL-2000 Portable w/AC220	\$499.95
SONY SL-2500 Compact/Wireless	\$599.95
Remote	\$109.95
SONY SL-5000 Front Load Tube	\$699.95
SONY IVC-2200 Camera	\$799.95
W/Free Case	\$799.95
RCA VHS-500 Dolby Sound	\$1049.95
14 day	\$1049.95
RCA VHS-170 Portable 21 day/Wireless	\$599.95
Cable Ready	\$599.95
RCA CCR11 - Newcolor Tube	\$699.95
RCA CCR10/B-1 Zoom Color Camera	\$499.95
J.V.C. New HR-7500 Cable Ready/	\$799.95
Stereo/Wireless	\$799.95
J.V.C. HR-7500	\$899.95
J.V.C. HR-2500-Portable	\$1000.00
PAN PV-1275 New w/Search	\$499.95
PAN PV-1770 14 day/	\$649.95
Cable Ready/Wireless	\$649.95
PAN PK-700 Color Camera	\$429.95
PAN PK-750 Auto Focus	\$339.95
PAN PK-805 New Deluxe/	\$529.95
Full Feature	\$529.95
PAN PV-5500 Portable Wireless/	\$899.95
14 day/Cable Ready	\$899.95
PAN PV-5200 Portable w/T.T.	\$779.95
12 min. Remote	\$779.95

SONY Trinitron



WE HAVE ALL SONY PROFEEL T.V.s	
KV-4100 w/AM & FM/Tape/Monitor	\$449.95
KV-9400 9" Electronic Tuning	\$799.95
KV-1207 12"	\$419.95
KV-1540S 15" Remote Cable Ready	\$489.95
KV-1715S 17" Remote - Alpha	\$449.95
KV-1847S 18" Cable Ready/Remote	\$589.95
KV-2145S 21" Cable Ready/Remote	\$699.95
KV-2645S 26" Cable Ready/Remote	\$1199.95
KV-2648S "Stereo" 105 Cm. Black	\$950.00

CONSUMERS REMIND!

All our Walkmans include the one and only ORIGINAL HEADPHONES supplied by the factory at no additional cost!



SONY WALKMAN-1

SONY MDK-1L HEADPHONES	\$89.95
WALKMAN-2 w/MDK-4L15 Headphones	\$89.95
WALKMAN-2 Executive Black, Thin w/Sony	\$89.95
MDK-4L1 Headphones	\$89.95
TCS310 Stereo Record and Play w/Sony	\$89.95
MDK-1L1 Headphones	\$89.95
FM WALKMAN SRF-30W Stereo w/Sony	\$89.95
MDK-4L1 Headphones	\$89.95
ATWA CS-1 Stereo w/Record FM and HP-M5	\$131.95
Headphones	\$131.95
TOSHIBA KTR-2 Stereo, Record, FM w/HR-M2	\$99.95
Headphones	\$99.95

Video Accessories

Video Guard Stabilizer	\$40.95
Video Guard Stabilizer w/RF	\$49.95
Video Guard Stabilizer w/RF	\$49.95
Fader/New Improved Cancellation	\$89.95
VIDEO LIGHT - VIDEO CADDY	\$189.95
TRIPOD	\$189.95

LARGEST SELECTION OF FIRST RUN MOVIES IN STOCK AT DISCOUNT PRICES

For information and all N.Y. State orders, please dial (212)871-7600. All items subject to availability and price change. Mail and phone orders C.O.D. Master Charge, Visa O.K. Shipping extra. Everything Factory Fresh 10 day Money Back Guarantee (less shipping) FOCUS ELECTRONICS 4523 13th Ave. Brooklyn, NY 11219

CIRCLE NO. 18 ON FREE INFORMATION CARD

ELECTRONIC PROJECTS FOR MUSICIANS

Even if you don't know an ohm from a volt, Craig Anderton's newly revised and expanded book shows you how to build 27 accessories that enhance your sound and broaden your musical horizons.

If you're an old hand at musical electronics, you'll really appreciate that all of these processors, from Tube Sound Fuzz to Phase Shifter are compatible and work together without creating noise, signal loss, bandwidth compression or any of the other problems common to interconnecting effects from different manufacturers. There's even a complete chapter on how to modify and combine effects to produce your own custom pedal board.

Low cost project kits available from PAIA help make even your first exposure to electronics a pleasant, hassle-free experience and thanks to the sound sheet demo record bound into the book you know just how the completed device will sound before you even start.

CHARGE TO VISA OR MC TOLL-FREE
1-800-654-8657 9AM to 5PM CST MON-FRI

DIRECT INQUIRIES TO:

PAIA Electronics, Inc.

1020 W. Wilshire Blvd., Oklahoma City, OK 73116 (405)843-9626

I RUSH MY COPY OF "ELECTRONIC PROJECTS FOR MUSICIANS", \$14.95 plus \$1 postage enclosed.

I SEND FREE CATALOG OF OTHER PAIA PRODUCTS.

name _____

address _____

city _____ state _____ zip _____

PAIA Electronics, Inc.

Dept. 8P, 1020 W. Wilshire Blvd., Oklahoma City, OK 73116


CIRCLE NO. 37 ON FREE INFORMATION CARD

switches 10 lines, and Model A25 switches 24 lines of the RS232 interface. A10 is \$295, A25 is \$345. **Address:** Advanced Systems Concepts, Inc., POB Q, Altadena, CA 91001 (Tel: 213-684-5461 or 794-2308).

Apple to IBM. The 88CARD features a 8088 CPU and 64K-bytes of RAM, and when plugged into an Apple slot, makes the Apple "look" like an IBM Personal Computer. It is fully compatible with all Apple peripherals and allows selection between Apple and IBM operation. The coprocessor 88CARD uses the operating system designed for the IBM and this is included on the board. No external supplies or connections are required. \$899. **Address:** Coprocessors Inc., 50 West Brokaw Rd., Suite 64, San Jose, CA 95110 (Tel: 408-947-4616).

Data Encryption. DATALOK for the Apple II uses the powerful WD2001 DES (Data Encryption Standard) chip that uses a 56-bit key to create 72 quadrillion codes. No programming skill is required, just answering a couple of on-screen questions. Even an entire diskette can be protected, and unbootable. It requires an Apple II, 48K, one disk drive, DOS 3.2/3.3, and Applesoft BASIC. The Model ACS-1A costs \$349. **Address:** Atlantis Computers, 31-14 Broadway, Astoria, NY 11106 (Tel: 212-728-6700).

Acoustic Modem. The Phone Link Acoustic Modem is a low profile 300-baud instrument that operates in both the answer and originate mode. It inter-

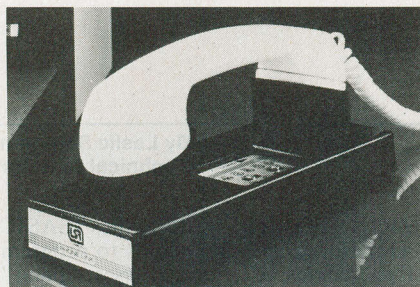

faces to the host computer via a conventional RS-232 port. LEDs are provided for receive/send data, power on, carrier detect, and self test. \$129. **Address:** U.S. Robotics Inc., 203 N. Wabash, Suite 1718, Chicago, IL 60601 (Tel: 312-346-5650).

IBM PC Hard Disks. The SCS Mini-Mega offers 5 and 10 megabyte configurations on a 5 1/4" disk subsystem with an optional one-megabyte 5 1/4" floppy for backup. The SCS Sabrina Series is a removable Winchester that offers 10 megabytes on an 8" removable Winchester cartridge along with a fixed disk capacity from 10 to 40 megabytes. CP/M-

86 is used. **Address:** Sante Clara Systems, 560 Division St., Campbell, CA 95008 (Tel: 408-374-6972).

Software

School Utility. The Grading Systems Program accommodates a variety of different grade calculations for schools and colleges to maintain grade and credit information. It allows preparation of report cards, file folder labels, synoptic records, grade labels, class rosters, and honor rolls. It comes with a light pen for easy entry by para-professionals. Requires an Apple II with 48K, single disk drive, and 80-column printer. \$299.95. **Address:** Chas. Mann and Associates, Microcomputer Div., 55722 Santa Fe Trail, Yucca Valley, CA 92284 (Tel: 714-365-9718).

Apple Display. Apple Flasher locates and displays Apple hi-res graphic files from DOS 3.3 disks, as pictures in about 1.5 seconds each. Display modes include single-key selection of any file on disk, continuous scan of all files on disk with new picture on screen each 1.5 seconds, carousel projector simulation to display screens from one or two drives with instant access to both next and previous,

More BLOCKBUSTER BARGAINS!!

Parallel, TTL Input I/O "Selectric"® TYPEWRITER / PRINTER

The manufacturer put 'em into storage to depreciate 'em... Now they're **FINALLY AVAILABLE!!** Removed from working systems, these fantastic machines have built-in driver and decoder circuitry and take TTL level, 6-bit character, plus 4-bit function input signals... Easily driven by most any micro. Use as a typewriter (with add'l 'repeat' circuitry) or as a KSR I/O printer or both. Requires 115, 60Hz for typewriter motor, 5 VDC for TTL and 24 VDC for solenoids. "Table Top" style case. Each "Selectric"™ I/O machine is complete and in operational condition! Includes schematics, data, case, platen and ribbon. (Type element not included.)



TESTED & OPERATIONAL!

New Type Element \$21.00ea. I/O Selectric **\$399.00ea.**
Add \$20 for Packaging and Handling - Pay Shipping on Delivery

SAVE!!! Untested version of the above, otherwise whole & complete. May require some service. **\$279.00ea.**

GE "Terminet 340" BAND LINE PRINTERS

Featuring:

- Over 80% Off Mfr.'s List Prices
- 230 to 340 Lines per Minute!
- Fully Formed Characters
- Parallel Input!
- Microcomputer Compatible
- 132 Columns, 64 Characters
- Nationwide Service from GE!
- Mfr.'s Price Over \$4K



Like New!

"CENTRONICS" I/O OPTION AVAILABLE FROM G.E.!!

These ultra-reliable, continuous-band Printers offer speeds of over 230 lines per minute, are fully operational and ready to use. Built and serviced nationwide by General Electric. Print band, schematics and data included.

115 VAC, 60HZ **\$795.00ea.**

Please Add \$20.00 for Packaging Shipped via Truck, Freight-Collect

We Offer New & Used FLOPPY DRIVES, DISK DRIVES, PRINTERS, & MORE at BARGAIN PRICES! Write or Call for Our Latest Flyer NOW!!!


"Selectric" is a registered trademark of IBM Corporation.

Computer Products & Peripherals Unlimited

WAREHOUSE:
18 Granite St. Haverhill, Mass. 01830
MAIL ORDERS:
Box 204, Newton, New Hampshire 03858
TELEPHONE ORDERS:
617/372-8637
Sorry, No Collect Calls
Mastercard & VISA Accepted

POWER-LINE FILTERS

These filters protect any sensitive electronic equipment from power line transient damage and radio frequency interference. Both models offer surge suppression for power line "spikes". RF interference is suppressed using both inductive and capacitive components. Ideal for computers, test equipment, or TV.

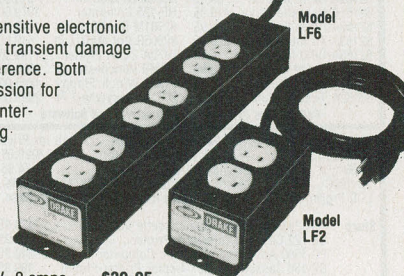

LF2—A duplex outlet, 120V, 8 amps ... **\$39.95**

LF6—Three separately filtered duplex outlets, 120V, total fused capacity 15 amps, power switch and indicator lamp **\$69.95**

Add **\$2.50** shipping and handling per order. Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax. Charge card buyers may call toll-free:



1-800-543-5612

In Ohio, or for information, call:
1-513-866-2421



R. L. DRAKE COMPANY

540 Richard Street, Miamisburg, Ohio 45342

INSTITUTIONAL AND DEALER INQUIRIES INVITED

and continuous display of all screens on one or two drives (30 pictures) with individual control of timing. Unlabelled disks may be searched for presence and names of hi-res screen files. Requires Apple II with ROM or Language Card, one or two drives, and DOS 3.3. \$34.50 plus \$1 handling. **Address:** Crow Ridge Associates, P.O. Box 90, New Scotland, NY 12127 (Tel: 518-765-3620).

ZX81 Utility. The Cassette I/O for ZX81 is a set of utility programs to selectively read or write strings and arrays to a cassette from the ZX81. The routines occupy approximately 500 bytes and require at least a 2K RAM. \$20. A memory modification to increase ZX81 memory to 2K bytes is also available for \$20. **Address:** Cosmonics, Box 10358, San Jose, CA 95157.

Crosswords. The Crossword Puzzle Maker for the Apple II uses hi-res graphics and automatically connects words, prints hard copy, is menu driven, stores 40 puzzles, and is very easy to use. Words can be supplied on any subject and the program will interconnect them (or save them if they cannot fit for the moment). Clues can be inserted as desired. Creates puzzles to 20 x 20 boxes. Requires Apple II, 48K, DOS 3.3 and can use any of 24 available printers for hard copy. \$49.95. **Address:** L&S Computerware, 1589 Fraser Drive, Sunnyvale, CA 94087 (Tel: 408-738-3416).

IBM Word Processor. WORD-II for the IBM Personal Computer accepts lines of text interspersed with lines of format control information and formats the text into a document. It also contains file/merge, auto insertion of date and user-specified constants, repeat printing compatibility with all DOS commands, and can send control characters to the printer. Requires IBM DOS, single disk drive, and printer. \$88. **Address:** Micro Architect Inc., 96 Dothan St., Arlington, MA 02174 (Tel: 617-643-4713).

Adventure Game. Available for the Heath/Zenith, Osborne, and other CP/M machines, this expanded version of the original adventure game explores the dangers, seeks the treasures, and solves the puzzles of the Colossal Cave. It is written in machine language and is enhanced. \$19.95 plus \$2 shipping (\$3 for 8") diskette. **Address:** Software Toolworks, 14478 Glorietta Drive, Sherman Oaks, CA 91423 (Tel: 213-986-4885).

Program Generator. Pearl III for CP/M and the Zenith Z89 and Z90 creates an application program in CBASIC with custom menus, data verified by type and length, custom reports, computational capabilities, file sorting ability, and the ability to post journal files to a master file. It is menu driven, and the output can be modified at the source code level. Comes on both 4 1/4" and 8" diskettes. \$650. **Address:** Zenith Data Systems, 1000 Milwaukee Ave., Glenview, IL 60025 (Tel: 312-391-8181).

Apple Graphics. The GPS (graphics processing system) for the Apple computer creates, manipulates, and edits graphics similar to a word processor with text. It features a grid that allows work to



be done to scale, and dimensions altered in proportion. It has six primary colors which can be mixed, two zoom features, 2D rotation to 360°, text capabilities, overlays which can be printed in different colors and graphics editing capability. It will work with paddles, joysticks, graphics tablets, and light pens. It will also access a 16K RAM card and is compatible with hi-res graphics. \$99.95 for professional, and \$59.95 for standard version. **Address:** Stoneware, Inc., 50 Belvedere St., San Francisco, CA 94901 (Tel: 415-454-6500).


Sinclair Disassembler. The ZX80 1K Disassembler for the 4K ROM ZX80, and the ZX81 and 8K ROM ZX80, require 1K of RAM and also includes a RAM memory test where the addresses of the failed bytes are displayed on the screen. \$9.95. **Address:** Lamo-Lem Laboratories, Box 2382, La Jolla, CA 92038.

TRS-80 Reference. Printed on 80-lb Beckett cover stock featuring eight folds and 16 panels, these handy 8 1/2" by 3 3/4" pocket reference cards cover memory map, eyeball graphics, math instructions, BASIC commands/functions/statements/special characters, move instructions, special keys, exchange instructions, BASIC and assembler messages and codes, branch instructions, data alteration, reserved words, I/O, ROM routines, complete character chart with graphics and space-compression codes, hex-dec chart, control code cross reference, complete assembler details, screen layout, and several more useful items. In essence, a heavy manual has been compressed to a few handy pages. Current issues cover all versions of the TRS-80 and color BASIC. Upcoming versions will cover Apple, Commodore, Heath, Sinclair, Atari, and the Z80 machines. **Address:** Nanos Systems Corp., POB 24344, Speedway, IN 46224 (Tel: 317-244-4078).

ZX81 Games. A number of games for the Sinclair ZX80/ZX81 including Super Invasion, Wallbusters, Cyborg Wars, Chess, Trek, etc., a Sinclair ZX81 BASIC Course, plus a number of programming and machine language guides are now available. **Address:** Softsync, Inc., POB 480, Murray Hill Stn, New York, NY 10156 (Tel: 212-685-2080).

WE TAKE YOU BY THE HAND!

You'll learn all about computers: how to build, program, service, even play TV games—without knowing the first thing about it!

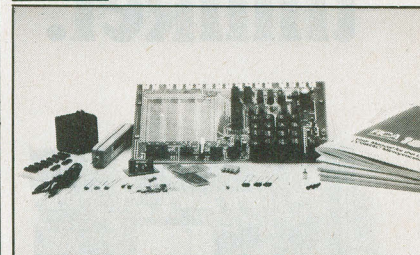

The New ELF II "Beginners" Package

Your own expandable micro-computer kit, 5 diagnostic analyzers plus circuit, programming, diagnostic manuals, even games you can play on TV. All only \$139.95.

Even if you don't know bits from bytes, now it's easy and inexpensive to build your own micro-computer, learn how it works, program it, service it—even play games with it on your TV! It's here in the New ELF II "Beginners" Package, only from Netronics. Only \$139.95. Here's the package: 1. your own micro-computer, the famous ELF II (featuring the RCA 1802 CMOS microprocessor) in kit form with step-by-step instructions on how to build it. Diagnostic Analyzers including 2. your own Logic Probe, 3. Pulse Catcher, 4. 8 bit Test Register, 5. Logic Analyzer, 6. Gate Arrays, 7. Non-Technical Manuals on how to use analyzers, how to get into the guts of the computer, what makes it tick, how to service it. 8. Sample Programs that teach you machine language programming plus how to correct or "debug" any programming mistakes. 9. TV games you can play. If your TV set has no video input, an optional converter (RF Modulator), is available. Then, once you've got this "Beginners" Package under your belt, keep on expanding your ELF II with additions like the Typewriter Key Board, added RAM, Full Basic Interpreter, Electric Mouth Talking Board, Color/Music, A/D-D/A Boards for Robot Controls and much, much more. We'll take you by the hand with the New ELF II "Beginners" Package. Only \$139.95. Mail or phone in your order today and begin.

Specifications: ELF II "Beginners" Package
The computer features an RCA CMOS 1802 8 bit microprocessor addressable to 64K bytes with DMA, interrupt, 18 Registers, ALU, 256 byte RAM expandable to 64K bytes. Professional Hex keyboard, fully decoded so there's no need to waste memory with keyboard scanning circuits, built-in power regulator, 5 slot plug-in expansion BUS (less connectors), stable crystal clock for timing purposes and a double sided, plated through PCB Board plus RCA 1861 video IC to display any segment of memory on a video monitor or TV screen along with the logic and support circuitry you need to learn every one of the RCA 1802's capabilities. The diagnostic analyzers aid in understanding and trouble shooting your ELF II, as well as other computer and microprocessor products.

Continental U.S.A. Credit Card Buyers Outside Connecticut
CALL TOLL FREE 800-243-7428

To Order From Connecticut or For Technical Assistance, Etc.,

Call (203) 354-9375

NETRONICS R&D LTD., Dept. PEB
333 Litchfield Road, New Milford, CT 06776

Please send the items checked below:

☐ ELF II "Beginners" Kit \$139.95
☐ RF Modulator \$ 8.95

Plus \$3.00 for postage, handling and insurance
(\$6.00 Canada)

Connecticut Residents add sales tax

Total Enclosed \$

☐ Personal Check ☐ Cashier's Check/Money Order
☐ Visa ☐ Master Charge (Bank No. _____)

Acct. No. _____

Signature _____ Exp. Date _____

Print


Name _____

Address _____

City _____

State _____ Zip _____

Hire a fast thinker.

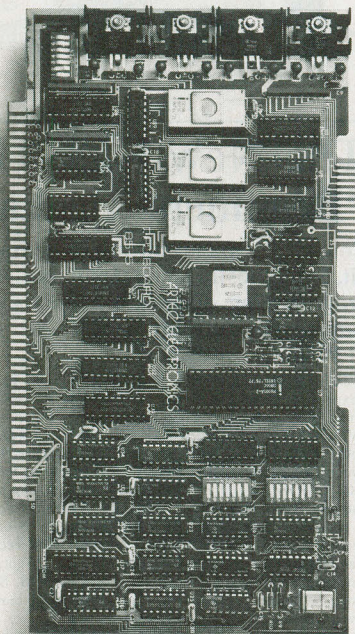


5 MHz CPU Card

■ Intel 8085A-2 microprocessor ■ Hardware floating point ■ Performs calculations six times faster than other CPUs ■ On-board monitor in PROM ■ 1K RAM scratch pad ■ Keyboard or RS232C terminal ■ Variable clock frequency

PRICE—\$450

(California residents add 6% sales tax)

Call or write Artec for details.



ARTEC ELECTRONICS, INC.

605 Old County Rd., San Carlos, CA 94070
Telephone (415) 592-2740

CIRCLE NO. 6 ON FREE INFORMATION CARD

SOLID-STATE DEVELOPMENTS

By Forrest M. Mims

PICs: Photonic Integrated Circuits

OPTOELECTRONICS and electro-optics are traditional terms for those areas of electronics that involve the emission and detection of light. Recently, the term *photonics* has emerged. Just as *electronics* is derived from electron, *photonics* is derived from photon.

Photonics actually had its origin in the final quarter of the last century with the invention in 1873 of the selenium light detector. By 1880, Alexander Graham Bell and Sumner Tainter had used selenium cells of their own design and construction to become the first people to send their voices over a modulated beam of light. In 1907, the light-emitting properties of silicon carbide were discovered by Captain H.J. Round.

Optocouplers and optoisolators made by mounting an LED chip and photodetector within a common package have been available for nearly twenty years. In the early 1960's, Texas Instruments introduced an optically coupled amplifier consisting of an LED mounted atop a silicon chip that included an integrated photodiode and amplifier.

Photonics today has received enormous stimulus from advances in optical-fiber communications, video-data storage and retrieval, and the prospect of computers that depend on photons rather than electrons for their operation. These and other applications for photonics have generated considerable interest in the fabrication of miniature pho-

tonic circuits on semiconductor chips.

Though integrated photonic circuits are in an early stage of development when compared to integrated electronic circuits, several important advances have been made in new and exotic semiconductor light sources and detectors, thin film waveguides and optical components, and various kinds of light-wave switches and deflectors. The ultimate goal of photonic researchers is to combine devices such as these to provide circuits that process photons much like conventional circuits process electrons. In this column we'll refer to such circuits as *photonic integrated circuits* or simply *PICs*.

Light Sources for Photonic IC's. Various kinds of miniature modules containing an LED or diode laser together with appropriate drive circuitry have been available for more than a decade. Like optoisolators, they are *hybrid* photonic circuits wherein the light source and the driver chip are attached separately to a common substrate.

Several kinds of laser and LED chips with on-chip driver circuits have been developed in recent years. However, monolithic integration of a source and its drive circuits on the same chip is not nearly so far along as the development of chips that contain both detectors and amplifiers.

Probably the most important PIC light sources are injection lasers that do *not* re-

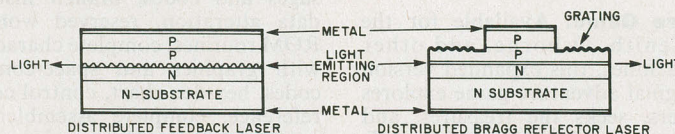


Fig. 1. Two kinds of semiconductor lasers suitable for photonic integrated circuits.

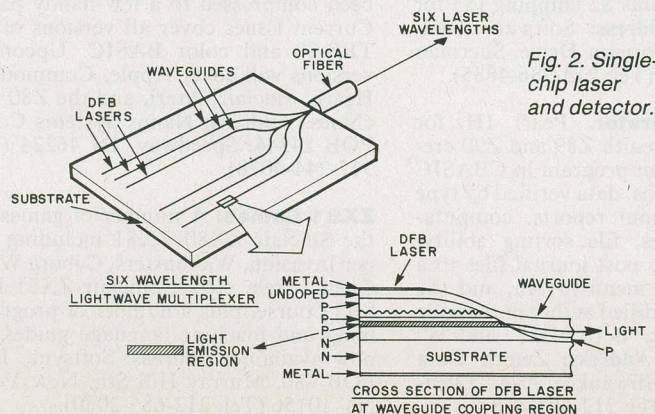


Fig. 2. Single-chip laser and detector.

solid-state developments

quire the two end mirrors of conventional lasers. Normally the end mirrors are produced by cleaving the semiconductor from which the laser is made along its crystalline planes to produce perfectly flat and parallel reflecting facets. This procedure is not always possible when attempting to integrate a laser onto a chip along with other components.

One solution is a laser whose junction region curves back toward one side of the

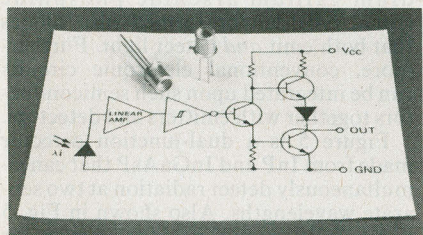


Fig. 3. TRW-Opton single-chip receivers.

chip to form a semi-circle. Cleaving a single side of the chip allows each end of the curved junction to share the same reflector. Although some light can be extracted from the central portion of this strange laser, most exits through the single end mirror and is unavailable for use inside the chip.

A better solution is to eliminate the end mirrors entirely and obtain the optical feedback necessary to sustain laser action by means of periodic grooves transverse to the plane of the junction. The corrugated grooves are formed by chemical etching or ion milling prior to the deposition of the crystal layers that complete the laser. At this stage, the laser chip resembles a microscopic old-fashioned washboard when viewed from above.

This light emitter, which is shown in Fig. 1, is called a *distributed feedback* (DFB) laser. In operation, each groove reflects back along the plane of the junction a small portion of the light emitted in the junction region. A large number of grooves insures sufficient feedback to sustain laser action.

A modification of the DFB laser is the *distributed Bragg reflector* (DBR) laser, also shown in Fig. 1. In this laser the corrugations are at either end of the central portion of the chip. Like the DFB laser, the DBR laser provides a very narrow spectral output and a structure that can be monolithically integrated onto the same substrate as other components and microscopic waveguides.

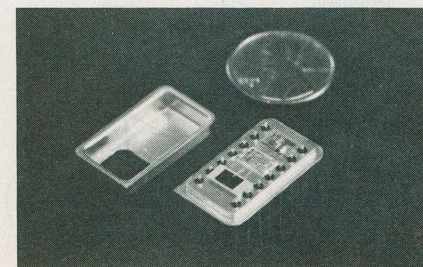


Fig. 4. Hybrid receiver made by Meret, Inc.

AUGUST 1982

PROTECT YOUR VALUABLE RECORD COLLECTION

REPLACE YOUR STYLUS -NOT YOUR RECORDS-

Even a precision-crafted diamond stylus (needle) will eventually become worn, and a worn stylus will degrade your hi-fi system's sound quality... it may actually ruin precious records in just a single play! Have your stylus checked at least once a year and replaced if necessary. Insist on the name "Shure" on your replacement stylus and be assured of getting the full listening enjoyment your Shure phono cartridge was designed to produce.

SHURE

Shure Brothers Inc., 222 Hartrey Ave., Evanston, IL 60204

CIRCLE NO. 42 ON FREE INFORMATION CARD

WE'LL LURE YOU WITH OUR PRICES... AND WIN YOU WITH OUR SERVICE

ORDER TOLL FREE (800) 221-8180
IN NEW YORK (212) 732-8600

BLANK TAPES

VIDEO	
MINIMUM ORDER 12 TAPES	
ANY BRAND T-120 (except HCL)	\$11.95
ANY BRAND L-500 (except HCL)	\$19.95
ANY BRAND L-750 (except HCL)	\$11.95
ANY BRAND L-850 (except HCL)	\$14.95
ANY BRAND T-160 (except HCL)	\$19.95
ANY BRAND HCL T-120	\$12.95
ANY BRAND HCL L-500	\$12.95
ANY BRAND HCL L-750	\$14.95

WE CARRY TAPES BY: MAXELL, TDK, SONY, SCOTCH, FUJI, MEMOREX, BASF, AMPEX, JVC, PANASONIC, ZENITH

SPECIALS

SCOTCH T-120	\$11.49
AMPEX T-120	\$10.95
SCOTCH L-500	\$9.49
BASF L-500	\$9.49

AUDIO

MINIMUM ORDER 12 TAPES	
MAXELL UDXL1 or UDXL1 C-90	\$12.95
TDK SA C-90	\$12.95
TDK SA C-90	\$12.95
SONY UCX5 C-90	\$12.95

ADDITIONAL 5% DISCOUNT ON 100 OR MORE ASSORTED TAPES

VIDEO & TV'S

ATARI 400 HOME COMPUTER ONLY

\$329

PANASONIC PV-1275 VHS RECORDER ONLY

\$499

• HOME VIDEO RECORDERS

JVC HR-7500 (VHS)	\$599	SONY KV-2000 (5" Screen)	\$448
JVC HR-7600 (VHS)	\$599	SONY KV-2100 (5" Screen)	\$425
JVC HR-7700 (VHS)	\$599	SONY KV-2110 (5" Screen)	\$425
JVC HR-7800 (VHS)	\$599	SONY KV-2120 (5" Screen)	\$425
JVC HR-7900 (VHS)	\$599	SONY KV-2130 (5" Screen)	\$425
JVC HR-8000 (VHS)	\$599	SONY KV-2140 (5" Screen)	\$425
JVC HR-8100 (VHS)	\$599	SONY KV-2150 (5" Screen)	\$425
JVC HR-8200 (VHS)	\$599	SONY KV-2160 (5" Screen)	\$425
JVC HR-8300 (VHS)	\$599	SONY KV-2170 (5" Screen)	\$425
JVC HR-8400 (VHS)	\$599	SONY KV-2180 (5" Screen)	\$425
JVC HR-8500 (VHS)	\$599	SONY KV-2190 (5" Screen)	\$425
JVC HR-8600 (VHS)	\$599	SONY KV-2200 (5" Screen)	\$425
JVC HR-8700 (VHS)	\$599	SONY KV-2210 (5" Screen)	\$425
JVC HR-8800 (VHS)	\$599	SONY KV-2220 (5" Screen)	\$425
JVC HR-8900 (VHS)	\$599	SONY KV-2230 (5" Screen)	\$425
JVC HR-9000 (VHS)	\$599	SONY KV-2240 (5" Screen)	\$425
JVC HR-9100 (VHS)	\$599	SONY KV-2250 (5" Screen)	\$425
JVC HR-9200 (VHS)	\$599	SONY KV-2260 (5" Screen)	\$425
JVC HR-9300 (VHS)	\$599	SONY KV-2270 (5" Screen)	\$425
JVC HR-9400 (VHS)	\$599	SONY KV-2280 (5" Screen)	\$425
JVC HR-9500 (VHS)	\$599	SONY KV-2290 (5" Screen)	\$425
JVC HR-9600 (VHS)	\$599	SONY KV-2300 (5" Screen)	\$425
JVC HR-9700 (VHS)	\$599	SONY KV-2310 (5" Screen)	\$425
JVC HR-9800 (VHS)	\$599	SONY KV-2320 (5" Screen)	\$425
JVC HR-9900 (VHS)	\$599	SONY KV-2330 (5" Screen)	\$425
JVC HR-10000 (VHS)	\$599	SONY KV-2340 (5" Screen)	\$425
JVC HR-10100 (VHS)	\$599	SONY KV-2350 (5" Screen)	\$425
JVC HR-10200 (VHS)	\$599	SONY KV-2360 (5" Screen)	\$425
JVC HR-10300 (VHS)	\$599	SONY KV-2370 (5" Screen)	\$425
JVC HR-10400 (VHS)	\$599	SONY KV-2380 (5" Screen)	\$425
JVC HR-10500 (VHS)	\$599	SONY KV-2390 (5" Screen)	\$425
JVC HR-10600 (VHS)	\$599	SONY KV-2400 (5" Screen)	\$425
JVC HR-10700 (VHS)	\$599	SONY KV-2410 (5" Screen)	\$425
JVC HR-10800 (VHS)	\$599	SONY KV-2420 (5" Screen)	\$425
JVC HR-10900 (VHS)	\$599	SONY KV-2430 (5" Screen)	\$425
JVC HR-11000 (VHS)	\$599	SONY KV-2440 (5" Screen)	\$425
JVC HR-11100 (VHS)	\$599	SONY KV-2450 (5" Screen)	\$425
JVC HR-11200 (VHS)	\$599	SONY KV-2460 (5" Screen)	\$425
JVC HR-11300 (VHS)	\$599	SONY KV-2470 (5" Screen)	\$425
JVC HR-11400 (VHS)	\$599	SONY KV-2480 (5" Screen)	\$425
JVC HR-11500 (VHS)	\$599	SONY KV-2490 (5" Screen)	\$425
JVC HR-11600 (VHS)	\$599	SONY KV-2500 (5" Screen)	\$425
JVC HR-11700 (VHS)	\$599	SONY KV-2510 (5" Screen)	\$425
JVC HR-11800 (VHS)	\$599	SONY KV-2520 (5" Screen)	\$425
JVC HR-11900 (VHS)	\$599	SONY KV-2530 (5" Screen)	\$425
JVC HR-12000 (VHS)	\$599	SONY KV-2540 (5" Screen)	\$425
JVC HR-12100 (VHS)	\$599	SONY KV-2550 (5" Screen)	\$425
JVC HR-12200 (VHS)	\$599	SONY KV-2560 (5" Screen)	\$425
JVC HR-12300 (VHS)	\$599	SONY KV-2570 (5" Screen)	\$425
JVC HR-12400 (VHS)	\$599	SONY KV-2580 (5" Screen)	\$425
JVC HR-12500 (VHS)	\$599	SONY KV-2590 (5" Screen)	\$425
JVC HR-12600 (VHS)	\$599	SONY KV-2600 (5" Screen)	\$425
JVC HR-12700 (VHS)	\$599	SONY KV-2610 (5" Screen)	\$425
JVC HR-12800 (VHS)	\$599	SONY KV-2620 (5" Screen)	\$425
JVC HR-12900 (VHS)	\$599	SONY KV-2630 (5" Screen)	\$425
JVC HR-13000 (VHS)	\$599	SONY KV-2640 (5" Screen)	\$425
JVC HR-13100 (VHS)	\$599	SONY KV-2650 (5" Screen)	\$425
JVC HR-13200 (VHS)	\$599	SONY KV-2660 (5" Screen)	\$425
JVC HR-13300 (VHS)	\$599	SONY KV-2670 (5" Screen)	\$425
JVC HR-13400 (VHS)	\$599	SONY KV-2680 (5" Screen)	\$425
JVC HR-13500 (VHS)	\$599	SONY KV-2690 (5" Screen)	\$425
JVC HR-13600 (VHS)	\$599	SONY KV-2700 (5" Screen)	\$425
JVC HR-13700 (VHS)	\$599	SONY KV-2710 (5" Screen)	\$425
JVC HR-13800 (VHS)	\$599	SONY KV-2720 (5" Screen)	\$425
JVC HR-13900 (VHS)	\$599	SONY KV-2730 (5" Screen)	\$425
JVC HR-14000 (VHS)	\$599	SONY KV-2740 (5" Screen)	\$425
JVC HR-14100 (VHS)	\$599	SONY KV-2750 (5" Screen)	\$425
JVC HR-14200 (VHS)	\$599	SONY KV-2760 (5" Screen)	\$425
JVC HR-14300 (VHS)	\$599	SONY KV-2770 (5" Screen)	\$425
JVC HR-14400 (VHS)	\$599	SONY KV-2780 (5" Screen)	\$425
JVC HR-14500 (VHS)	\$599	SONY KV-2790 (5" Screen)	\$425
JVC HR-14600 (VHS)	\$599	SONY KV-2800 (5" Screen)	\$425
JVC HR-14700 (VHS)	\$599	SONY KV-2810 (5" Screen)	\$425
JVC HR-14800 (VHS)	\$599	SONY KV-2820 (5" Screen)	\$425
JVC HR-14900 (VHS)	\$599	SONY KV-2830 (5" Screen)	\$425
JVC HR-15000 (VHS)	\$599	SONY KV-2840 (5" Screen)	\$425
JVC HR-15100 (VHS)	\$599	SONY KV-2850 (5" Screen)	\$425
JVC HR-15200 (VHS)	\$599	SONY KV-2860 (5" Screen)	\$425
JVC HR-15300 (VHS)	\$599	SONY KV-2870 (5" Screen)	\$425
JVC HR-15400 (VHS)	\$599	SONY KV-2880 (5" Screen)	\$425
JVC HR-15500 (VHS)	\$599	SONY KV-2890 (5" Screen)	\$425
JVC HR-15600 (VHS)	\$599	SONY KV-2900 (5" Screen)	\$425
JVC HR-15700 (VHS)	\$599	SONY KV-2910 (5" Screen)	\$425
JVC HR-15800 (VHS)	\$599	SONY KV-2920 (5" Screen)	\$425
JVC HR-15900 (VHS)	\$599	SONY KV-2930 (5" Screen)	\$425
JVC HR-16000 (VHS)	\$599	SONY KV-2940 (5" Screen)	\$425
JVC HR-16100 (VHS)	\$599	SONY KV-2950 (5" Screen)	\$425
JVC HR-16200 (VHS)	\$599	SONY KV-2960 (5" Screen)	\$425
JVC HR-16300 (VHS)	\$599	SONY KV-2970 (5" Screen)	\$425
JVC HR-16400 (VHS)	\$599	SONY KV-2980 (5" Screen)	\$425
JVC HR-16500 (VHS)	\$599	SONY KV-2990 (5" Screen)	\$425
JVC HR-16600 (VHS)	\$599	SONY KV-3000 (5" Screen)	\$425
JVC HR-16700 (VHS)	\$599	SONY KV-3010 (5" Screen)	\$425
JVC HR-16800 (VHS)	\$599	SONY KV-3020 (5" Screen)	\$425
JVC HR-16900 (VHS)	\$599	SONY KV-3030 (5" Screen)	\$425
JVC HR-17000 (VHS)	\$599	SONY KV-3040 (5" Screen)	\$425
JVC HR-17100 (VHS)	\$599	SONY KV-3050 (5" Screen)	\$425
JVC HR-17200 (VHS)	\$599	SONY KV-3060 (5" Screen)	\$425
JVC HR-17300 (VHS)	\$599	SONY KV-3070 (5" Screen)	\$425
JVC HR-17400 (VHS)	\$599	SONY KV-3080 (5" Screen)	\$425
JVC HR-17500 (VHS)	\$599	SONY KV-3090 (5" Screen)	\$425
JVC HR-17600 (VHS)	\$599	SONY KV-3100 (5" Screen)	\$425
JVC HR-17700 (VHS)	\$599	SONY KV-3110 (5" Screen)	\$425
JVC HR-17800 (VHS)	\$599	SONY KV-3120 (5" Screen)	\$425
JVC HR-17900 (VHS)	\$599	SONY KV-3130 (5" Screen)	\$425
JVC HR-18000 (VHS)	\$599	SONY KV-3140 (5" Screen)	\$425
JVC HR-18100 (VHS)	\$599	SONY KV-3150 (5" Screen)	\$425
JVC HR-18200 (VHS)	\$599	SONY KV-3160 (5" Screen)	\$425
JVC HR-18300 (VHS)	\$599	SONY KV-3170 (5" Screen)	\$425
JVC HR-18400 (VHS)	\$599	SONY KV-3180 (5" Screen)	\$425
JVC HR-18500 (VHS)	\$599	SONY KV-3190 (5" Screen)	\$425
JVC HR-18600 (VHS)	\$599	SONY KV-3200 (5" Screen)	\$425
JVC HR-18700 (VHS)	\$599	SONY KV-3210 (5" Screen)	\$425
JVC HR-18800 (VHS)	\$599	SONY KV-3220 (5" Screen)	\$425
JVC HR-18900 (VHS)	\$599	SONY KV-3230 (5" Screen)	\$425
JVC HR-19000 (VHS)	\$599	SONY KV-3240 (5" Screen)	\$425
JVC HR-19100 (VHS)	\$599	SONY KV-3250 (5" Screen)	\$425
JVC HR-19200 (VHS)	\$599	SONY KV-3260 (5" Screen)	\$425
JVC HR-19300 (VHS)	\$599	SONY KV-3270 (5" Screen)	\$425
JVC HR-19400 (VHS)	\$599	SONY KV-3280 (5" Screen)	\$425
JVC HR-19500 (VHS)	\$599	SONY KV-3290 (5" Screen)	\$425
JVC HR-19600 (VHS)	\$599	SONY KV-3300 (5" Screen)	\$425
JVC HR-19700 (VHS)	\$599	SONY KV-3310 (5" Screen)	\$425
JVC HR-19800 (VHS)	\$599	SONY KV-3320 (5" Screen)	\$425
JVC HR-19900 (VHS)	\$599	SONY KV-3330 (5" Screen)	\$425
JVC HR-20000 (VHS)	\$599	SONY KV-3340 (5" Screen)	\$425
JVC HR-20100 (VHS)	\$599	SONY KV-3350 (5" Screen)	\$425
JVC HR-20200 (VHS)	\$599	SONY KV-3360 (5" Screen)	\$425
JVC HR-20300 (VHS)	\$599	SONY KV-3370 (5" Screen)	\$425
JVC HR-20400 (VHS)	\$599	SONY KV-3380 (5" Screen)	\$425
JVC HR-20500 (VHS)	\$599	SONY KV-3390 (5" Screen)	\$425
JVC HR-20600 (VHS)	\$599	SONY KV-3400 (5" Screen)	\$425
JVC HR-20700 (VHS)	\$599	SONY KV-3410 (5" Screen)	\$425
JVC HR-20800 (VHS)	\$599	SONY KV-3420 (5" Screen)	\$425
JVC HR-20900 (VHS)	\$599	SONY KV-3430 (5" Screen)	\$425
JVC HR-21000 (VHS)	\$599	SONY KV-3440 (5" Screen)	\$425
JVC HR-21100 (VHS)	\$599	SONY KV-3450 (5" Screen)	\$425
JVC HR-21200 (VHS)	\$599	SONY KV-3460 (5" Screen)	\$425
JVC HR-21300 (VHS)	\$599	SONY KV-3470 (5" Screen)	\$425
JVC HR-21400 (VHS)	\$599	SONY KV-3480 (5" Screen)	\$425
JVC HR-21500 (VHS)	\$599	SONY KV-3490 (5" Screen)	\$425
JVC HR-21600 (VHS)	\$599	SONY KV-3500 (5" Screen)	\$425
JVC HR-21700 (VHS)	\$599	SONY KV-3510 (5" Screen)	\$425
JVC HR-21800 (VHS)	\$599	SONY KV-3520 (5" Screen)	\$425
JVC HR-21900 (VHS)	\$599	SONY KV-3530 (5" Screen)	\$425
JVC HR-22000 (VHS)	\$599	SONY KV-3540 (5" Screen)	\$425
JVC HR-22100 (VHS)	\$599	SONY KV-3550 (5" Screen)	\$425
JVC HR-22200 (VHS)	\$599	SONY KV-3560 (5" Screen)	\$425
JVC HR-22300 (VHS)	\$599	SONY KV-3570 (5" Screen)	\$425
JVC HR-22400 (VHS)	\$599	SONY KV-3580 (5" Screen)	\$425
JVC HR-22500 (VHS)	\$599	SONY KV-3590 (5" Screen)	\$425
JVC HR-22600 (VHS)	\$599	SONY KV-3600 (5" Screen)	\$425
JVC HR-22700 (VHS)	\$599	SONY KV-3610 (5" Screen)	\$425
JVC HR-22800 (VHS)	\$599	SONY KV-3620 (5" Screen)	\$425
JVC HR-22900 (VHS)	\$599	SONY KV-3630 (5" Screen)	\$425
JVC HR-23000 (VHS)	\$599	SONY KV-3640 (5" Screen)	\$425
JVC HR-23100 (VHS)	\$599	SONY KV-3650 (5" Screen)	\$425
JVC HR-23200 (VHS)	\$599	SONY KV-3660 (5" Screen)	\$425
JVC HR-23300 (VHS)	\$599	SONY KV-3670 (5" Screen)	\$425
JVC HR-23400 (VHS)	\$599	SONY KV-3680 (5" Screen)	\$425
JVC HR-23500 (VHS)	\$599	SONY KV-3690 (5" Screen)	\$425
JVC HR-23600 (VHS)	\$599	SONY KV-3700 (5" Screen)	\$425
JVC HR-23700 (VHS)	\$599	SONY KV-3710 (5" Screen)	\$425
JVC HR-23800 (VHS)	\$599	SONY KV-3720 (5" Screen)	\$425
JVC HR-23900 (VHS)	\$599	SONY KV-3730 (5" Screen)	\$425
JVC HR-24000 (VHS)	\$599	SONY KV-3740 (5" Screen)	\$425
JVC HR-24100 (VHS)	\$599	SONY KV-3750 (5" Screen)	\$425
JVC HR-24200 (VHS)	\$599		

QUALITY parts at DISCOUNT PRICES!

MINI BSR

AUTOMATIC RECORD CHANGER



\$17.50 each

- * B.S.R. MODEL C136R/C/3
- * PLAYS 33/45/78 RECORDS
- * MINI SIZE: 8 1/4" X 12"

INCLUDES DUST COVER AND PLASTIC CASE (NOT PICTURED) WITH FRONT CUT OUT TO FIT STEREO UNIT (NOT INCLUDED).

COMPUTER GRADE CAPACITOR

1700 mfd. 150VDC \$2.00
2 1/2" DIA X 4 3/4" HIGH

3,600 mfd. 40VDC \$1.00
1 3/8" DIA. X 3" HI

6,400 mfd. 60VDC \$2.50
1 3/8" DIA X 4 1/4"

12,000 mfd. 40 VDC \$3.00
2" DIA X 4 1/4" HIGH

18,000 mfd. 75 VDC \$4.00
2 1/2" DIA X 4 1/2" HIGH

22,000 mfd. 15VDC \$2.00
2" DIA X 2 1/2" HIGH

22,000 mfd. 40VDC \$3.00
2" DIA. X 6" HIGH

25,000 mfd. 75 VDC \$4.50
3" DIA X 4 3/8" HIGH

45,000 mfd. 25 VDC \$3.50
2" DIA. X 4" HIGH

72,000 mfd. 15VDC \$3.50
2" DIA. X 4" HIGH

185,000 mfd. 6 V \$1.50
2 1/2" DIA X 4 1/2" HIGH

CLAMPS TO FIT CAPACITORS 50c ea.

ULTRAVIOLET

G.E. # F6T5BL \$2.50 each

TRANSFORMERS

120 volt
primaries



5.6 VOLTS at 750 MA \$3.00

6 VOLTS at 150 MA \$1.25

12 V.C.T. at 500 MA \$2.50

16.5 V. at 3 AMPS \$6.50

18 VOLTS at 350 MA \$2.00

18 VOLTS at 1 AMP \$4.50

18 V.C.T. at 2 AMP \$5.50

25.2 V.C.T. at 2.5 AMP \$5.50

35 V.C.T. at 1 AMP \$3.50

42 V.C.T. at 1.2 AMP \$4.50

65 V.C.T. at 2 AMP \$5.50

VARACTOR DIODES

BB-103 3 FOR \$1.00

100 FOR \$30.00

MV2205 3 FOR \$1.00

100 FOR \$30.00

8' LINE CORD


18 - 3 JUT

ROUND GRAY

\$2.00 EACH 10 FOR \$18.50

SEND FOR OUR NEW
Free! 40 PAGE CATALOG Free!

4 CHANNEL 8 TRACK HOME UNIT



BRAND NEW UNITS...
ASSEMBLY INCLUDES;
TAPE HEAD, MOTOR BELT,
110VAC MOTOR, PRE-AMP,
LIGHTS, SWITCHES,
SOLENOID AND OTHER
USEFUL PARTS...
AN EXCEPTIONAL BUY!

\$7.25 PER ASSEMBLY

JOYSTICK

PRECISION
DEVICE...

CONTAINS 4

50K CENTER

TAPPED ALPS

POTS. \$4.75 ea



BLACK PLASTIC CASE

PAC-TEC
SERIES C

BLACK PLASTIC ENCLOSURE

ADJUSTABLE HEIGHT FROM

1.63" TO 2.93"; WIDTH

6.85"; DEPTH 8". BUILT-

IN STAND OFFS FOR P.C.

BOARDS..FRONT AND BACK

PANELS NOT INCLUDED..

\$5.25 PER CASE

MITSUMI

MODEL UES-A55F

VARACTOR UHF

TUNER

FREQ. RANGE

470 - 889 MHz

ANTENNA INPUT

300 OHMS

\$25.00 each

10 for \$220.00

8-TRACK AND CASSETTE

TAPE PLAYER / RECORDER



COMPLETE CHASSIS
READY TO INSTALL
INTO YOUR CABINET

\$20.00 PER UNIT.

BRAND NEW, COMPLETELY FUNCTIONAL TAPE DECKS
* RECORD AND PLAY 8 TRACK OR CASSETTE TAPES
* L.E.D. FUNCTION INDICATORS
* COMPLETE SCHEMATIC AND HOOK UP DIAGRAM
* REQUIRES 12.6 - 15 VDC POWER SUPPLY

ALL ELECTRONICS CORP.

905 S. Vermont Ave.
P.O. BOX 20406
Los Angeles, Calif. 90006

TOLL FREE ORDER NO.
800-826-5432
AK-HI-CA (213)380-8000

Mon. - Fri. Saturday
9 AM - 5 PM 10 AM - 3 PM

TERMS
• Quantities Limited
• Min. Order \$10.00
• Add \$2.50
• Shipping USA
• Calif. Res. Add 6%
• Prompt Shipping
NO COD!

solid-state developments

A remarkable example of the integration of multiple DFB lasers onto the same substrate is the six-laser multiplexer PIC shown in Fig. 2. Developed by scientists at Hitachi Laboratories in Japan, this PIC pairs six lasers with six waveguides that merge into a common exit port for coupling into an optical fiber. All lasers and their matching waveguides are formed from gallium arsenide (GaAs) and gallium aluminum arsenide (GaAlAs) layers deposited over a common GaAs substrate.

The frequency of the lightwaves emitted by a DFB laser is a function of the distance between grooves in the corrugations along the junction region. Therefore, by altering slightly the dimensions between the corrugations of the individual lasers, it was possible for the Hitachi scientists to precisely tune the lasers to six separate wavelengths between about 891 and 905 nanometers.

Other kinds of multiple wavelength sources suitable for PIC's have also been developed. Bell Labs, for example, has devised a multi-layered chip that simultaneously emits from its four stacked junctions radiation at 828, 853, 879 and 903 nanometers. Unlike the Hitachi laser multiplexer PIC, all the junctions in the Bell Labs device are driven by the same signal. A more complex chip design, however, should permit the individual junctions to be driven independently of one another.

Photonic Light-Detection Circuits. Since silicon can be used to detect light (from about 350 to 1000 nanometers) and to make electronic circuits, single-chip monolithic photonic receivers are

well developed. Figure 3, for example, shows a low-cost light-wave receiver that includes an on-chip detector, preamplifier, Schmitt trigger and output buffer. Figure 4 shows a sophisticated light receiver employing hybrid construction.

Since silicon is a very inefficient material for light-emitting diodes, it is not possible to integrate effective light sources and sensors on a silicon substrate. However, materials like GaAs, GaAlAs, indium phosphide (InP) and indium gallium arsenide phosphide (InGaAsP) can be formed into diodes that both emit and detect light. Furthermore, conventional electronic circuits can be integrated upon such semiconductors together with emitters and detectors.

Figure 5 is a dual-junction detector made from InP and InGaAsP that can simultaneously detect radiation at two separate wavelengths. Also shown in Fig. 5 is a pair of spectral response curves for this diode showing peaks at 1.08 and 1.17 micrometers.

The diode in Fig. 5, which was developed at Bell Labs, can be used to detect two data channels being simultaneously transmitted through an optical fiber at two wavelengths. Similar diodes having multiple junctions or miniature diffraction grating filters that resemble the corrugations in DFB and DBR lasers may allow three or more wavelengths to be detected simultaneously.

Dual-Function Lasers and Detectors. A decade ago comparatively few scientists and engineers recognized that a single semiconductor junction could double as an efficient light source and detector. In a formal review prompted by


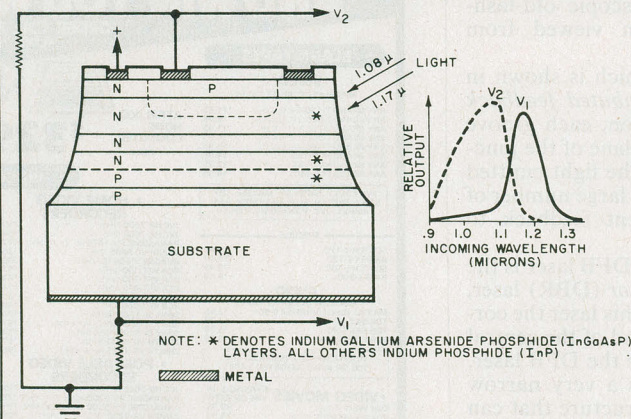


Fig. 5. Dual-wavelength demultiplexing photodiode.

Fig. 6. Single-chip laser and detector.

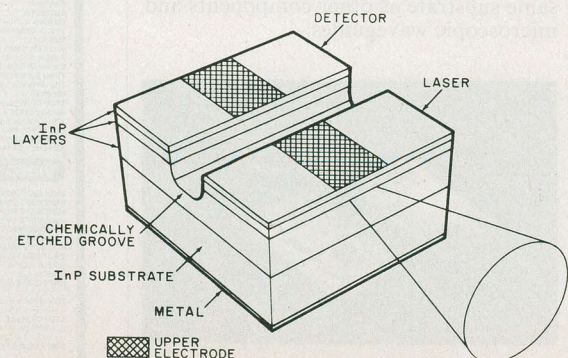

solid-state developments

an invention suggestion I had submitted in 1973, scientists and patent attorneys at Bell Labs concluded such devices "usually cannot be designed" and it is "extremely unlikely that systems considerations would permit a single device to operate as both source and detector."

Several years ago Bell Labs took another look at this technology, reversed its earlier conclusions and began applying it in experimental photonic systems. They have since made remarkable progress in developing dual-function photonic devices.

One example is the single-chip laser and detector in Fig. 6. The most unique aspect of this device is the chemically etched groove that physically separates the upper portion of the chip into two separate regions.

The etching process causes the walls of the groove to be very smooth and flat. Since the external faces of the chip are cleaved, each side has the potential ability to operate as a laser. Bell Labs has instead used one side as a laser and the other as a detector that monitors the output from the grooved face of the laser.

Another example is a 4-layer LED that functions as a single-chip optical repeater or regenerator. A weak incoming pulse of light switches on the LED and causes it to emit a much stronger pulse. Though Bell Labs scientists devised and patented a 4-layer diode for this application, standard 4-layer LEDs made by Sharp Corporation of Japan since 1974 will also operate as optical repeaters.

Other Photonic Devices. The eventual integration of sources, detectors, waveguides and electronic circuits onto single chips will require micro-miniature optical components. Already, several laboratories have made two-dimensional lenses and prisms in the form of specially shaped layers and films deposited on a substrate using integrated circuit technology. These tiny optical components can readily focus and bend ultra-thin beams of light.

Also required will be optical switches, shutters, modulators, polarizers, and other devices and components that can modify or switch an existing beam of light or deflect it from one fiber to another. Many experimental devices capable of performing these functions have already been developed. Some use piezoelectric materials to deflect beams of light. Surface acoustic waves on a piezoelectric substrate can even act as a tunable diffraction grating that selectively reflects, and hence filters, incoming wavelengths.

You can find out much more about PIC devices by spending a few hours at a good library. You might begin with a three-part series on the subject that appeared in the *Bell Labs Record* (Dec. 1980, Jan. 1981, and Feb. 1981). For a more detailed treatment, see "Components for Optical Communications Systems: A Review," *Proceedings of the IEEE* (June 1980). For a complete overview, see "Future Looks Bright for Guided Wave Optics," *High Technology* (Nov./Dec. 1981). ♦

NEW 23K PERSONAL COMPUTER \$239

SPECIAL FACTORY SALE PRICE!!

You get this NEW APF IM-1 full size, extra featured computer: Includes a powerful 6800 motorola microprocessor, 14 thousand bytes ROM with a simplified LEVEL II BASIC built in, 9 thousand bytes user RAM, Color, Sound, Full 53 professional keyboard, two 10 key numeric pads, two controllers, high speed built in cassette that operates at 1200 baud, loads and reads 4 times faster than other computers, has built in speaker with volume control, microphone jack, and 3 digit counter, high resolution graphics 256 x 192 (LIKE APPLE). Text display is 16 lines, 32 characters. It has 8 colors. Will accept TAPE-DISK OR PLUG IN CARTRIDGES. Includes owners manual and BASIC language book. 90 days parts and labor warranty, UL listed, FCC approved. All this in a beautiful black and white CONSOLE CASE. Weighs 20 pounds, list price \$599.95.





15 DAY FREE TRIAL. Return within 15 days complete and undamaged for refund of purchase price.

DON'T MISS THIS FANTASTIC SALE!! Phone 312-382-5244 to order and get delivery in 7 days, or send a certified check, money order or personal check to: **Protecto Enterprises, Box 550, Barrington, Ill. 60010.** WE HONOR VISA AND MASTER CHARGE, ship C.O.D. Add \$15.00 for shipping, handling and insurance. Illinois residents ad 6% tax.

CIRCLE NO. 39 ON FREE INFORMATION CARD

FREE McIntosh STEREO CATALOG and FM DIRECTORY

Get all the newest and latest information on the new McIntosh stereo equipment in the McIntosh catalog. In addition you will receive an FM station directory that covers all of North America.

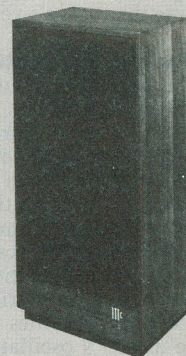

SEND TODAY!

McIntosh Laboratory, Inc.
East Side Station P.O. Box 96
Binghamton, N.Y. 13904-0096

PE

NAME _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

If you are in a hurry for your catalog please send the coupon to McIntosh.
For non rush service send the **Reader Service Card** to the magazine.

CIRCLE NO. 29 ON FREE INFORMATION CARD

EXPERIMENTER'S CORNER

By Forrest M. Mims

Experimenting with Piezoelectric Devices

Part 2. Piezo-Alerters and Crystal Oscillators

WE experimented with piezoelectric spark generators, microphones, and filters in Part 1 of this two-part series on piezoelectric devices. This month, we'll discuss using piezoelectric alerters and quartz-crystal oscillators.

Piezoelectric Alerters. Crystal microphones and speakers are designed to operate across a wide band of audio frequencies. Piezoelectric alerters, however, are generally designed to operate at a fixed or relatively narrow audio-frequency band. They are true solid-state sound sources.

As far as I know, the first commercial piezo-alerter was the Mallory Sonalert®. Sonalerts are available in various kinds of housings having a range of audio outputs. Most include self-contained drive circuitry.

I first purchased a Sonalert in 1966 and a few years later used it to measure the velocity of a model rocket in flight. The Sonalert, a Model SC628 emitting a tone of 2.9 kHz, was installed in the base of a model rocket. The rocket's engines were installed in pods attached to its center tube. The sound from the Sonalert was tape recorded from the ground during the rocket's flight. By measuring the doppler shift, it was possible to determine the rocket's velocity.

Alerter Construction and Operation. Thanks to their miniature size, low current consumption, and penetrating sound, piezoelectric alerters are commonly used in digital watches, clocks, smoke alarms, pagers, appliances, calculators and games. A typical alerter is a metal disc from 25 to 40 mm in diameter upon which is bonded a smaller disc of piezoceramic material. A conductive film is deposited over the ceramic layer, and electrodes are attached to it and the metal disc.

Often alerter discs include a *feedback electrode* made by isolating a small section of the metal film on the back of the piezoceramic material. The feedback electrode, which is shown in Fig. 1, simplifies the design of driver circuits and stabilizes the alerter's oscillation frequency. Piezo-alerter discs can be purchased alone or installed in plastic holders complete with connection leads. Versions with self-contained driver circuits much like the Mallory Sonalert are now available from several companies.

It is essential to properly mount an alerter disk for maximum sound output. If the vibrating portion of the disk is cemented or otherwise attached to a mount, severe attenuation of the device's sound output will occur.

Figure 2 shows three acceptable ways to mount an alerter

disc. The *center mount* permits the outer rim of the disc to vibrate, while the *edge mount* permits the entire disc to vibrate. Both of these methods permit the disc to vibrate across a range of audio frequencies.

The *nodal mount*, also shown in Fig. 2, is best for a very-loud, single-frequency tone. The node of a piezo-alerter disc is a concentric ring around the center of the disc at which vibration at a fixed frequency is at a minimum (or even non-existent). Ideally, the diameter of the nodal ring is 0.55 times the diameter of the metal disc. The actual diameter, however, varies from the predicted value due to the presence of the piezoceramic disc and nonuniformities in the metal disc.

One way to find the actual location of the nodal ring is to sprinkle fine sand or powder on a piezo-alerter disc being driven at a desired frequency by a suitable oscillator. The powder particles will gradually bounce into the nodal region and form a thin, circular ring around the center of the disc.

Piezo-Alerter Driver Circuits. A piezo-alerter can be driven directly by a variable-frequency signal generator. Even alerters having nodal-mounted discs can be operated across the audio spectrum, although edge- and center-mounted discs work best across a wide band of audio frequencies.

Figure 3 shows a simple, single-transistor driver for a piezo-alerter having a feedback terminal such as the model PKM11-6A0 from muRata Corporation of America (1148 Franklin Rd., SE, Mariette, GA 30067). This alerter is also available from Radio Shack (catalog number 273-064).

The PKM11-6A0 can be operated over a specified range of 3 to 15 V (mine works down to 1 V) and has a current consumption over this range of 2 to 12 mA. Its output sound-pressure level ranges from more than 80 dB at 3 V to more than 90 dB at 15 V. Its resonant frequency is within 700 Hz of 6.5 kHz. It has an operating temperature range of -20° to $+60^{\circ}$ C and weighs only 1.5 grams.

A test version of the circuit in Fig. 3 drove the alerter at a frequency of 6772 Hz when V_{CC} was 3 V. This frequency is controlled by the dimensions of the feedback tab on the alerter disc and not the components of the oscillator. For example, changing $R1$ over a range of 100 to 330 kilohms altered the shape of the waveform but not the frequency. The frequency is nearly independent of changes in V_{CC} .

Figure 4 shows a simple, single-chip, CMOS oscillator suitable for driving a piezo-alerter. This circuit is adapted from one in a Gulton Industries application note. Notice how the 4049

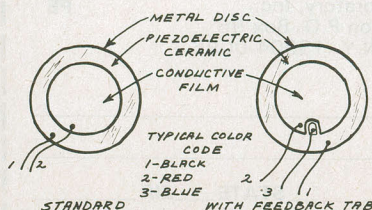


Fig. 1. Piezoelectric alerter elements.




Fig. 2. Three mounting arrangements for piezoelectric alerter elements.


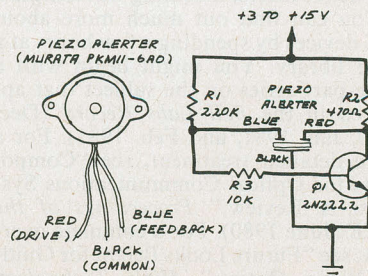


Fig. 3. Piezoelectric alerter driver circuit.

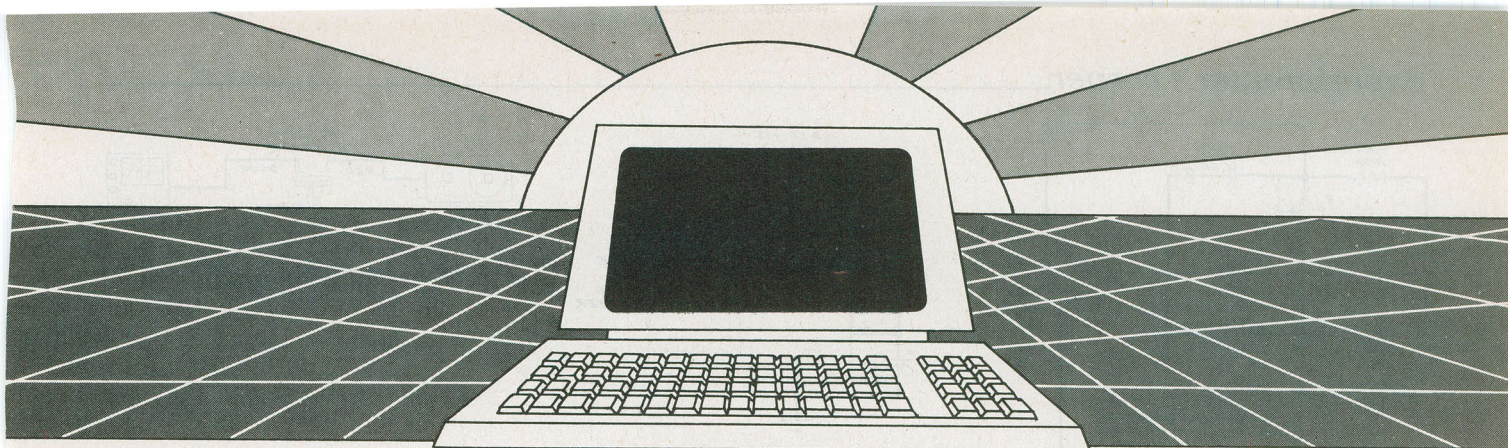

DISCOVER THE MAGAZINE THAT LAUNCHED THE MICROCOMPUTER INDUSTRY

Popular Electronics

Incredible as it may seem, *Popular Electronics* launched the microcomputer industry. Back in 1975, we published plans for building the world's finest microcomputer based on the 8080 cpu. These plans generated incredible excitement—and started the world thinking about personal computing.

Popular Electronics always helps its readers experience the advances of the future—today. We do it with clearly written, in-depth articles explaining an innovation. Plans for building useful, low-cost projects incorporating the new technology. And reviews of mass-produced equipment when manufacturers finally catch on. Whether it's audio, video, computers, telephones, lasers or something that's just been invented, *Popular Electronics* will help you have fun with the newest, the most sophisticated, the most innovative electronics technology around.

Helpful buying guides

Popular Electronics compares and contrasts electronics gear in handy buyer's guide articles. We discuss features and options, what to look for, and how to get the best value on the market. Recent buyer's guide articles have covered computer printers, cordless home telephones, video cassette recorders, high-tech audio cassettes, video disc players, sophisticated telephones, projection televisions, pocket "beepers," video cameras and oscilloscopes.


World-famous test reports

In every *Popular Electronics* issue you'll find our famous in-depth test reports. We take a new electronics product, test it, and analyze the results. Recently we've tested computers (Apple, APF, Atari, Hewlett-Packard, IBM, Netronics, Ohio Scientific,

Popular Electronics

How Temperature Affects Components
Preview of the VHD Video Disc Player
Two Projects for Summer

Word-Processing Computer Systems

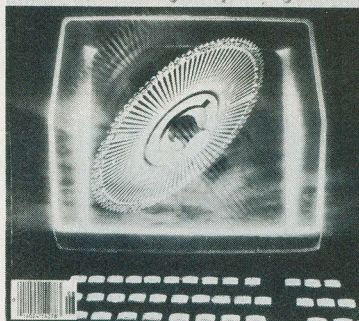

Radio Shack, Sinclair, Xerox), *software* (dBASE II), *audio equipment* (Bang & Olufsen, Crown, dbx, Hitachi, JBL, Mitsubishi, Optonica, Sansui, Yamaha), and *video* (GE, Hitachi, Pioneer, Panasonic, Quasar, RCA, Sharp, Sony, Technicolor, Toshiba, Zenith).

Innovative construction projects

If you're a do-it-yourselfer, you'll love the construction projects in *Popular Electronics*. Not only have we brought the

world the 8080 microcomputer, but also projects for building the first low-cost modem. The first computer keyboard integrated with the computer (SOL). The first low-cost voice synthesizer. The first low-cost logic analyzer. A low-cost 1802-based microcomputer (ELF). An 1802-based EPROM programmer. An automatic line voltage regulator....

As you can see, our construction projects, while not terribly difficult, will keep you at the forefront of technological development—without your spending much money. And in the future, we'll be bringing you construction projects to help you get more from your computer, including ways to interface your microcomputer with new advances in radio, telephones and video!

Get the leader in the field— at up to 33% off!

Popular Electronics is the world's most widely read electronics magazine. Now you can subscribe at big savings—up to 33% off! At our New Subscriber rates, a one-year subscription is only \$12.97. Take advantage of this offer—complete and return the coupon or postage-paid reply card today!

Popular Electronics

P.O. Box 2774, Boulder, Colorado 80322

- ☐ **YES!** Send me one year (12 issues) of *Popular Electronics* for \$12.97—I save 19%.
☐ I prefer two years for \$22.97—
I save 28%. ☐ Make that three years for \$31.97—I save 33%.

Savings based on full one year subscription price of \$15.97.

8H 260

Mr./Mrs./Ms. _____ (please print full name)

Address _____ Apt. _____

City _____ State _____ Zip _____

CHECK ONE: ☐ Payment enclosed. ☐ Bill me later.

Offer valid in U.S. and possessions only.

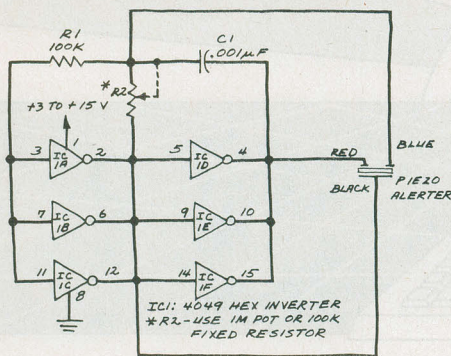


Fig. 4. An IC alerter driver circuit.

gates are connected in parallel to permit higher drive current.

The circuit in Fig. 4 has the advantage of having an adjustable frequency. A breadboard version I built operated over a range of about 185 Hz to 7 kHz. The frequency change, however, was not gradual but occurred in steps. When the piezo-alerter reached its resonant frequency of around 7 kHz, changing $R2$'s resistance had no effect.

The circuit in Fig. 5 will drive piezo-alerter with and without feedback terminals at a variable frequency. Unlike the circuit in Fig. 4, this circuit provides a gradual, nonstepped output tone. A slow *pock . . . pock . . . pock* sequence can be produced by using a 0.47- μ F capacitor for $C1$.

The operation of a piezo-alerter's feedback electrode can be graphically demonstrated by connecting the anode of a red LED to the blue lead of the alerter in Fig. 5. Connect the LED's cathode to ground. The output from the blue lead easily exceeds a few volts, more than enough to forward-bias the LED and cause it to emit a dim glow.

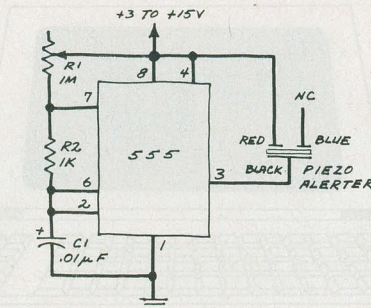


Fig. 5. Adjustable-frequency driver circuit.




Fig. 6. Using a piezoelectric alerter as a signal filter.

Keep in mind that there is no electrical connection between the feedback electrode and the main electrode on the piezoelectric ceramic disk. The voltage at the feedback terminal is true piezoelectricity. It is generated in response to the pressure wave that appears in the piezoelectric ceramic disk. (The pressure wave is generated in response to the drive signal.) The LED demonstration shows how a piezoelectric device can function as a solid-state transformer or isolator.

Using an Alerter as a Filter. Figure 6 shows how to demonstrate the use of a piezo-alerter as a ceramic filter. The model PKM11-6A0 exhibited frequency-response peaks at 2.3 kHz, 7.0 kHz, 18 kHz, 27 kHz and 45 kHz. While a scope is helpful, it's possible to monitor the filter's operation by simply listening to the change in amplitude of the filter's sound output as the signal generator's frequency is varied. Of course this method only works at audio frequencies.

Incidentally, I attempted to measure the delay introduced by



We're going to make a lot of fussy people very happy. Epson.

A lot of nitpickers have tried to find a fault on the new Epson MX Series printers. And failed.

First they looked at our print quality — which is excellent — and our character fonts, which is 66 different type styles, including italics, a handy subscript and superscript, international character symbols, and one-pass underscore.

Then they checked out our GRAFTRAX-PLUS graphics, which gives them ultra-high resolution, bit image graphics, and the other MX Series features, like programmable form length, horizontal tab and right margin; true backspace; and a bidirectional, logic seeking, disposable print head.

They looked at the choice, which includes the MX-80, the MX-80 F/T with both friction and tractor paper feed, and the 136-column MX-100. And the reliability rate, which is over 98%.

Finally, they looked at the price. And they smiled.

The Epson MX Series. You might say it was made for fussy people.

By fussy people.

EPSON
EPSON AMERICA, INC.

3415 Kashiwa St. • Torrance, CA 90505 • (213) 539-9140

the piezoelectric ceramic with the help of a dual-trace 100-MHz oscilloscope. The speed of sound in the ceramic is around 5000 m/s according to *Reference Data for Radio Engineers* (ITT, Howard W. Sams & Co., 1975, p. 4-44). Since the gap between the main and feedback electrodes on the piezo-alerter disc is 0.5 mm, the expected delay is 100 nanoseconds.

Though the driver circuit for the test, the 555 oscillator in Fig. 5, provided clean leading- and trailing-pulse edges, the signal elicited from the feedback terminal had too much ringing for an accurate measurement of the delay. While I *think* I monitored a 100-ns delay, I cannot be certain due to the sloppy appearance of the feedback pulse. Perhaps you will have better results.

Other Alerter Ideas. The very narrow audio spectrum produced by piezo-alerters makes them ideal for use in experiments with sound. With the help of a microphone and an oscilloscope, you can easily demonstrate constructive and destructive interference of sound waves. Try pointing the microphone at the alerter while moving the microphone back and forth. Or point both the alerter and the microphone at a flat metal or plastic panel which you can move back and forth. The proper arrangement will reveal a periodic amplitude fluctuation in the received signal, which you can view on the scope.

Note that, in an enclosed room, the sound of an alerter can vary dramatically in intensity. This is a result of the way the single-frequency acoustical waves from the alerter form complex interference patterns. Negative interference causes the formation of *dead spots* where the sound is virtually imperceptible. Constructive interference forms regions where the sound is uncomfortably shrill.

Sounds from radios, televisions, phonographs and people span a wide range of audio frequencies. Therefore, the effects of interference are not nearly as noticeable.

The effects of the acoustical interference caused by the pure tone emitted by an alerter may or may not be desirable. It is cer-

tion of the board. If the alerter is mounted on a cantilevered portion of a circuit board, it may set up vibrations in the board, substantially reducing its sound output.

Finally, a precaution I've *not* seen in the data sheets concerns the shrill sound which can be produced by some alerters. I've found that the sound can easily produce a piercing headache. While experimenting with the circuits described above, I eventually resorted to covering the aperture of the alerter with clay or tape to muffle the sound output.

Quartz-Crystal Oscillators. The final piezoelectric device we will consider is the quartz-crystal oscillator. Precision-cut wafers of quartz are used to make piezoelectric resonators having exceptional frequency stability. Figure 7 shows an ultra-simple, crystal-controlled, unijunction-transistor oscillator that uses only four components. The quartz crystal replaces a capacitor normally used in this circuit. The oscillation frequency can be tuned from about 50 kHz to exactly 1 MHz when the crystal has a resonant frequency of 1 MHz. Tuning is accomplished by altering the resistance of *R1*.

If you monitor the output of the oscillator in Fig. 7 with an oscilloscope, you will notice that the oscillation frequency tends to change in jumps as *R1* is adjusted. This is a result of the crystal's oscillating at various harmonics of its 1-MHz resonant frequency. Near 1 MHz, the oscillator quickly locks onto the crystal's resonant frequency.

The circuit in Fig. 7 is useful for understanding the operation of a simple quartz-crystal-controlled oscillator. It can also be used to supply a marker frequency to calibrate oscilloscopes, signal generators, and shortwave receivers.

Figure 8 shows a very useful crystal-controlled, clock-pulse generator. The circuit is designed around Intersil's ICM7209, a CMOS general-purpose timer chip. The crystal can be any quartz crystal having a resonant frequency of 10 kHz to 10 MHz. The circuit consumes only about 11 mA when powered by a 5-V supply and requires only four external components. ◇




Fig. 7. UJT oscillator.

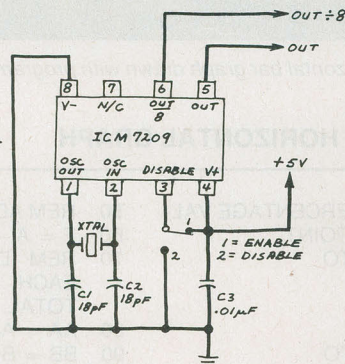


Fig. 8. Clock-pulse generator.

tainly attention getting to walk by an alerter and notice the changes in sound intensity. But it can also be confusing, particularly if you are trying to find the source of the sound in an enclosed room having many flat, hard reflecting surfaces! The resultant interference problems can be avoided by using multiple or swept tone alerters.

If you enjoy experimenting, try using a piezo-alerter as a microphone. You'll find that alerters with nodal mounting function as *frequency selective* sound detectors. Also, try adding a tube or reflector to an alerter to form a directional sound source. You can try operation at resonant ultrasonic frequencies. You can even develop various kinds of sonic radar circuits or try operating an alerter under water.

Alerter Precautions. Data sheets for piezo-alerters note that mechanical shock can cause them to generate high-voltage spikes that can damage their drive circuit and perhaps other associated circuits. This problem can be alleviated by installing an appropriately rated protection diode directly across the alerter.

Another precaution concerns the placement of an alerter on a circuit board. Be sure to mount the alerter on a rigid, fixed por-

Drake's New Digital Multimeter with Advanced Auto Ranging Features.



Simple and easy to operate. The Drake DM2350 Digital Multimeter automatically measures your selected functions in up to 5 ranges, at the touch of a button. Drake's Digital Multimeter will not overload circuits and DC accuracy is 0.8% of reading \pm 0.2% of full scale. A continuity test sounds a signal when circuit resistance is less than 20 ohms. The liquid crystal display and three step protection feature with auto-zeroing, polarity indication and over-range warning signal make it ideal for servicemen or hobbyists.

The Drake Digital Multimeter is sold complete with batteries (battery life is greater than 300 hrs.), probes, 20 amp current shunt, spare fuse, and soft carrying case for only \$95.95.

Add \$2.50 shipping and handling per order. Send check with order and provide street address for UPS shipment. Ohio residents add Sales Tax.



DRAKE

In Ohio, or for
information call:
1-513-866-2421

Credit-Card buyers
may call toll free
1-800-543-5612

R. L. DRAKE COMPANY

540 Richard Street, Miamisburg, Ohio 45342



PROGRAMMER'S NOTEBOOK


By Jim Keogh

Drawing Bar Graphs

ONE of the more common methods of showing data in graph form on a video monitor is by extending bars from a predetermined base line to a plotted data point.

Let's take a close look at how such a bar-graph routine can be incorporated in a program. We will give programs for the TRS-80 and the Apple II, but they can be modified to run with almost any BASIC in a machine having memory-mapped video or a terminal having cursor control.

To modify these programs, compare the functions of each portion of the program which are defined in the REM statements with similar functions found in your BASIC. For example, consider a bar-graph program that "draws" a bar graph from left to right on the screen (Table I). Throughout this program, the REM statements will explain what is tak-

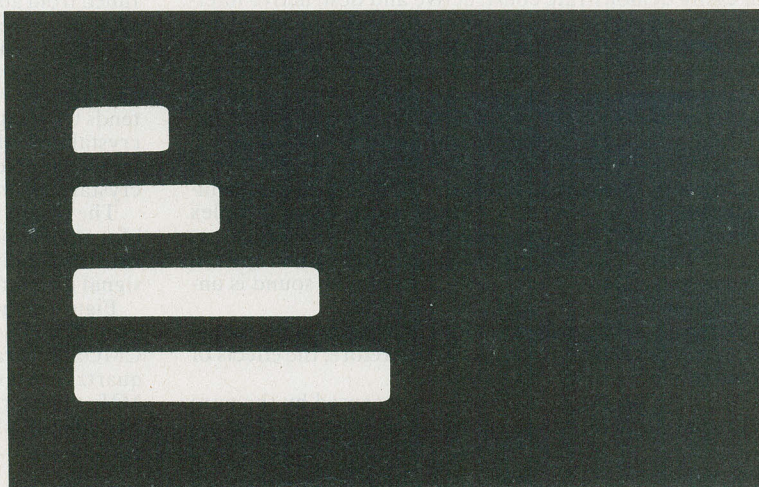

Horizontal bar graph drawn with program in Table I.

TABLE I—PROGRAM FOR HORIZONTAL GRAPH

TRS-80

```
10 REM CLEAR THE SCREEN
20 CLS
30 REM ASK FOR FOUR DATA POINTS
40 INPUT "FOUR VALUES"; A, B, C, D
41 REM CLEAR THE SCREEN
42 CLS
50 REM ADD THE FOUR DATA POINTS
60 F = A + B + C + D
70 REM DETERMINE THE DECIMAL
  EACH DATA POINT IS OF THE
  TOTAL.
80 AA = A/F
90 BB = B/F
100 CC = C/F
110 DD = D/F
120 REM DETERMINE THE ROUNDED
  OFF PORTION OF THE BAR GRAPH
  TO BE DISPLAYED. THE NUMBER IN
  THE BRACKETS REPRESENTS THE
  POKE POSITIONS OF THE DISPLAY
  SCREEN.
130 AW% = AA * (15742 - 15680)
140 BW% = BB * (15780 - 15728)
150 CW% = CC * (15998 - 15936)
160 DW% = DD * (16126 - 16064)
170 REM THE FOLLOWING DRAWS THE
  BAR GRAPH THAT WILL START AT
  THE FIRST POKE POSITION AND
  STOP AT THE FIRST POKE POSI-
```

TION PLUS THE PERCENTAGE VAL- UE OF THE DATA POINT.

```
180 FOR AS = 15680 TO
  (15680 + AW%)
190 POKE AS, 191
200 NEXT AS
210 FOR BS = 15808 TO
  (15808 + BW%)
220 POKE BS, 191
230 NEXT BS
240 FOR CS = 15936 TO
  (15936 + CW%)
250 POKE CS, 191
260 NEXT CS
270 FOR DS = 16064 TO
  (16064 + DW%)
280 POKE DS, 191
290 NEXT DS
300 REM THE NEXT STATEMENT PRE-
  VENTS THE COMPUTER FROM DIS-
  PLAYING THE WORD 'READY'.
310 GOTO 310
```

APPLE II

```
10 REM CLEAR THE SCREEN
20 CALL -936
30 REM ASK FOR FOUR DATA POINTS
40 INPUT "FOUR VALUES"; A, B, C, D
41 REM CLEAR THE SCREEN
42 CALL -936
```

```
50 REM ADD THE FOUR DATA POINTS
60 F = A + B + C + D
70 REM DETERMINE THE DECIMAL
  EACH DATA POINT IS OF THE
  TOTAL.
80 AA = A/F
90 BB = B/F
100 CC = C/F
110 DD = D/F
120 REM DETERMINE THE ROUNDED
  OFF PORTION OF THE BAR GRAPH
  TO BE DISPLAYED. THE NUMBER 30
  REPRESENTS THE VALUE OF 100%
  OF THE BAR GRAPH
130 AW = INT (AA * 30)
140 BW = INT (BB * 30)
150 CW = INT (CC * 30)
160 DW = INT (DD * 30)
161 REM TURN ON THE GRAPHIC FUNC-
  TION AND DRAW RED BARS.
162 GR: COLOR = 1
170 REM DRAW THE BAR GRAPH
180 HLIN 0, (AW) AT 10
190 HLIN 0, (BW) AT 15
200 HLIN 0, (CW) AT 20
210 HLIN 0, (DW) AT 25
300 REM THE NEXT STATEMENT PRE-
  VENTS THE COMPUTER FROM DIS-
  PLAYING THE 'READY' STATE-
  MENT.
310 GOTO 310
```


TABLE II—PROGRAM FOR VERTICAL GRAPH

TRS-80	280 POKE DS, 191
10 REM CLEAR THE SCREEN	290 NEXT DS
20 CLS	300 REM THE NEXT STATEMENT PRE-
30 REM ASK FOR FOUR DATA POINTS	VENTS THE COMPUTER FROM DIS-
40 INPUT "FOUR VALUES"; A, B, C, D	PLAYING THE WORD 'READY'.
41 REM CLEAR THE SCREEN	310 GOTO 310
42 CLS	
50 REM ADD THE FOUR DATA POINTS	
60 F = A + B + C + D	
70 REM DETERMINE THE DECIMAL	APPLE II
EACH DATA POINT IS OF THE	10 REM CLEAR THE SCREEN
TOTAL	20 CALL - 936
80 AA = A/F	30 REM ASK FOR FOUR DATA POINTS
90 BB = B/F	40 INPUT "FOUR VALUES"; A, B, C, D
100 CC = C/F	41 REM CLEAR THE SCREEN
110 DD = D/F	42 CALL - 936
120 REM DETERMINE THE ROUNDED	50 REM ADD THE FOUR DATA POINTS
OFF PORTION OF THE BAR GRAPH	60 F = A + B + C + D
TO BE DISPLAYED. THE NUMBER IN	70 REM DETERMINE THE DECIMAL
THE BRACKETS REPRESENTS THE	EACH DATA POINT IS OF THE
POKE POSITIONS OF THE DISPLAY	TOTAL
SCREEN.	80 AA = A/F
130 AW% = AA * (16336 - 15663)	90 BB = B/F
140 BW% = BB * (16346 - 15673)	100 CC = C/F
150 CW% = CC * (16356 - 15683)	110 DD = D/F
160 DW% = DD * (16366 - 15693)	120 REM DETERMINE THE ROUNDED
170 REM THIS DRAWS THE BAR GRAPH.	OFF PORTION OF THE BAR GRAPH
IT WILL START AT THE FIRST POKE	TO BE DISPLAYED., THE NUMBER
POSITION AND STOP AT THE FIRST	35 REPRESENTS THE VALUE OF
POKE POSITION MINUS THE PER-	100% OF THE BAR GRAPH.
CENTAGE VALUE OF THE DATA	130 AW = INT (AA * 35)
POINT.	140 BW = INT (BB * 35)
180 FOR AS = 16336 TO	150 CW = INT (CC * 35)
(16336 - AW%) STEP - 64	160 DW = INT (DD * 35)
190 POKE AS, 191	161 REM TURN ON THE GRAPHIC FUNC-
200 NEXT AS	TION AND DRAW RED BARS.
210 FOR BS = 16346 TO	162 GR: COLOR = 1
(16346 - BW%) STEP - 64	170 REM DRAW THE BAR GRAPH.
220 POKE BS, 191	180 VLIN (AW), 35 AT 10
230 NEXT BS	190 VLIN (BW), 35 AT 15
240 FOR CS = 16356 TO	200 VLIN (CW), 35 AT 20
(16356 - CW%) STEP - 64	210 VLIN (DW), 35 AT 25
250 POKE CS, 191	300 REM THE NEXT STATEMENT PRE-
260 NEXT CS	VENTS THE COMPUTER FROM DIS-
270 FOR DS = 16366 TO	PLAYING THE WORD 'READY'.
(16366 - DW%) STEP - 64	310 GOTO 310

ing place at that particular point in the program. To get things started, the computer will request that you INPUT four values representing the data points to be plotted. Once the last piece of data is keyed in, the video display will "draw" four bar graphs, each bar representing one piece of data.

You can easily expand the number of data points as required. However, before you begin to make any modifications, you should understand the programming approach.

The program starts by causing the computer to set aside a certain area on the screen for each bar graph. This is done without knowing the values of the data points. The computer "assumes" that the amount of space set aside is equal to a bar graph of maximum amplitude (100%).

When the final INPUT data point is ENTERED, the computer adds the values of the data points, with the numeric sum of all data points becoming the "100%"

value. This establishes what percentage each data point represents of the total.

Finally, the computer illuminates that portion of the bar graph which represents the percentage the data point is of the total. The computer is able to represent all the data in a neatly prepared bar graph since the program operates on a percentage basis and not directly with the actual value of each data point.

The second program (Table II) example is very similar, except that the bar graphs are "drawn" from bottom to top, rather than from left to right on the screen. (Table II). As before, the program calls for four data points.

These bar-graph programs can be used as a subroutine (with appropriate line-number changes) in your own software. For example, the results of an analysis can be displayed in several ways, such as in a table or a bar graph. The routines illustrated in this column use data points INPUT from the main program and display them as a bar graph. ◇

Popular Electronics

ADVERTISERS INDEX

RS no.	ADVERTISER	PAGE no.
2	Aaron Gavin	89
3	All Electronics Corp.	78
4	AP Products	86
5	Army National Guard	2
6	Artec Electronics	76
7	Audio-Technica U.S., Inc.	89
	C & D Electronics	88
8	Chaney Electronics	96
	Classified Advertising	96,100-105
	Cleveland Institute of	
	Electronics, Inc.	26-29
1	Communications Electronics	9
9	CompuServe	Cv 2
10	Computers, Peripherals, Unlimited ..	74
	Digi-Com	88
13	Digi-Key Corp.	91
14	Discwasher	Cv 4
11	R.L. Drake	74,83
	Electronic Specialists	32
15	Epsom America	82
16		
17	Firestik	89
18	Focus	73
	Gladstone Electronics	89
19	Global Specialties	66
20	Grantham College of Engineering ...	47
21	Guardian Electronics	11
	Heath Co.	36-39
22		
23	IBM	8
24	Illinois Audio	47
	Jameco Electronics	94, 95
26	JDR Microdevices	92-93
27	J & R Music World	77
28		
	McIntosh Laboratory, Inc.	79
29	MFJ Enterprises	88
30	Maxell Corp. of America	3
31	Menotech	7
32	Micro Management Systems	88
33		
	National Institute of Technology	12
34	National Technical Schools	62-65
	Netronics, R & D Ltd.	33, 75
35	Nippon Electric Co., Ltd.	Cv 3
	NRI Schools	16-19
	OK Machine & Tool Corp.	23
36		
37	PAIA Electronics, Inc.	73
38	Personal Computer Systems	70
39,40	Protecto Enterprises	32,79
	Quest Electronics	96
41		
	Radio Shack	99
	Shure Brothers, Inc.	77
42	Simple Simon Kits	87
	Sinclair Research	4, 5, 25
	Tab Books	59
44	TAMS, Inc.	73
45	TDK	32
43	Tektronix	1
	Texas Instruments, Inc.	13

OPERATION ASSIST

Eico Model 232 VTVM. Need service manual, schematic, and technical information. T.L. Crosley, 7506 N. Damen Ave., Chicago, IL 60645.

Monsanto Model 114A frequency counter. Need schematic and service manual. Robert D. Bollinger, 623 Belvedere St., Carlisle, PA 17013.

Hammarlund HQ-140-XA shortwave receiver. Need instruction book and schematic. Ed Diemer, 3852 Arc Way, Lawrenceville, GA 30245.

Broadmoor Model 1464 AM/FM stereo receiver. Need schematic or service manual. David Zirpoli, 45 George St., Green Island, NY 12183.

Victor Model 1400 calculator. Need schematic diagram. Joseph A. Spana, 1781 Rose St., Lower Burrell, PA 15068.

Hallicrafters Model SW-500 receiver. Need schematic and alignment manual. James Kersey, 12426 Kingsley Dr., Louisville, KY 40229.

Hallicrafters Model TW1000A receiver. Need schematic and knobs. C.C. Hutchison, 11303 Featherstar, Houston, TX 77067.

Gonset Model 3133 Communicator III transmitter. Need schematic and manual. Charles Melillo, 51 Summit Avenue, North Plainfield, NJ 07066.

Eico Model 360 sweep generator. Need owner's manual and schematic. Bill Kennedy, 184 Street, Hesperia, MI 49421.

National Radio Institute Model 600 color TV receiver. Need convergence circuit board EC-19 and parts L601, 602, 603 and T601. H. Sierra, 217 E. 64th St., Los Angeles, CA 90003.

RCA Institute, Inc. 3" oscilloscope. Need schematic and operating manual. A.B. Cerwin, 1045 Stone St., Rahway, NJ 07065.

Knight Star Roamer receiver kit. Need manual, schematic and any other information. Rob Sobkowiak, 2219 N. Meadowbrook Dr., Plainfield, IL 60544.

Hallicrafters Model SX28 super skyrider. Need alignment information and procedures. C. Lee, 311-96th St., Marmet, W. VA 25315.

Graymark Model 529R burglar alarm kit. Need assembly instructions. Frederick T. Passo, 133 Vanderbilt Ave., Woodbury Hts., NJ 08097.

EMC Model 501 signal generator. Need schematic and parts list. Gerald Brindlay, 3705 Lipscomb, Ft. Worth, TX 76110.

Hallicrafters Model CRX-1 receiver. Need schematic and operating manual. Robert Coulter, Box 60, Ellsworth, PA 15331.

Pioneer Model SX9000 receiver. Need schematic and manual. Kenny Mitchell, 1328 Linden Ave., Zanesville, OH 43701.

Eico Model 221 VTVM and **Western Electric** Model KS-16610 amplifier. Need schematics, owner's manuals and operating instructions. Mike Melton, 3504 Pageant Dr., Sacramento, CA 95826.

Kenwood Model KR6600 AM/FM receiver. Need schematic diagram and instruction manual. Luis Lorenzo Lopez Tejada, Condominio Luperon, Apt. B-26, Herrera Santo Domingo, Dominican Republic.

Hallicrafters R649A/UR radio receiving set. Need schematic. Jack Higgins, 788 Columbus Ave., Apt. 1-0, New York, NY 10025.

Barrington AM/FM portable radio. Need dial cord stringing instructions. Bender Electronics, Box Q, Limon, CO 80828.

Hallicrafters Model S108 receiver. Need dial glass. Walter J. Mitchell, 201-Five Cities Dr., SP. 41, Pismo Beach, CA 93449.

Conar Model 255 oscilloscope. Need manual and schematic. Walter Ray, 929 Fairview, Shreveport, LA 71104.

Sanken Model SI-1050G hybrid audio amp chip. Need schematic, pin-out and power derating chart. Mark Tarbell, 906 S. Lantana Ave., Brea, CA 92621.

Eicocraft Model EC-500 tremolo kit for guitar amplifier. Brian Garlock, 79 Dayton Rd., W. Redding, CT 06896.

Minshall Model K electronic organ. Need copies of schematics, service manuals and instruction manuals. James R. Warner, 103 Des Plaines Ave., Forest Park, IL 60130.

Mercury Model 400 VOM capacity meter. Need schematic. Sam Schatz, 2233 E. Catalina 12, Santa Ana, CA 92701.


Soroc Model IQ 120 terminal with 100051 logic board and 100032-5 keyboard. Need schematics and service manual. Larry J. Kopiasz, 4545 Walnut, Omaha, NB 68106.

Conar Model 255 5" oscilloscope. Need schematic, parts list and any other information available. Clifford Malseed, 331 Penny St., McKeesport, PA 15132.

Roberts Model 420X tape recorder. Need playback head. Rev. Paul R. Beining, S.J., University of Scranton, Scranton, PA 18510.

Hammarlund Model HQ-180A vhf, 160-2 meter receiver and **Johnson Viking** ultraamplifier linear. Need manuals, schematics, alignment data and any other literature available.

PROBE-IT™ It's got a nose for trouble.

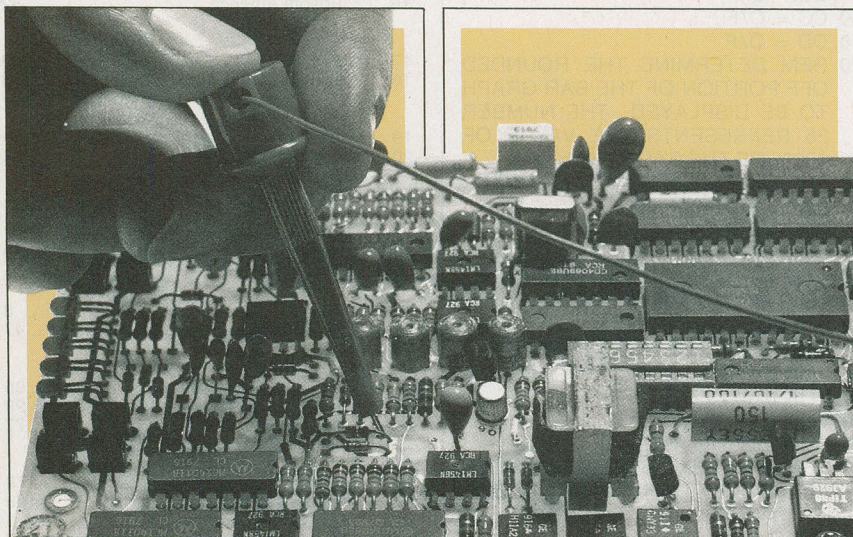


Probe-It™—the faster and easier way to test component leads. Just press the cap to extend the hook contact, place on the lead or wire and release for hands-free troubleshooting.

Probe-It is available in four sizes. MICRO Probe-It for testing high density boards, MINI Probe-It for general purpose testing, STANDARD Probe-It for higher power circuits and MAXI Probe-It which has an extra long tip for especially hard to reach leads. Micro and Mini Probe-Its available in six colors. Standard and Maxi Probe-Its available in red or black.

All Probe-It models can be soldered to ordinary stranded hook-up wire to make any length test lead required.

Call TOLL FREE, 800-321-9668, for the name of the distributor nearest you. (In Ohio, call collect: (216) 354-2101.)

New...from A P PRODUCTS



A P PRODUCTS INCORPORATED
9450 Pineneedle Drive
P.O. Box 603
Mentor, Ohio 44060
(216) 354-2101
TWX: 810-425-2250


In Europe, contact A P PRODUCTS GmbH
Baumlesweg 21 • D-7031 Weil 1 • W. Germany



7+11 SWD PARTS KITS

MITSUMI VARACTOR UHF TUNER Model UES-A56F **\$34.95**

Freq. Range UHF470 - 889MHz
Antenna Input 75 ohms
Channels 14-83 Output Channel 3




KIT NO	PART NO	DESCRIPTION	PRICE
1	VT1-SW	Varactor UHF Tuner, Model UES-A56F	\$34.95
2	CB1-SW	Printed Circuit Board, Pre-Drilled	18.95
3	TP7-SW	P.C.B. Potentiometers, 1-20K, 1-1K, and 5-10K ohms, 7-pieces	5.95
4	FR35-SW	Resistor Kit, 1/4 Watt, 5% Carbon Film, 32-pieces	4.95
5	PT1-SW	Power Transformer, PRI-117VAC, SEC-24VAC, 250ma	6.95
6	PP2-SW	Panel Mount Potentiometers and Knobs, 1-1KBT and 1-5KAT w/Switch	5.95
7	SS14-SW	IC's 7-pcs, Diodes 4-pcs, Regulators 2-pcs, Heat Sink 1-piece	29.95
8	CE9-SW	Electrolytic Capacitor Kit, 9-pieces	5.95
9	CC33-SW	Ceramic Disk Capacitor Kit, 50 W.V., 33-pieces	7.95
10	CT-SW	Variable Ceramic Trimmer Capacitor Kit, 5-65pfd, 8-pieces	5.95
11	L4-SW	Coil Kit, 18mhs 2-pieces, 22µhs 1-piece (prewound inductors) and 1 T37-12 Ferrite Toroid Core with 3 ft. of #26 wire	5.00
12	ICS-SW	I.C. Sockets, Tin inlay, 8-pin 5-pieces and 14-pin 2-pieces	1.95
13	SR-SW	Speaker, 4x6" Oval and Pre-punched Wood Enclosure	14.95
14	MISC-SW	Misc. Parts Kit Includes Hardware, (6/32, 8/32 Nuts, 8 Bolts), Hookup Wire, Ant. Terms, DPDT Ant. Switch, Fuse, Fuseholder, etc.	9.95
When Ordering All Items, (1 thru 14), Total Price			139.95

UHF ANTENNAS and ACCESSORIES

MDS-AMATEUR-ETV 32 ELEMENT YAGI ANTENNA


- NOT A KIT
- 1.9-2.5 GHz
- 38 1/2" LENGTH
- 23 dB AVERAGE GAIN
- DIE CAST WATERPROOF HOUSING WITH 4 1/8" x 2 1/2" AREA FOR ELECTRONICS
- COMMERCIAL GRADE
- INCLUDES MOUNTING HARDWARE

MAE-1 32 Element YAGI Antenna **\$19.95**



ZYZZX VHF-UHF WIDEBAND ANTENNA AMPLIFIER MODEL ALL-1

50 MHz — 900 MHz
12 dB GAIN ± 0.5dB



A Revolutionary New One Stage HYBRID IC Broadband Amplifier

This unit is not available anywhere else in the world. One unit serves many purposes and is available in Kit or Assembled form. Ideal for outdoor or indoor use. I/O impedance is 75 ohms. Amplifier includes separate co-ax feed power supply. Easily assembled in 25 minutes. No coils, capacitors etc. to tune or adjust.

ALL-1 Complete Kit with power supply \$24.95
ALL-1 Wired and Tested with power supply \$34.95

Our New STVA 14.5 dB GAIN, 14 ELEMENT CORNER REFLECTOR YAGI ANTENNA



STVA-3 Yagi Antenna,
14.5 dB, 75 ohm, Chan. 60-68 \$16.95

STVA-4 Yagi Antenna,
14.5 dB, 75 ohm, Chan. 44-52 \$16.95



STVA-1 Yagi Antenna, 11.5 dB, 75 ohm, Chan. 42-54 \$9.95

RG-59/U 75 ohm Low Loss Coax Cable \$.12 p/ft
F-59 Coaxial Connectors, ea39
MT-1 Special UHF 75-300 ohm Matching Transformer, ea 1.45

Switch to Bambi!™ Electronically

Bambi Electronic Video Switch ... makes switching of your VCR/VTR, Pay TV Decoders, Cable TV, Video Discs, Video Games, Closed Circuit TV, Antennae and Microcomputer as easy as pushing buttons.




The Bambi Electronic Video Switch is an electronic switching network which can accept up to six different sources of video signals and provide the flexibility of directing the inputs to any or all of the three outputs.

Now you can eliminate ... the drudgery of disconnecting and reconnecting your video equipment each time you use it ... the tangled mess of cables which are impossible to trace out ... not being able to use more than one function at a time.

Bambi lets you enjoy using your video equipment the way it should be ... electronically and on line at the push of a button.

Model
BEVS-1 Wired

\$129⁹⁵



Bambi's front panel was designed with the user in mind. Computer styled construction, with soft-touch keyboard (rated for over 10 million operations), arranged in matrix form allows easy input/output selection without referring to charts. Functions selected through the keyboard are immediately displayed on the 18 LED status indicators.

Check the quality of Bambi against that of much higher priced competition. All solid state electronic switching provides low attenuation (3dB), wide frequency response (40-890 MHz), and excellent isolation between signal sources (each I/O section individually shielded for 65dB min. isolation).

Bambi's Specifications:

- Input/Output Impedance 75 ohm
- Signal Loss 3dB ±1dB
- Noise 4dB ±1dB
- Input Return Loss 12dB min.
- Isolation 65dB min.
- Power Req. 117VAC 60 Hz, 2W
- Dimensions 10 1/4" W x 6 1/2" D x 3 1/4" H
- Weight 4 1/2 lbs

SWD-1 VIDEO CONVERTER

FOR CABLE TV



The SWD-1 Video Converter is utilized on cable TV systems to remove the KHz's signal from a distorted video (channel 3 in/out) and also pass thru the normal undistorted/detected audio signal. Rocker switch selects operating mode to remove KHz's distortion from the video or pass all other channels normally. Simple to assemble—less than 30 minutes. Pre-tuned. Input/output Channel 3. Impedance 75 ohms. 117VAC.

SWD-1 Video Converter Kit **\$69.95**

VTR ACCESSORIES

SIMPLE SIMON VIDEO STABILIZER



Simple Simon Video Stabilizer, Model VS-125, eliminates the vertical roll and jitter from "copy guard" video tapes when playing through large screen projectors or on another VTR. Simple to use, just adjust the lock control for a stable picture. Once the control is set, the tape will play all the way through without further adjustments. Includes 12V power supply.

VS-125 Video Stabilizer, wired **\$54.95**

SIMPLE SIMON VIDEO SWITCHING BOX



The Affordable Video Control Center

Excellent in isolation and no loss routing system. Simple Simons VSB-300 Video Switching Box enables you to bring a variety of video components together for easy viewing/dubbing. Also you gain the ability to record one channel while viewing another. Unit includes two F-type quick connector ended cables.

VSB-300 Video Switching Box, wired **\$19.95**

SIMPLE SIMON ELECTRONIC KITS,™ Inc.

3871 S. Valley View, Suite 12, Dept. P, Las Vegas, NV 89103

In Nevada Call: **702-871-2892**

1-800-782-3716

Outside Nevada Call:

7+11 PWD PARTS KITS

INTRODUCING OUR 7+11 PWD PARTS KITS



KIT NO	PART NO	DESCRIPTION	PRICE
1	1VT1-PWD	Varactor UHF Tuner, Model UES-A56F	\$34.95
2	2CB1-PWD	Printed Circuit Board, Pre-Drilled	18.95
3	3TP11-PWD	PCB Potentiometers 4-20K, 1-5K, 2-10K, 2-5K, 1-1K, and 1-50K (11 pieces)	8.95
4	4FR-31-PWD	Resistor Kit, 1/4W, 5% 29-pcs, 1/2 W 2-pcs	4.95
5	5PT1-PWD	Power Transformer, PRI-117VAC, SEC-24VAC at 500ma	9.95
6	6PP2-PWD	Panel Mount Potentiometers and Knobs, 1-1KBT and 1-5KAT with switch	5.95
7	7SS17-PWD	IC's 7-pcs, Diodes 4-pcs, Regulators 2-pcs	29.95
8	8CE14-PWD	Electrolytic Capacitor Kit, 14-pieces	6.95
9	9CC20-PWD	Ceramic Disk Capacitor Kit, 50 WV, 20-pcs	7.95
10	10CT5-PWD	Variable Ceramic Trimmer Capacitor, 5-65pfd, 5-pieces	4.95
11	11L5-PWD	Coil Kit, 18mhs 3-pcs, 22µhs 1-piece (prewound inductors) and 2 T37-12 Ferrite Toroid cores with 6 ft. #26 wire	6.00
12	12ICS-PWD	IC Sockets, Tin inlay, 8 pin 4-pcs, 14 pin 1-pc and 16 pin 2-pcs	2.95
13	13SR-PWD	Enclosure with PM Speaker and Pre-drilled Backpanel for mounting PCB and Ant. Terms	14.95
14	14MISC-PWD	Misc. Parts Kit, Includes Hardware, (6/32, 8/32 Nuts & Bolts), Hookup Wire, Solder, Ant. Terms DPDT Ant. Switch, Fuse, Fuseholder, etc.	9.95
15	15MC16-PWD	Mylar Capacitors, 14-pcs and Silver Mica Capacitors 2-pieces	7.95
When Ordering All Items, (1-15), Total Price			159.95

Available by Mail Order Only
Send Check* or Money Order. Minimum Order: \$16.95. Add 10% Shipping and Handling on orders under \$40.00. For orders over \$40.00, add 5%. Minimum Shipping and Handling \$2.00. Cat. \$1.00
VISA and Mastercard Acceptable —
*Check orders will be held 30 days before shipping.

operation assist

able. Donald R. Fonville, 1025 Valleydale Dr., Burlington, NC 27215.

Acrosound Model 120 stereo ultralinear amplifier. Need original owners manual. Steven Bender, Box 28360, Queens Village, NY 11428.

Galaxie III SSB amateur transceiver. Need circuit diagram. John DeVine, 127 Los Angeles Ave., Stratford, CT 06497.

Pioneer Model SX-600T AM/FM stereo receiver. Need schematic, parts list and layout. Torsten Isaacson, 65 Dellbrook Ct., Ofallon, MO 63366.

Dumont Model 304/304-H scope. Need power transformer. John P. Coleman, Box 174, Albany, GA 31702.

Heathkit Model HG 10B vfo. Need schematic and service manual. Robert Quade, 11354 Martin Rd., North East, PA 16428.

Micronta Model 22-012 tube tester. Need schematic. R.A. Balcerzak, 3153 So. 26th St. Milwaukee, WI 53215.

Incoterm Corporation 055-13-02-70 keyboard assembly. Need schematic or any information available. Graham Mott, 2 London Bridge, London SE1 9RB, England.

Currier Smith Model 10478-G01-001 telephone answerer. Need schematic and service literature. Frank B. McCarrison, 72 Antwerp St., Brighton, MA 02135.

Stark Model 9-11 tube tester. Need instruction manual and tube charts. Jack Marsden, 25 Springbrook Rd., Cobourg, Ontario K9A 4HB.

Barker & Williamson Model 410 distortion meter. Need service manual, schematic and operating instructions. William Bruhn, 5107 Throne Rd., Marengo, IL 60152.

Clarion Model JC-20 1E CB radio. Need 23 channel trans-

ceiver. Cicil F. Allen, 976 Bluebonnet Dr. Sunnyvale, CA 94086.

Supreme Model 599 set tester. Need schematic, operations manual, tube list and any other information. Erick Gulbrand, 1500 Woodland Terrace, Lake Oswego, OR 97034.

Pearce Simpson Bimini 50 marine radio. Need schematic and service manual. Ken Novicki, 237 Exchange St., New Haven, CT 06513.

Hallicrafters Model SX25 communications receiver. Need schematic, parts list and service manual. John Eroh, 1728-C Fir Court, Ft. Gordon, GA 30905.

Collins Model R390 receiver. Need technical manual L11-856. P. Spanu, 20 Dickinson Rd., Darien, CT 06820.

Hallicrafters Model S-38 receiver. Need instruction and

CABLE TV


CONVERTERS DESCRAMBLERS

Largest Selection
of Equipment Available
\$ Buy Warehouse Direct & Save \$



36 channel
converter
\$45⁹⁵

36 channel
wired remote
converter
only
\$88⁹⁵



Send \$2 for complete catalog
of converters and unscramblers

Quantity Discounts • Visa • Master Charge
Add 5% shipping—Mich. residents add 4% sales tax

C&D Electronics, Inc.
P.O. Box 21, Jenison, MI 49428
(616) 669-2440



SATELLITE — COMPUTER — TEST EQUIPMENT —

DISCRETE 70 MHz PLL — Replaces NE564 video demodulator without the need for an ECL divider. (70 MHz I.F.). Guaranteed tracking to 85 MHz. Wide bandwidth. Lower C/N, reduced 'tearing'. May be remotely tuned.

Kit (M82-010K) \$124.95
A & T (M82-010T) \$159.95

TUNEABLE AUDIO DEMODULATOR — Tunes from 5.4 to 8.2 MHz. Switchable 5 KHz LP filter for Canadian birds. Tuning diodes included. Two of these and a couple op-amps required for stereo. (MTV)

Bare Board (M81-020B) \$24.95
Two Boards (M81-021B) \$39.95

CANADIAN AUDIO DESCRAMBLER — Tune in those 'chirping' sub-carriers and hear what you've been missing.

Bare Board (R82-010B) \$24.95
Kit (R81-010K) \$59.95
A & T (R81-010T) \$94.95

LO—OHMS ADAPTOR — Adapts normal VOM or DVM to measure from 001 ohm to 5 ohms using single 9-volt battery. Super simple calibrations.

Kit (M82-100K) \$39.95
Kit (M82-100K) \$39.95
A & T (M82-100T) \$59.95

MODEM — Bell 103 (300 bps) compatible Answer/Originate modem. No acoustic coupler required. RS-232 serial I/O.

Bare Board (R81-100B) \$24.95
Kit (R81-100K) \$69.95
A & T (R81-100T) \$99.95

All prices include complete and comprehensive documentation, postage and handling. C.O.D. orders accepted. Call or write for catalog. Dealer inquiries invited.

DIGICOM ENGINEERING, INC.

P. O. Box 1656, KODIAK, ALASKA 99615
907-486-5118 907-486-6215
OPEN 10 AM TO 8 PM PST

DESIGNS IN CONSUMER ELECTRONICS
DC TO LIGHT

CIRCLE NO. 13 ON FREE INFORMATION CARD

NEW INDOOR ACTIVE ANTENNA

Covers 300 KHz - 30 MHz.
For SWL, BCL, VLF DXers.

Rivals long
wires

\$79⁹⁵
(+ \$4.00
shipping)



MFJ-1020 NEW INDOOR ACTIVE ANTENNA sits on your desk ready to listen to the world. Rivals, can often exceed, reception of outside long wire. Unique **Tuned Active Antenna** minimizes intermod, provides RF selectivity, reduces noise outside tuned band. Also use as preselector for external antenna. Covers 300 KHz to 30 MHz in 5 bands. Adjustable telescoping antenna. Controls: Tune, Band Selector, Gain, On-Off/Bypass. LED. FET, bipolar circuitry. Phono jack for external ant. 6x2x6 in. 9-12 VDC or 9 V battery for portable use. 110 VAC with optional AC adapter, MFJ-1312, \$9.95.

Order from MFJ and try it. If not delighted, return it within 30 days for refund (less shipping).

One year unconditional guarantee.

Order today. Call TOLL FREE 800-647-1800.

Charge VISA, MC. Or mail check, money order.

Write for free catalog.

CALL TOLL FREE ... 800-647-1800

601-323-5869 in MS, outside continental USA.

MFJ ENTERPRISES, INCORPORATED

921 Louisville Road, Starkville, MS 39759

CIRCLE NO. 30 ON FREE INFORMATION CARD

TRS-80™ by RADIO SHACK - BUY DIRECT-DISCOUNT PRICES

VIC-20
The friendly computer

PURE RADIO SHACK EQUIPMENT - FREE COPY OF WARRANTY UPON REQUEST

SCM SMITH-CORONA

TOLL
FREE 1-800-841-0860

TRS-80 Model II..... From '3098

TRS-80 Model 16..... From '4158

TRS-80 Color Computer. From '309

TRS-80 Model III..... From '609

Centronics 739-1..... '499

Smith Corona TP-1

Daisy Wheel Printer... '695

VIC-20 Computer..... '249



Thousands of Satisfied
Customers Since 1978

TM - Tandy Corporation

WE CARRY THE FULL
TRS-80 PRODUCT LINE
WRITE FOR FREE CATALOG
**MICRO MANAGEMENT
SYSTEMS, INC.**

PARCEL DIVISION - DEPT NO. 12

2803 Thomasville Road East

Cairo, Georgia 31728

GA. & INFO 912-377-7120

CIRCLE NO. 33 ON FREE INFORMATION CARD

POPULAR ELECTRONICS

service manuals. D.R. Wilson, 15075 Aster, Allen Park, MI 48101.

Hickok Model 670 oscilloscope. Need schematic and instruction manual. Gayne Jones, 10071 N.E. South Beach Dr., Bainbridge Island, WA 98110.

LFE Model 832 oscillator and sweeper. Need schematic

and manual. John Leary, 100 Dorman Rd., Oxford, CT 06483.

Compu-Time clock calculator card for the S-100 micro-computer bus. Need schematic and manual. Mark Harris, 4524 Alta Vista, Dallas, TX 75229.

Olivetti Model P602/P603 computer. Need board sche-


matic and repair manuals. D.N. Burks, 1951 W. 9th Ave., Apache Jct., AZ 85220.

Hallicrafters SX62 receiver. Need new dial scale. Carrol F. Harris, 5225 Rambler Way, Sacramento, CA 95841.

Thorens Model TD-124 turntable. Need outer aluminum platter. Joe Tenaglia, Box 1461, Boston, MA 02104. ◇



Audio Modules



MOSFET Power Amplifiers

*BUILT-IN HEATSINKS *ONLY 5 CONNECTIONS REQUIRED * 5 YEAR WARRANTY

Choose ILP MOSFET power amps when you need the utmost in performance without spending big money. They provide the fastest possible slew rate, low distortion at high frequencies, + better thermal stability. MOSFET power amps work with complex loads without difficulty and without crossover distortion. Three models are available, with integral heatsink to mount on your own chassis (optional rack mount cabinet available). Connection is simple — via 5 pins. MOSFETs can be combined with other ILP modules to create almost any audio system, whatever your age or experience.

Ultra-fi specifications: Slew rate 20V/us. Rise time 3 us. S/N ratio 100 db. Frequency response (-3 db) 15 Hz - 100 kHz. THD (Typical at 1kHz) < 0.005%. IMD (50Hz/7kHz 4:1) < 0.006%.

MOS120 60W/4-8Ω (requires ± 45V) \$79.95
MOS200 120W/4-8Ω (requires ± 55V) \$129.95
MOS400 240W/4Ω (requires ± 55V) \$199.95

WRITE FOR FREE CATALOGUE LISTING:
*BIPOLAR POWER AMPLIFIERS *HIFI PREAMPS
*MIXERS *POWER SUPPLY UNITS *CABINETS
*GUITAR PREAMP and more


GLADSTONE

Electronics 901 Fuhrmann Blvd., Buffalo, NY, 14203

CALL (716) 849-0735 to order. Have your VISA or MasterCard ready. For information call (416) 787-1448 or circle reader number. Dealer/OEM enquiries (416) 787-1488. In Canada: Gladstone Electronics, Toronto.

CIRCLE NO. 19 ON FREE INFORMATION CARD

Aaron-Gavin Kits

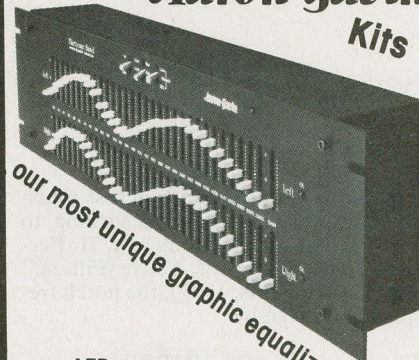

our most unique graphic equalizer!

LED meter




FEATURES
1 POSITION RANGE SWITCH -20dB -20dB
110 VOLT POWER SUPPLY
2000 LED DISPLAY
2000 LED DISPLAY
2000 LED DISPLAY

EQUALIZERS PRICED FROM \$119. to \$690.

LED METERS PRICES \$48. to \$219.

A Unique MIXER for DJ's — Studio's — Broadcaster's

Two MIC Inputs
Two AUX channels
Cue Mix - 12 units
3 Turntable Inputs
Talkover Switch
Crosstalk
ANY Channel
Beat Match
Subsonic Filters
Eleven Band Stereo EQUALIZER
Headphones
Monitor Switchable
Dual LED Meter

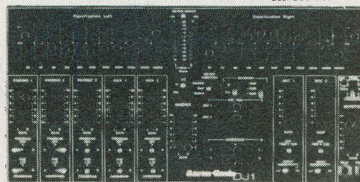

Call or write for full product information, and pricing to:

AaRON-GAVIN
123 South McClay Street, Unit F,
Santa Ana, CA 92701, (714) 957-8710

CIRCLE NO. 2 ON FREE INFORMATION CARD

SEE YOUR DEALER TODAY

FROM



HERE'S A TIP THAT'S PERFECT!

AM/FM AUTO RADIO AND CB

'Firestik' II GOLDEN SERIES

BARE-HANDS TUNABLE "NO TOOLS NEEDED" HIGH PERFORMANCE ANTENNAS

ALSO ANTENNAS FOR CORDLESS TELEPHONES MONITOR SCANNERS

Dealer & Distributor Inquiries Invited
SEND FOR FREE CATALOG

'Firestik' Antenna Company
2614 East Adams/Phoenix, AZ 85034

Name _____
Street _____
City _____
State _____ Zip _____

Serving the CB and Communications Market Since 1962.

5-YEAR REPLACEMENT WARRANTY

CIRCLE NO. 17 ON FREE INFORMATION CARD

"...strikingly balanced, uncolored sound..."

—Stereo Review



DA-30 Stereo-trio System

"...delivers wall-shaking sound... driven by a good 30-watt-per-channel amplifier."

"...the blending of the DA20LF with the DA-10 satellites was exceptionally effective."

"...no one could suspect...that a common-bass module was present."

"...a most attractive system..."
Read the entire review and hear the exciting DA-30 Stereo-trio at your Design Acoustics dealer today!

DA DESIGN ACOUSTICS
An Audio-Technica Company

PROJECT OF THE MONTH

By Forrest M. Mims

A Tunable Notch Filter

SOMETIMES signals within a narrow frequency range interfere with the operation of an electronic circuit. The best known of these interfering signals is 60-Hz line noise. Shortwave radio listeners often find that a broadcast they are attempting to monitor is partially masked by an annoying tone.

Figure 1 shows a passive filter that can be tuned to reject or block a narrow band of audio frequencies. Such a circuit is called a *band-rejection filter*, *band-stop filter*, or *notch filter*. The particular filter in Fig. 1 is called a *bridged differentiator tunable notch filter*. It is easier to adjust than the better known twin-tee (or twin-T) notch filter.

The filter in Fig. 1 uniformly attenuates frequencies outside its band-stop region by about 4.1 dB (i.e. about 48% of a non-band-stop frequency is blocked). This loss can be virtually eliminated by following the filter with an op amp to form an *active* notch filter as shown in Fig. 2. This circuit has a uniform attenuation outside its stop band of only 0.4 dB (i.e. about 5% attenuation).

I measured this attenuation with the help of a signal generator, oscilloscope, and a breadboard version of the active filter. When potentiometer $R1$, $R2$ was adjusted so that $R1 = R2 = 50$ kilohms, then the notch frequency was 1431 Hz. The signal from the filter at points outside the stop band had an amplitude of 2.75 V. At the bottom of the notch the signal's amplitude was 0.15 V. This represents an attenuation of $0.15/2.75$ or 94.5%.

Many engineers prefer to express such relationships in terms of decibels. In this case, the attenuation in decibels is $20\log(V_{out}/V_{in})$. Therefore, the attenuation is $20\log(0.055)$ or -25.27 decibels.

Figure 3 is a plot of the frequency response of the circuit in Fig. 2 when it has been adjusted for a stop-band centered at 1431 Hz. Note that the slope of the notch is much sharper on the low-frequency side. Also note that the amplitude axis of the graph has a linear scale. Often such frequency-response curves are plotted on a logarithmic scale.

The notch frequency of the circuit in

Fig. 2 can be easily tuned across much of the audio spectrum. According to various texts about filters (e.g. H. Berlin's "The Design of Active Filters," E&L Instruments, 1977), the notch frequency is given by

$$F_{notch} = 1/2\pi C\sqrt{3R1R2}$$

However, inserting the values for the circuit in Fig. 2 when $R1 = R2 = 50$ kilohms gives a predicted notch frequency of 1838 Hz. Recall from above that the actual notch frequency I measured was 1431 Hz.

Similarly, when $R1$ is 10 kilohms and $R2$ is 90 kilohms, the equation predicts a notch frequency of 3063 Hz. However, I measured an actual notch frequency of 2334 Hz.

These discrepancies are likely due to tolerance variations in all three capacitors, and $R3$ in the test circuit. For opti-

mum results, $C1$, $C2$ and $C3$ should have exactly equal values. Likewise, the resistance of $R3$ should be exactly six times the resistance of $R1 + R2$.

The attenuation at higher frequencies is not as sharp. At 10 kHz, for example, the amplitude at the notch frequency was 13.4 dB below the out-of-notch frequencies.

Incidentally, I connected the circuit in Fig. 2 between my shortwave receiver and an external power amplifier in an effort to tune out annoying interference tones. If the frequency of the interfering tone was steady, the filter did indeed greatly reduce its amplitude. I also found that the filter is ideal for attenuating the shrill tone from a piezoelectric alerter being operated in a room monitored by an intercom. This permits the intercom to be comfortably monitored without the annoyance of the alerter's tone. \diamond

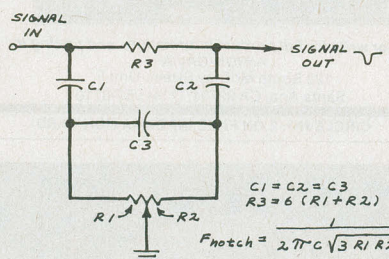


Fig. 1. A passive bridged, differentiator tunable notch filter.

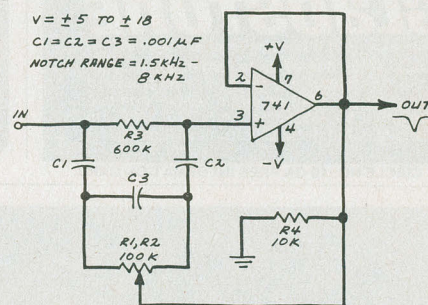


Fig. 2. Circuit for an active tunable notch filter.

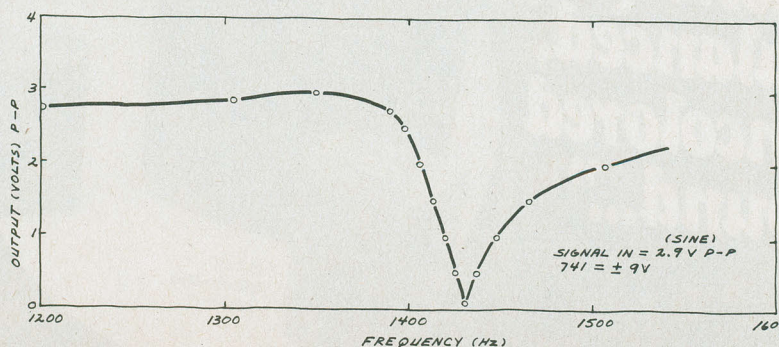


Fig. 3. A plot of the notch for circuit shown in Fig. 2.

4116 16K DYNAMIC 250NS **8/\$11⁹⁵** SET **2114** 1KX4 STATIC LOW POWER 200NS **8/\$15⁹⁵** SET

ALL MERCHANDISE 100% GUARANTEED!

CALL US FOR VOLUME QUOTES

STATIC RAMS

			Each	100 pcs
2101	256 x 4	(450ns)	1.95	1.85
5101	256 x 4	(cmos) (450ns)	4.95	3.95
2102-1	1024 x 1	(450ns)	.89	.85
2102L-2	1024 x 1	(LP) (250ns)	1.69	1.55
2102L-4	1024 x 1	(LP) (450ns)	1.29	1.15
2111	256 x 4	(450ns)	2.99	2.49
2112	256 x 4	(450ns)	2.99	2.79
2114	1024 x 4	(450ns)	8/16.95	1.95
2114L-2	1024 x 4	(LP) (200ns)	8/15.95	1.90
2114L-3	1024 x 4	(LP) (300ns)	8/18.95	2.25
2114L-4	1024 x 4	(LP) (450ns)	8/17.95	2.10
2147	4096 x 1	(55ns)	9.95	call
TMS4044-4	4096 x 1	(450ns)	3.49	3.25
TMS4044-3	4096 x 1	(300ns)	3.99	3.75
TMS4044-2	4096 x 1	(200ns)	4.49	4.25
MK4118	1024 x 8	(250ns)	9.95	call
TMM2016	2048 x 8	(150ns)	call	call
HM6116-4	2048 x 8	(cmos) (200ns)	call	call
HM6116-3	2048 x 8	(cmos) (150ns)	call	call
HM6116-2	2048 x 8	(cmos) (120ns)	call	call
HM6116LP-4	2048 x 8	(LP) (cmos) (200ns)	call	call
HM6116LP-3	2048 x 8	(LP) (cmos) (150ns)	call	call
HM6116LP-2	2048 x 8	(LP) (cmos) (120ns)	call	call
Z-6132	4096 x 8	(Qstat) (300ns)	34.95	call

LP = Low Power Qstat = Quasi-Static

Z-80

2.5 Mhz

Z80-CPU	6.00
Z80-CTC	5.95
Z80-DART	15.25
Z80-DMA	17.50
Z80-PIO	6.00
Z80-SIO/0	18.50
Z80-SIO/2	18.50
Z80-SIO/9	16.95

4.0 Mhz

Z80A-CPU	6.00
Z80A-CTC	8.65
Z80A-DART	18.75
Z80A-DMA	27.50
Z80A-PIO	6.00
Z80A-SIO/0	22.50
Z80A-SIO/1	22.50
Z80A-SIO/2	22.50
Z80A-SIO/9	19.95

6.0 Mhz

Z80B-CPU	17.95
Z80B-CTC	15.50
Z80B-PIO	15.50

ZILOG

Z6132	34.95
Z8671	39.95

8200

8202	34.95
8205	3.50
8212	1.85
8214	3.85
8216	1.80
8224	2.50
8226	1.80
8228	4.90
8237	19.95
8238	4.95
8243	4.45
8250	14.95
8251	4.75
8253	9.25
8253-5	9.85
8255	4.75
8255-5	5.25
8257	8.50
8257-5	8.95
8259	6.90
8259-5	7.50
8272	39.95
8275	29.95
8279	9.50
8279-5	10.00
8282	6.65
8283	6.65
8284	5.70
8286	6.65
8287	6.50
8288	25.00
8289	49.95

8000

8035	7.25
8039	7.95
INS-8060	17.95
INS-8073	29.95
8080	3.95
8085	7.95
8085A-2	11.95
8086	59.95
8088	39.95
8089	89.95
8155	7.95
8156	8.95
8185	29.95
8185-2	39.95
8741	39.95
8748	29.95
8755	32.00

6800

68000	call
6800	4.95
6802	10.95
6808	13.90
6809E	19.95
6809	19.95
6810	2.95
6820	4.95
6821	4.95
6828	14.95
6840	12.95
6843	34.95
6844	25.95
6845	16.95
6847	12.25
6850	3.45
6852	5.75
6860	10.95
6862	11.95
6875	6.95
6880	2.95
6883	24.95
68047	24.95
68488	19.95
6800 = 1MHZ	
68B00	10.95
68B02	22.25
68B09E	29.95
68B09	29.95
68B10	7.95
68B21	12.95
68B45	35.95
68B50	12.95
68B00 = 2 MHZ	

DYNAMIC RAMS

			Each	100 pcs
TMS4027	4096 x 1	(250ns)	2.50	2.00
MK4108	8192 x 1	(200ns)	1.95	call
MM5298	8192 x 1	(250ns)	1.85	call
4116-120	16384 x 1	(120ns)	8/29.95	call
4116-150	16384 x 1	(150ns)	8/18.95	1.95
4116-200	16384 x 1	(200ns)	8/13.95	call
4116-250	16384 x 1	(250ns)	8/11.95	call
4116-300	16384 x 1	(300ns)	8/13.80	call
2118	16384 x 1	(5v) (150ns)	4.95	call
MK4816	2048 x 8	(5v) (300ns)	24.95	call
4164-200	65536 x 1	(5v) (200ns)	call	call
4164-150	65536 x 1	(5v) (150ns)	call	call

EPROMS

			Each	8 pcs
1702	256 x 8	(1us)	4.95	4.50
2708	1024 x 8	(450ns)	3.75	3.50
2758	1024 x 8	(5v) (450ns)	9.95	8.95
TMS2516	2048 x 8	(5v) (450ns)	6.95	5.95
2716	2048 x 8	(5v) (450ns)	4.95	3.95
2716-1	2048 x 8	(5v) (350ns)	9.00	8.50
TMS2716	2048 x 8	(450ns)	9.95	8.95
TMS2532	4096 x 8	(5v) (450ns)	9.95	7.95
2732	4096 x 8	(5v) (450ns)	9.95	7.95
2732A-2	4096 x 8	(5v) (200ns)	call	call
2764	8192 x 8	(5v) (450ns)	call	call
TMS2564	8192 x 8	(5v) (450ns)	call	call

5v = Single 5 Volt Supply

EPROM ERASERS

	Timer	Capacity Chip	Intensity (uW/V ²)	
PE-14		6	5,200	83.00
PE-14T	X	6	5,200	119.00
PE-24T	X	9	6,700	175.00
PL-265T	X	20	6,700	255.00
PR-125T	X	16	15,000	349.00
PR-320T	X	32	15,000	595.00

ORDER TOLL FREE

800-538-5000

800-662-6279

(CALIFORNIA RESIDENTS)

IF YOU CAN FIND A PRICE LOWER ELSEWHERE, LET US KNOW AND WE WILL BEAT THEIR PRICE.

- ★ Computer managed inventory—virtually no back orders.
- ★ Guaranteed lowest prices!
- ★ Fast service — most orders shipped within 24 hours!

AUGUST SPECIALS

SA-400L(NEW)..... 199.95

1771 20.95 MM58167 8.95

1791 29.95 MSM5832 6.95

1793 38.95 32.768 CRYSTAL .. 1.95

68000-8MHZ 99.95

SMALL BYPASS CAPS

.01uf DISC ... 100/ 6.00

.1uf DISC 100/ 8.00

.1uf MONO ... 100/15.00

TV BUILDERS

MC1330 .. 1.49

MC1350 .. 1.19

MC1358 .. 1.39

LM1800 .. 1.99

DISC CONTROLLERS

1771	21.95
1791	29.95
1793	38.95
1795	54.95
1797	54.95
6843	34.95
8272	39.95
UPD765	39.95
1691	18.95
2143	18.95

INTERFACE

8T26	1.69
8T28	2.49
8T95	.99
8T96	.99
8T97	.99
8T98	.99
DM8131	2.95
DP8304	2.29

MISC

3341	4.95
76477	3.95
AY3-8910	12.95
MC3340	1.49
95H90	7.99
11C90	13.95
8202A	34.95
3242	7.95
MC3480	9.00
MC4024	3.95
MC4044	4.50
3205	3.50

BIT-RATE GENERATORS

14411	11.95
BR1941	11.95
4702	12.95
COM5016	16.95
MM5307	10.95

UARTS

AY3-1014	6.95
AY5-1013	3.95
PT1472	9.95
TR1602	3.95
2350	9.95
TMS6011	5.95
IM6402	7.95
IM6403	8.95
INS8250	14.95

KEYBOARD CHIPS

AY5-2376	11.95
AY5-3600	11.95
74C922	5.25
74C923	5.50

CLOCK CIRCUITS

MM5314	4.95
MM5369	3.95
MM5375	4.95
MM58167	8.95
MM58174	11.95
MSM5832	6.95

CRYSTALS

32.768 khz	1.95
1.0 mhz	4.95
1.8432	4.95
2.0	3.95
2.097152	3.95
2.4576	3.95
3.2768	3.95
3.579535	3.95
4.0	3.95
5.0	3.95
5.0688	3.95
5.185	3.95
5.7143	3.95
6.0	3.95
6.144	3.95
6.5536	3.95
8.0	3.95
10.0	3.95
14.31818	3.95
15.0	3.95
16.0	3.95
18.0	3.95
18.432	3.95
20.0	3.95
22.1184	3.95
32.0	3.95



JDR MICRODEVICES, INC.

1224 S. Bascom Avenue

San Jose, CA 95128

800-538-5000 • 800-662-6279 (CA)

(408) 995-5430 • Telex 171-110

HOURS: Mon. - Fri., 9 to 5; Sat. 11 to 3

VISIT OUR RETAIL STORE!

TERMS: For shipping include \$2.00 for UPS Ground, \$3.00 for UPS Blue Label Air. \$10.00 minimum order. Bay Area residents add 6 1/2% sales tax. California residents add 6% sales tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.

2716 16K EPROMS **8/\$3⁹⁵** EACH

ALL MERCHANDISE 100% GUARANTEED!

2732 32K EPROMS **8/\$7⁹⁵** EACH

CALL US FOR VOLUME QUOTES

74LS00

74LS00	.25	74LS85	1.15	74LS168	1.75	74LS295	1.05
74LS01	.25	74LS86	.40	74LS169	1.75	74LS298	1.20
74LS02	.25	74LS90	.65	74LS170	1.75	74LS324	1.75
74LS03	.25	74LS91	.89	74LS173	.80	74LS352	1.55
74LS04	.25	74LS92	.70	74LS174	.95	74LS353	1.55
74LS05	.25	74LS93	.65	74LS175	.95	74LS363	1.35
74LS08	.35	74LS95	.85	74LS181	2.15	74LS364	1.95
74LS09	.35	74LS96	.95	74LS189	9.95	74LS365	.95
74LS10	.25	74LS107	.40	74LS190	1.00	74LS366	.95
74LS11	.35	74LS109	.40	74LS191	1.00	74LS367	.70
74LS12	.35	74LS112	.45	74LS192	.85	74LS368	.70
74LS13	.45	74LS113	.45	74LS193	.95	74LS373	1.75
74LS14	1.00	74LS114	.50	74LS194	1.00	74LS374	1.75
74LS15	.35	74LS122	.45	74LS195	.95	74LS377	1.45
74LS20	.25	74LS123	.95	74LS196	.85	74LS378	1.18
74LS21	.35	74LS124	2.99	74LS197	.85	74LS379	1.35
74LS22	.25	74LS125	.95	74LS221	1.20	74LS385	1.90
74LS26	.35	74LS126	.85	74LS240	1.29	74LS386	.65
74LS27	.35	74LS132	.75	74LS241	1.29	74LS390	1.90
74LS28	.35	74LS136	.55	74LS242	1.85	74LS393	1.90
74LS30	.25	74LS137	.99	74LS243	1.85	74LS395	1.65
74LS32	.35	74LS138	.75	74LS244	1.29	74LS399	1.70
74LS33	.55	74LS139	.75	74LS245	1.90	74LS424	2.95
74LS37	.55	74LS145	1.20	74LS247	.75	74LS447	.37
74LS38	.35	74LS147	2.49	74LS248	1.25	74LS490	1.95
74LS40	.35	74LS148	1.35	74LS249	.99	74LS624	3.99
74LS42	.55	74LS151	.75	74LS251	1.30	74LS668	1.69
74LS47	.75	74LS153	.75	74LS253	.85	74LS669	1.89
74LS48	.75	74LS154	2.35	74LS257	.85	74LS670	2.20
74LS49	.75	74LS155	1.15	74LS258	.85	74LS674	9.65
74LS51	.25	74LS156	.95	74LS259	2.85	74LS682	3.20
74LS54	.35	74LS157	.75	74LS260	.65	74LS683	2.30
74LS55	.35	74LS158	.75	74LS266	.55	74LS684	2.40
74LS63	1.25	74LS160	.90	74LS273	1.65	74LS685	2.40
74LS73	.40	74LS161	.95	74LS275	3.35	74LS688	2.40
74LS74	.45	74LS162	.95	74LS279	.55	74LS689	2.40
74LS75	.50	74LS163	.95	74LS280	1.98	74LS783	24.95
74LS76	.40	74LS164	.95	74LS283	1.00	81LS95	1.69
74LS78	.50	74LS165	.95	74LS290	1.25	81LS96	1.69
74LS83	.75	74LS166	2.40	74LS293	1.85	81LS97	1.69
						81LS98	1.69

WE HAVE

- ★ 74C00
- ★ 74S00
- ★ TRANSISTORS
- ★ 7400
- ★ LINEAR
- ★ ... and much more!

DISKETTES

5 1/4"

ANTHANA SS SD SOFT	24.95
WABASH SS SD SOFT	24.95
VERBATIM SS SD SOFT	29.95
VERBATIM 10 SECTOR HARD	29.95

8"

VERBATIM SS SD SOFT	44.95
---------------------	-------

MONITORS

ZENITH ZVM-121

\$119.95
NEC JB-1201M
\$169.00

APPLE FAN

\$69.00

- ★ Outlet on rear.
- ★ Simply snap over air vents.
- ★ Quiet motor.

EPSON PRINTERS

MX-80
 MX-80FT
 MX-100

CALL FOR PRICE

LINEAR

LM301V	.34	LM1800	2.99
LM308V	.98	LM1889	2.49
LM309K	1.49	LM3900	.59
LM311	.64	LM3909V	.98
LM317T	1.95	LM3914	3.95
LM317K	3.95	LM3915	3.95
LM318	1.49	LM3916	3.95
LM323K	4.95	75451V	.39
LM324	.59	75452V	.39
LM337K	3.95	75453V	.39
LM339	.99		
LM377	2.29		
LM380	1.29	TL071	.79
LM386V	1.50	TL072	1.19
LM555V	.39	TL074	2.19
LM556	.69	TL081	.79
LM565	.99	TL082	1.19
LM566V	1.49	TL083	1.19
LM567V	1.29	TL084	2.19
LM723	.49	LF347	2.19
LM733	.98	LF351	.60
LM741V	.29	LF353	1.00
LM747	.79	LF355	1.10
LM748V	.59	LF356	1.10
LM1310	2.90	LF357	1.40
MC1330V	1.89		
MC1350V	1.29		
MC1358	1.79	XR 2206	3.75
LM1414	1.59	XR 2207	3.85
LM1458V	.69	XR 2208	3.90
LM1488	.99	XR 2211	5.25
LM1489	.99	XR 2240	3.25

EXAR

VOLTAGE REGULATORS

7805T	.89	7905T	.99
7808T	.89	7908T	.99
7812T	.89	7912T	.99
7815T	.89	7915T	.99
7824T	.89	7924T	.99
7805K	1.39	7905K	1.49
7812K	1.39	7912K	1.49
7815K	1.39	7915K	1.49
7824K	1.39	7924K	1.49
78L05	.69	79L05	.79
78L12	.69	79L12	.79
78L15	.69	79L15	.79

T = TO-220 K = TO-3
 L = TO-92

IC SOCKETS

	1-99	100
8 pin ST	.13	.11
14 pin ST	.15	.12
16 pin ST	.17	.13
18 pin ST	.20	.18
20 pin ST	.29	.27
22 pin ST	.30	.27
24 pin ST	.30	.27
28 pin ST	.40	.32
40 pin ST	.49	.39

ST = SOLDER TAIL
 WW = WIREWRAP

CONNECTORS

RS232 MALE	3.25
RS232 FEMALE	3.75
RS232 HOOD	1.25
S-100 ST	3.95
S-100 WW	4.95

DIP SWITCHES

4 POSITION	.85
5 POSITION	.90
6 POSITION	.90
7 POSITION	.95
8 POSITION	.95

LED LAMPS

	1-99	100-up
Jumbo Red	.10	.09
Jumbo Green	.18	.15
Jumbo Yellow	.18	.15

CMOS

4000	.35	4071	.30
4001	.35	4072	.30
4002	.25	4073	.30
4006	.95	4075	.30
4007	.29	4076	.95
4008	.95	4078	.30
4009	.45	4081	.30
4010	.45	4082	.30
4011	.35	4085	.95
4012	.25	4086	.95
4013	.45	4093	.95
4014	.95	4098	2.49
4015	.95	4099	1.95
4016	.45	14409	12.95
4017	1.15	14410	12.95
4018	.95	14411	11.95
4019	.45	14412	12.95
4020	.95	14419	4.95
4021	.95	4502	.95
4022	1.15	4503	.65
4023	.35	4508	1.95
4024	.75	4510	.95
4025	.35	4511	.95
4026	1.65	4512	.95
4027	.65	4514	1.25
4028	.80	4515	2.25
4029	.95	4516	1.55
4030	.45	4518	1.25
4034	2.95	4519	1.25
4035	.85	4520	1.25
4040	.95	4522	1.25
4041	1.25	4526	1.25
4042	.75	4527	1.95
4043	.85	4528	1.25
4044	.85	4531	.95
4046	.95	4532	1.95
4047	.95	4538	1.95
4049	.55	4539	1.95
4050	.55	4543	2.70
4051	.95	4555	.95
4053	.95	4556	.95
4060	1.45	4581	1.95
4066	.75	4582	1.95
4068	.40	4584	.95
4069	.35	4584	.95
4070	.35	4072	12.95

CALL US FOR
 YOUR 74C00
 REQUIREMENTS

ADD ON DISK DRIVE FOR Apple* II

- ★ Includes metal cabinet
- ★ Color matches Apple*
- ★ 35 Tracks/single side
- ★ Includes cable
- ★ Use with Apple* II Controller

\$375⁰⁰

*Apple is a trademark of APPLE COMPUTER INC.

16K APPLE* RAM CARD

- ★ Upgrade your 48K Apple* II to full 64K of RAM.
- ★ Fully software and hardware compatible with the Apple language card and microsoft Z80 card.
- ★ Eliminates the need for the Apple-soft or Integer Basic ROM card when used in conjunction with DOS 3.3.
- ★ Allows you to run Apple Fortran or Pascal with no difficulty.
- ★ Available as bare board, kit, or assembled and tested board.

BARE BOARD \$40.00
 KIT 69.96
 ASSEMBLED & TESTED ... 74.95
 *Apple is a trademark of APPLE COMPUTER INC.

JDR MICRODEVICES, INC.

1224 S. Bascom Avenue
 San Jose, CA 95128

800-538-5000 • 800-662-6279 (CA)
 (408) 995-5430 • Telex 171-110

CIRCLE NO. 27 ON FREE INFORMATION CARD

HOURS: Mon. - Fri., 9 to 5; Sat. 11 to 3

VISIT OUR RETAIL STORE!

TERMS: For shipping include \$2.00 for UPS Ground, \$3.00 for UPS Blue Label Air. \$10.00 minimum order. Bay Area residents add 6 1/2% sales tax. California residents add 6% sales tax. We reserve the right to limit quantities and substitute manufacturer. Prices subject to change without notice. Send SASE for complete list.



MICROPROCESSOR COMPONENTS

SN7400N	.20	SN7428N	.29	SN74165N	.79
SN7401N	.20	SN7473N	.35	SN74157N	.69
SN7402N	.25	SN7474N	.35	SN74160N	.89
SN7403N	.25	SN7475N	.49	SN74161N	.89
SN7404N	.25	SN7476N	.35	SN74162N	.89
SN7405N	.25	SN7477N	5.00	SN74163N	.89
SN7406N	.35	SN7480N	.50	SN74164N	.89
SN7407N	.35	SN7482N	.99	SN74165N	.89
SN7408N	.29	SN7483N	.69	SN74166N	1.25
SN7409N	.29	SN7484N	.89	SN74172N	.79
SN7410N	.25	SN7486N	.35	SN74170N	1.95
SN7411N	.29	SN7489N	1.75	SN74172N	.45
SN7412N	.35	SN7490N	.49	SN74173N	1.39
SN7413N	.29	SN7491N	.59	SN74174N	.99
SN7414N	.69	SN7492N	.45	SN74175N	.79
SN7416N	.29	SN7493N	.45	SN74176N	.79
SN7417N	.29	SN7494N	.69	SN74177N	.79
SN7420N	.25	SN7495N	.69	SN74179N	1.49
SN7421N	.25	SN7496N	.69	SN74180N	1.25
SN7422N	.45	SN7497N	3.00	SN74181N	2.25
SN7423N	.29	SN74100N	1.49	SN74182N	.79
SN7426N	.29	SN74104N	.89	SN74184N	2.49
SN7427N	.25	SN74105N	.89	SN74185N	.89
SN7427N	.25	SN74107N	.35	SN74186N	.89
SN7428N	.49	SN74109N	.39	SN74191N	1.25
SN7430N	.25	SN74116N	1.95	SN74192N	.89
SN7432N	.29	SN74121N	.99	SN74193N	.89
SN7433N	.25	SN74122N	.55	SN74194N	.89
SN7438N	.40	SN74123N	.59	SN74195N	.69
SN7439N	.25	SN74125N	.49	SN74196N	.89
SN7440N	.20	SN74126N	.49	SN74197N	.89
SN7441N	.25	SN74132N	.75	SN74198N	.89
SN7442N	.59	SN74136N	.75	SN74199N	1.49
SN7443N	1.10	SN74141N	.99	SN74221N	1.25
SN7444N	1.10	SN74142N	3.25	SN74251N	.95
SN7445N	.69	SN74143N	3.49	SN74263N	1.95
SN7446N	.69	SN74144N	3.49	SN74264N	1.95
SN7447N	.69	SN74145N	.79	SN74276N	.89
SN7448N	.79	SN74147N	1.95	SN74284N	3.95
SN7450N	.20	SN74148N	1.29	SN74285N	.95
SN7451N	.25	SN74150N	1.25	SN74286N	.69
SN7453N	.20	SN74151N	.69	SN74366N	.69
SN7454N	.20	SN74152N	.69	SN74367N	.69
SN7459A	.25	SN74153N	.79	SN74368N	.69
SN7460N	.25	SN74154N	1.25	SN74369N	.69
SN7470N	.29	SN74155N	.69	SN74370N	1.49

74LS00	29			74LS192	1.15
74LS01	29			74LS193	1.15
74LS02	29			74LS194	1.15
74LS03	29			74LS195	1.15
74LS04	35			74LS197	1.15
74LS05	35			74LS221	1.19
74LS06	35			74LS240	1.49
74LS07	35			74LS241	1.49
74LS09	35			74LS242	1.49
74LS10	35			74LS243	1.49
74LS11	35			74LS244	1.49
74LS12	35			74LS245	2.35
74LS13	59			74LS247	1.19
74LS14	35			74LS249	1.19
74LS15	59			74LS250	1.19
74LS16	35			74LS251	1.19
74LS17	35			74LS252	1.19
74LS18	35			74LS253	1.19
74LS19	35			74LS257	.89
74LS20	35			74LS258	.89
74LS21	35			74LS260	.89
74LS22	35			74LS266	.89
74LS23	35			74LS267	.89
74LS24	35			74LS268	.89
74LS25	35			74LS269	.89
74LS26	35			74LS270	.89
74LS27	35			74LS271	.89
74LS28	35			74LS272	.89
74LS29	35			74LS273	.89
74LS30	35			74LS279	.89
74LS31	35			74LS280	.89
74LS32	35			74LS290	.99
74LS33	59			74LS293	.99
74LS34	59			74LS294	.99
74LS35	59			74LS295	.99
74LS36	35			74LS302	1.29
74LS37	35			74LS303	1.29
74LS38	35			74LS304	1.15
74LS39	35			74LS305	1.15
74LS40	35			74LS306	1.15
74LS41	35			74LS307	1.15
74LS42	35			74LS308	1.15
74LS43	35			74LS309	1.15
74LS44	35			74LS310	1.15
74LS45	35			74LS311	1.15
74LS46	35			74LS312	1.15
74LS47	35			74LS313	1.15
74LS48	35			74LS314	1.15
74LS49	35			74LS315	1.15
74LS50	35			74LS316	1.15
74LS51	35			74LS317	1.15
74LS52	35			74LS318	1.15
74LS53	35			74LS319	1.15
74LS54	35			74LS320	1.15
74LS55	35			74LS321	1.15
74LS56	35			74LS322	1.15
74LS57	35			74LS323	1.15
74LS58	35			74LS324	1.15
74LS59	35			74LS325	1.15
74LS60	35			74LS326	1.15
74LS61	35			74LS327	1.15
74LS62	35			74LS328	1.15
74LS63	35			74LS329	1.15
74LS64	35			74LS330	1.15
74LS65	35			74LS331	1.15
74LS66	35			74LS332	1.15
74LS67	35			74LS333	1.15
74LS68	35			74LS334	1.15
74LS69	35			74LS335	1.15
74LS70	35			74LS336	1.15
74LS71	35			74LS337	1.15
74LS72	35			74LS338	1.15
74LS73	35			74LS339	1.15
74LS74	35			74LS340	1.15
74LS75	35			74LS341	1.15
74LS76	35			74LS342	1.15
74LS77	35			74LS343	1.15
74LS78	35			74LS344	1.15
74LS79	35			74LS345	1.15
74LS80	35			74LS346	1.15
74LS81	35			74LS347	1.15

AS00	.35	74S/PROMS*	74S93	2.25
AS01	.35		74S244	2.25
AS03	.35	74S124	74S251	.99
AS04	.35	74S133	74S253	.99
AS05	.35	74S134	74S257	.99
AS06	.35	74S135	74S258	.99
AS08	.40	74S136	74S260	2.25
AS10	.35	74S138	74S287*	1.95
AS11	.35	74S139	74S288*	1.95
AS15	.35	74S140	74S373	2.49
AS20	.35	74S151	74S374	2.49
AS21	.35	74S153	74S387*	1.95
AS30	.35	74S157	74S471*	5.95
AS32	.45	74S158	74S472*	5.95
AS38	.89	74S160	74S473*	5.95
AS40	.40	74S174	74S475*	7.99
AS43	.35	74S175	74S570*	1.95
AS64	.40	74S188*	74S571*	5.95
AS65	.40	74S194	74S572*	4.49
AS74	.55	74S195	74S573*	4.49
AS86	.55	74S196	74S574*	4.95
AS102	.55	74S240	74S590	1.95
AS113	.55	74S241	74S591	1.95
AS114	.55	74S242	74S594	1.95

CA3010H	.99	CA-3010H	CA3089N	3.75
CA3013H	2.15	CA3089N	CA3096N	3.75
CA3023H	3.25	CA3089N	CA3130H	.99
CA3029H	2.49	CA3096N	CA3130H	1.29
CA3031H	1.35	CA3096N	CA3160H	1.29
CA3033H	1.35	CA3096N	CA3160H	1.29
CA3046N	1.35	CA3096N	CA3600N	3.75
CA3059N	3.25	CA3096N		
CD4000	.39	CD-4000	CD4028	2.49
CD4001	.39	CD4001	CD4056	.75
CD4002	.39	CD4002	CD4507	.99
CD4003	1.19	CD4003	CD4508	3.95
CD4007	.25	CD4007	CD4510	1.39
CD4009	.49	CD4009	CD4511	1.29
CD4010	.49	CD4010	CD4512	1.49
CD4011	.39	CD4011	CD4513	3.95
CD4012	.25	CD4012	CD4515	2.95
CD4013	.49	CD4013	CD4515	2.95
CD4014	1.39	CD4014	CD4518	1.79
CD4015	1.19	CD4015	CD4519	.89
CD4016	.59	CD4016	CD4520	1.29
CD4017	1.19	CD4017	CD4521	1.29
CD4018	.99	CD4018	CD4528	1.79
CD4019	.49	CD4019	CD4541	2.79
CD4020	1.19	CD4020	CD4562	1.59
CD4021	1.39	CD4021	CD4566	2.79
CD4022	1.19	CD4022	CD4583	2.49
CD4023	.25	CD4023	CD4584	.75
CD4024	.25	CD4024	CD4721	.99
CD4025	.23	CD4025	CD4724	.95
CD4026	2.95	CD4026	MC14409	17.95
CD4027	.69	CD4027	MC14410	15.95
CD4028	.39	CD4028	MC14411	15.95
CD4029	.49	CD4029	MC14412	15.95
CD4030	.49	CD4030	MC14419	7.95
CD4034	3.49	CD4034	MC14433	15.95
CD4038	.39	CD4038	MC14531	2.49
CD4040	.49	CD4040	MC14541	2.49
		CD4043		
		CD4093		

[illegible]

M6807	CPU (4 bytes RAM)	24.95
M6807MN	Micro Micro Interceptor	2.95
PB085	CPU	9.95
MSY99QJOL	MPU - 16-bit	39.95

MICROPROCESSOR MANUALS

UM-283	User Manual	7.50
MC-DP1802	User Manual	5.00
MM-2550	User Manual	5.00

6800/6800 SUPPORT DEVICES

MC6800	Sample & Hold Amplifier	7.95
MC6802CP	MPU with clock and RAM	14.95
MC6803(API)	12x8 Static RAM	4.95
PR0892	17-Bit Adapt (MC6820)	17.95
MC6826	Priority Interrupt Controller	17.95
MC6803BL	12x8x8-bit ROM (MC68A30) *	6.95
MC6852	On-Chip Serial Data Adapter	6.95
MC6855	On-Chip Parallel MODEM	6.95
MC6862	2400bps Modem	12.95
MC6860A	Quad 3-state bus. trans. (MC6T26)	2.25

8080/8080A SUPPORT DEVICES

MS890A	8-bit Input/Output	4.95
DH212	8-bit Input/Output	3.25
DH214	Priority Interrupter	5.95
DH215	Directional Bus Driver	5.95
DH216	Clock Generator/Driver	3.95
DH226	Bus Driver	3.49
DH228	Synchronizer/Bus Driver	3.95
MSN843	I/O Expander for 48 Series	5.95
MSN843	Synchronous Comm. Element	16.95
DH251	Program. Ctrl. I/O (USART)	6.95
DH252	Prog. Interval Timer	8.95
DH253	Interval Timing (I/O PPI)	8.95
DH257	DMA Control	9.95
DH258	Interrupt Control	9.95
DH275	Ctrl. Controller	9.95
DH277	Prog. Keyboard/Display Interface	9.95
AYD933	Timing Element	4.95
DH304	8-Bit Bi-Directional Receiver	3.95
DH307	8-Bit Bi-Directional Receiver	3.95
DH308	8-Bit Bi-Directional Receiver	3.95
DH310	Octal Latched Peripheral Driver	5.25
DH311	Octal Latched Peripheral Driver	5.25

MC3470	Floppy Disk Read AMP System	7.95
MC408L7	7-bit D/A Converter (ADC08B7CL)	4.95
MC4140BL	MC4140BL 8-Bit A/D Converter	14.95
AF100-1C	Universal Active Filter 2.5%	5.95
TCF001	Tone Low Band Filter	1.95
AF102-1C1	MC4140BL 8-Bit A/D Converter	14.95
LM308CH	Super Gain Op Amp	1.95
LM334Z	Constant Current Source	1.95
LM335Z	Temperature Transducer	1.95
LF358N	JFET Input Op Amp	1.95
CA3080	Sample & Hold Amplifier	7.95
LM399H	Temp. Comp. Pres. Ref. (5ppm/C°)	1.95
ADC0804CL	8-bit A/D Converter (1.5SS)	4.95
ADC0809CL	8-bit A/D Converter (8 Channels)	4.95
ADC0809CCN	8-bit A/D Converter (8 Ch., Multi.)	4.95
ADC0817CCN	8-bit A/D Converter (16-ch. Multi.)	4.95
DC1000L	10-Bit D/A Converter (0.05% Lin.)	14.95
DC1007L	10-Bit D/A Conv. Micro. Comp.	10.20%
DC1008L	10-Bit D/A Converter (0.05% Lin.)	14.95
DC1009L	10-Bit D/A Converter (0.05% Lin.)	14.95
DC1222CL	12-Bit D/A Converter (0.25% Lin.)	8.95
DC1222LL	12-Bit D/A Converter (0.25% Lin.)	8.95
AY-5-1013	3K BAUD UART	1.95

SPECIAL FUNCTION


DS0025CN	Dual MOS Clock Driver (5M ²)	3.95
DS0026CN	Dual MOS Clock Driver (5M ²)	3.95
IN1771N-1	Floppy Disk Controller	1.95
INS265N1	Communication Chip	1.95
MC68518	Microprocessor Real Time Clock	1.95
MS8174N	Micro. Compatible Time Clock	1.11
CDP402N	Microprocessor w/64-digit RAM	7.95
CDP402N	& Direct LED w/N Buss Int.	7.95
CDP407N	12-seg. Fluor. Display (cmgmpy)	7.95

TELEPHONE/KEYBOARD CHIPS

AY-9-1010	Push Button Telephone Dialer	14.95
AY-9-1020	Reply Button Telephone Dialer	14.95
AY-9-1030	AMPS Call Transfer (cmgmpy)	14.95
AY-9-2376	Keyboard Encoder (88 keys)	7.95
AY-9-16-5	Keyboard Encoder (18 keys)	7.95
74C922	Keyboard Decoder (88 keys)	7.95
74C923	Keyboard Decoder (20 keys)	5.95
MS5499N	Push Button Telephone Dialer	14.95
MS5499N	96/144-key Serial Keybrd. Encodr	14.95

★ **SHIPMENT IN 24 HOURS** ★
6:00 AM to 6:00 PM (PST)
Call: (415) 592-8097


8 pin LP	.17	.16	.15	14 pin ST	.27	.25	.24
14 pin LP	.20	.19	.18	16 pin ST	.30	.28	.27
16 pin LP	.22	.21	.20	18 pin ST	.35	.32	.31
18 pin LP	.29	.28	.27	24 pin ST	.49	.45	.44
20 pin LP	.34	.32	.30	28 pin ST	.59	.55	.54
22 pin LP	.37	.36	.35	36 pin ST	.99	.90	.88
24 pin LP	.38	.37	.36	40 pin ST	1.39	1.26	1.24
28 pin LP	.46	.44	.43				
36 pin LP	.60	.59	.58				
40 pin LP	.63	.62	.61				



SOLDERTAIL (GOLD) STANDARD

	1-24	25-49	50-100
8 pin SG	.39	.35	.31
14 pin SG	.49	.45	.41
16 pin SG	.54	.49	.44
18 pin SG	.59	.53	.48
24 pin SG	.79	.75	.69
28 pin SG	1.10	1.00	.90
36 pin SG	1.65	1.40	1.25
40 pin SG	1.75	1.59	1.45

\$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6% Sales Tax
Postage — Add 5% plus \$1.50 Insurance
Send S.A.S.E. for Monthly Sale Flyer!



WIRE WRAP SOCKET (GOLD) LEVEL #3

	1-24	25-49	50-100
8 pin WW	.59	.54	.50
10 pin WW	.69	.63	.60
14 pin WW	.73	.67	.64
16 pin WW	.85	.77	.74
18 pin WW	.95	.90	.87
20 pin WW	1.19	1.08	.95
22 pin WW	1.40	1.25	1.05
24 pin WW	1.39	1.26	1.10
28 pin WW	2.69	1.53	1.30
36 pin WW	2.19	1.99	1.70
40 pin WW	2.29	2.09	1.80

Spec Sheets — 25¢ each
Send 8¢ Postage for your
FREE 1982 JAMECO CATALOG
Prices Subject to Change

Mail Order Electronics Worldwide®

Jameco

ELECTRONICS

NEW!
Telex Number
Telex 176043

1355 SHOREWAY ROAD, BELMONT, CA 94002
PHONE OR FAX

★ **Evening Kits**

Part No.	Function	Price
70851P	CMOS Precision Timer	14.95
70851P/Kit*	Stopwatch Chip, XTL	24.95
7105CPL	3-Digit A/D (LED Drive)	24.95
7106VE/Kit*	IC, Circuit Board, Display	16.95
7107CPL	3½ Digit A/D (LED Drive)	15.95
7107VE/Kit*	IC, Circuit Board, Display	29.95
7110CPL	3½ Digit A/D LCD Dis. H.L.D.	18.95
7117CPL	3½ Digit A/D LED Dis. H.L.D.	17.95
7201DR	Low Battery Volt Indicator	2.25
7205IGP	CMOS LED Stopwatch/Timer	12.95
7206VE/Kit*	Stopwatch Chip, XTL	19.95
7209CPE	One Generator	5.15
7209CEV/Kit*	Timer Generator Chip, XTL	12.95
7207ADP	Oscillator Controller	6.50
7207AEV/Kit*	Freq. Counter Chip, XTL	13.95
72081P	Seven Decade Counter	17.95
72091PA	Clock Generator	3.95
72101PG	CMOS Stopwatch XCT	13.95
7215VE/Kit*	4 Func. Stopwatch Chip, XTL	19.95
7216A1P	8-Digit Univ. Counter C.A.	32.00
7216B1P	8-Digit Freq. Counter C.A.	26.95
7218D1P	8-Digit Freq. Counter C.C.	21.95
7217J1P	4-Digit LED Up/Down Counter C.A.	12.95
7217A1P	4-Digit LED Up/Down Counter C.C.	14.95
7224A1P	LCD 4½ Digit Up Counter DRI	11.95
7226A1P	8-Digit Univ. Counter	31.95
7226VEV/Kit*	Function Counter Chip, XTL	74.95
7240J1P	CMOS 555 Timer/Counter	4.95
7242A1P	CMOS Divide-by-256 RC Timer	2.00
7250J1P	CMOS BCD Prog. Timer/Counter	6.00
7260J1P	CMOS BCD Prog. Timer/Counter	5.55
7265J1P	CMOS 555 Timer (8 pin)	1.45
7266J1P	CMOS 555 Timer (14 pin)	2.20
7618BCPA	CMOS Op Amp Comparator	5M¥ 2.25
7618BCPB	CMOS Op Amp Ext. Cmr.	5M¥ 2.95
7618BCPB	CMOS Dual Op Amp Comp.	5M¥ 3.95
7618BCPB	CMOS Tri Op Amp Comp.	10M¥ 5.35
7619CCPD	CMOS Op Amp Comp.	10M¥ 5.35
7619CCPD	CMOS Quad Op Amp Comp.	10M¥ 7.50
7620CCPD	Voltage Converter	2.95
8408CPE	Waveform Generator	4.95
8408CPE	Monolithic Logarithmic Amp	21.60
8699CQC	50ppm Band—GAP Volt Ref. Diode	2.50
9011CQC	Volt Ref/Indicator	2.95

74C00		74C		74C210	
74C00	.39			74C210	1.95
74C02	.39			74C240	2.25
74C04	.39	74C95	1.59	74C244	2.25
74C08	.39	74C107	1.89	74C272	2.49
74C10	.39	74C151	2.95	74C373	2.49
74C14	.39	74C154	1.95	74C374	2.57
74C18	.39	74C155	1.95	74C390	.69
74C20	.39	74C156	2.25	74C393	.69
74C22	.39	74C161	1.60	74C397	11.95
74C24	1.39	74C162	1.19	74C312	10.95
74C28	1.95	74C163	1.69	74C317	1.69
74C30	.39	74C164	1.69	74C318	10.95
74C32	.39	74C173	1.39	74C322	5.49
74C34	1.79	74C174	1.39	74C323	5.49
74C36	.39	74C175	1.19	74C325	7.50
74C38	.39	74C192	1.69	74C326	7.50
74C39	.39	74C193	1.69	80C35	.79
74C83	1.29	74C195	1.59	80C37	.79

[illegible]

LM317J	3.95	LM384N	1.95	LM1366N	1.75
LM318CN	3.95	LM386N-3	1.29	LM4002	1.49
LM319N	1.95	LM387N	1.45	LM4287P	2.25
LM320N	1.35	LM389N	1.35	LM396P-2	2.25
LM320K-12	6.95	LM392N	2.99	LM398N	2.99
LM320K-15	1.35	LF398	4.00	LM3900N	6.95
LM320T-5	1.29	TL494N	5.00	LM3905CN	1.25
LM320T-12	1.25	TL494N	4.49	LM3914N	1.15
LM320T-15	1.25	TL494P	4.49	LM3914N	1.35
LM323K	5.95	NE510A	3.95	LM3915N	1.95
LM324N	6.95	NE529A	4.95	LM3916N	1.95
LM329DZ	.65	NE531H	3.95	RC4136N	3.25
LM330H	1.95	NE531H	3.95	RC4151N	3.95
LM334-2	1.30	NE540A	6.95	RC4194T	6.95
LM335Z	1.40	NE544N	4.95	RC4195TK	5.49
LM336-2	1.75	NE550A	1.30	LM4005A	3.25
LM337	1.95	NE550N	.29	ICL 8039E	1.95
LM337MP	1.15	LM358N	1.29	LM4006N	1.95
LM338K	6.95	NE564N	3.95	LM13600N	1.49
LM339N	.99	LM565N	1.25	75138N	1.95
LM339N-1	1.35	LM565CN	1.95	74540N	.89
LM340K-12	1.95	NE570N	1.95	74540CN	1.95
LM340K-15	1.35	NE570N	4.95	74549	.89

CAPACITOR CORNER

50 VOLT TANTALUM DISC CAPACITORS							
Value	1-9	10-99	100+	Value	1-9	10-99	100+
10 pf	.08	.06	.05	.047M	.08	.06	.05
22 pf	.08	.06	.05	.047M	.08	.06	.05
47 pf	.08	.06	.05	.047M	.08	.06	.05
100 pf	.08	.06	.05	.047M	.08	.06	.05
220 pf	.08	.06	.05	.047M	.08	.06	.05
470 pf	.08	.06	.05	.047M	.09	.12	.10
100 VOLT MYLAR FILM CAPACITORS							
Value	1-9	10-99	100+	Value	1-9	10-99	100+
.001mf	.12	.10	.07	.047M	.21	.17	.13
.002mf	.12	.10	.07	.047M	.21	.17	.13
.004mf	.12	.10	.07	.10M	.27	.23	.17
.01mf	.12	.10	.07	.20M	.31	.27	.22
+20% DIPPED TANTALUM (Solid) CAPACITORS							
Value	1-9	10-99	500+	Value	1-9	10-99	500+
1.5V/5	.39	.34	.29	1.5V/35	.41	.37	.29
2.2V/5	.39	.34	.29	2.2V/35	.51	.45	.34
22V/5	.39	.34	.29	22V/35	.63	.55	.37
33V/5	.39	.34	.29	4.7V/25	.63	.56	.45
47V/5	.39	.34	.29	6.8V/25	.79	.65	.55
68V/5	.39	.34	.29	10V/35	1.39	.89	.65
10V/35	.39	.34	.29	22V/6	.79	.69	.55
MINI. ALUMINUM ELECTROLYTIC CAPACITORS							
Axial	1-99	100-499	500+	Radial	1-99	100-499	500+
47V/50	.16	.14	.10	47V/25	.15	.13	.12
100V/50	.17	.15	.12	4.7V/16	.16	.14	.13
3.3V/50	.17	.15	.11	10V/16	.15	.13	.12
47V/50	.18	.15	.11	10V/16	.16	.14	.13
100V/50	.19	.16	.12	10V/16	.16	.14	.13
10V/50	.19	.16	.12	4.7V/16	.15	.13	.12
47V/50	.19	.16	.12	4.7V/25	.16	.14	.13
22V/50	.20	.18	.14	10V/25	.16	.14	.13
47V/25	.25	.21	.19	10V/16	.15	.13	.12
47V/50	.25	.25	.23	10V/25	.16	.14	.13
100V/50	.25	.25	.22	10V/16	.16	.14	.13
100V/50	.41	.37	.34	47V/50	.25	.21	.19
100V/50	.39	.34	.33	100V/25	.21	.17	.14
220V/50	.45	.41	.37	100V/50	.25	.22	.21
220V/50	.54	.49	.45	100V/50	.37	.34	.31
470V/16V	.79	.69	.61	220V/50	.25	.21	.19
220V/50	.79	.69	.61	470V/16	.79	.69	.61

UTIC Mini Stereo AM/FM Receiver


WITH HEADPHONES — For Joggers, Cyclists, Skaters & Sports Events



FEATURES: Lightweight headphones. Left/right balance control. Full fidelity stereo sound. Additional black soft carrying case & shoulder strap. Belt clip (hands free). Operates on 3 AA cell batteries (not incl.). Compact size: 3 1/4" x 4 1/4" x 1 1/4". Wt. 6 oz.

Model 2830 List Price \$89.95 **\$34.95**

SPEAKERS



2 1/2" Round — 8 Ohm
25 Watt (4" Leads)
Size: 2 1/4" x 3/4"

2 1/2" Square — 16 Ohm
25 Watt (4 mount. holes)
Large Ceramic Magnet
Size: 2 1/4" x 2 1/4" x 1/4"

Part No. Price
A0201 \$1.25 or 2/1.98

MOTOROLA

AM/FM Stereo Push Button CAR RADIO

FOR VOLKSWAGEN SCIROCCO, RABBIT, AUDI 5000 AND FOX
(with minor adjustments, can be used in any automobile)



Includes bezel trim and everything pictured. Two each 4x6 speakers and grille (1 1/2" deep). All cables and leads for hook-up. Includes all Instruction Manuals for easy installation. Cut-out dimensions: 7" W x 1 1/4" H x 6 1/4" L.

Model 5VW3901 **\$49.95**

UV-EPROM Eraser



Erases 2708, 2716, 2732, 2764, 2516, 2532, 2564. Erases up to 8 chips within 5 minutes (1 chip in 37 minutes). Maintains constant exposure distance of one inch. Special conductive foam liner eliminates static build-up. Built-in safety lock to prevent UV exposure. Compact — only 9.00" x 3.70" x 2.60". Complete with holding tray for 8 chips.

UVS-11EL Replacement Bulb **\$16.95**

DE-4 UV-EPROM Eraser **\$79.95**

JOYSTICKS



JS-5K 5K Linear Taper Pots **\$5.25**
JS-100K 100K Linear Taper Pots **\$4.95**
JS-150K 150K Linear Taper Pots **\$4.95**
JVC-40 40K (2) Video Controller in case **\$4.75**

5 1/4" Mini-Floppy Disc Drive

FOR TRS-80 MODEL I, II (Industry Standard)
Features single or double density. Recording mode: FM single, MFM double density. Power: +12VDC (±0.6V) 1.6 amps max., 5VDC (±0.25V) 0.8 amps max. Unit as pictured at left (does not incl. case, power supply or cables). 30-page data book included. Weighs 3 1/2 pounds. Size: 5 1/4" W x 8" D x 3 1/4" H

Part No. Limited Quantity! Price
FD200 Single-sided, 40 tracks, 250K bytes capacity **\$179.95**
FD250 Double-sided, 35 tracks, 438K bytes capacity **\$199.95**

JE215 Adjustable Dual Power Supply

General Description: The JE215 is a Dual Power Supply with independent adjustable positive and negative output voltages. A separate adjustment for each of the supplies provides the user unlimited applications for IC current voltage requirements. The supply can also be used as a general all-purpose variable power supply.

FEATURES:

- Adjustable regulated power supplies, pos. and neg. 1.2VDC to 15VDC.
- Power Output (each supply): 5VDC @ 500mA, 10VDC @ 750mA, 12VDC @ 500mA, and 15VDC @ 750mA.
- Two, 3-terminal adj. IC regulators with thermal overload protection.
- Heat sink regulator cooling
- LED "on" indicator
- Printed Board Construction
- 120VAC input
- Size: 3 1/2" W x 5 1/16" L x 2 1/8" H

JE215 Adj. Dual Power Supply Kit (as shown) **\$24.95**

(Picture not shown but similar in construction to above)
JE200 Reg. Power Supply Kit (5VDC, 1 amp) **\$14.95**
JE205 Adapter Bld. (to JE200) ±5.9 & ±12V. **\$12.95**
JE210 Var. Pwr. Sply. Kit, 5-15VDC, to 1.5amp. **\$19.95**

KEYBOARDS — POWER SUPPLIES

JE610 ASCII Encoded Keyboard Kit

The JE610 ASCII Keyboard Kit can be interfaced into most any computer system. The kit comes complete with industrial grade keyboard switch assembly (82-keys), IC's, sockets, connector, electronic components and a double-sided printed wiring board. The keyboard assembly requires +5V @ 150mA and -12V @ 10mA for operation. Features: 60 keys generate the 126 characters, upper and lower case ASCII set. Fully buffered. Two user-definable keys provided for custom applications. Cops lock for upper-case only memory chip. Outputs directly compatible with TTL/DTL or MOS logic arrays. Easy interfacing with a 16-pin dip or 18-pin edge connector. Size: 3 1/4" H x 14 1/4" W x 8 3/4" D.

JE610/DTE-AK (After assembly as pictured above) **\$124.95**

JE610 Kit 62-Key Keyboard, PC Board & Components (no case) **\$ 79.95**

K62 62-Key Keyboard (Keyboard only) **\$ 34.95**

DTE-AK (case only — 3 1/4" H x 14 1/4" W x 8 3/4" D) **\$ 49.95**

JE212 — Negative 12VDC Adapter Board Kit for JE610 ASCII KEYBOARD KIT Provides -12VDC from incoming 5VDC **\$9.95**

JE600 Hexadecimal Encoder Kit

FULL 8-BIT LATCHED OUTPUT 19-KEY KEYBOARD

The JE600 Encoder Keyboard Kit provides two separate hexadecimal digits produced from sequential key entries to allow direct programming for 8-bit microprocessor or 8-bit memory circuits. Three additional keys are provided for user operations with one having a bistable output available. The outputs are latched and monitored with 9 LED readouts. Also included is a key entry strobe. Features: Full 8-bit latched output for microprocessor use. Debounce circuit provided for all 19 keys. Nine LED readouts to verify entries. Easy interfacing with standard 16-pin IC connector. Only +5VDC required for operation. Size: 3 1/4" H x 8 3/4" W x 8 3/4" D.

JE600/DTE-HK (After assembly as pictured above) **\$99.95**

JE600 Kit 19-Key Hexadecimal Keyboard, PC Board & Components (no case) **\$59.95**

K19 19-Key Keyboard (Keyboard only) **\$14.95**

DTE-HK (case only — 3 1/4" H x 8 3/4" W x 8 3/4" D) **\$44.95**

ALPS 26-KEY CALCULATOR KEYBOARD

Gray Key Caps with black, green and white back drop. Mechanical SPST Switching: 22-pin Edge Card Connection.

Part No. **K826** **\$2.95 each or 2/\$4.95**

MICRO SWITCH 69-KEY KEYBOARD

Data Entry Keyboard, Encoded Output: 8-bit Parallel EBC DIC. Switching: Hall Effect, 24-pin Edge Card Connection. Complete with Pin Connector.

Part No. **K869SD12-2** **\$19.95 each**

DATANETICS 74-KEY KEYBOARD

ASCII Encoded Keyboard, Output: Even Parity ASCII, Supply voltage +5, -12 volt. Switching: Mechanical SPST — 50-pin Connection. Complete with Pin Connector.

Part No. **K8354** **\$29.95 each**

MICRO SWITCH 85-KEY KEYBOARD

Data Entry Keyboard, Switching: Hall Effect, 13-pin Edge Card Connection. Metal frame, dark brown key caps.

Part No. **85SD18-1** **\$29.95 each**

MICRO SWITCH 88-KEY KEYBOARD

Data Entry Keyboard used in a Double 1640 Terminal. Supply Voltage: +5V, -12V. Switching: Hall Effect, 18-pin Edge Card Connection. Schematic included.

Part No. **88SD22** **\$69.95 each**

POWER SUPPLIES

POWER SUPPLY — 5VDC @ 1 AMP REGULATED

Transaction Tech
Output: +5VDC @ 1 amp (also +30VDC reg. Input 115VAC 60Hz. Two-tone (black/beige) self-enclosed case. 6 ft. 3 cond. black power cord. Size: 6 1/2" W x 7" D x 2 1/4" H. Wt. 3 lbs.

Part No. **PS51194** **\$19.95 each**

POWER SUPPLY — 5VDC @ 1 AMP REGULATED

B Industries
Output: +5VDC @ 1 amp, +36-42VDC adj. 400mA or less, 30VAC (isol.) @ 1.5 amp. Input 115VAC 60Hz. On/off switch, 6 1/4" W x 7 1/4" D x 3 7/8" H. Wt. 7 lbs.

Part No. **PS407D** **\$24.95 each**

POWER SUPPLY — 5VDC @ 7.5 AMP, 12VDC @ 1.5 AMP SWITCHING

Output: 115VAC, 50-60Hz @ 3 amp/230VAC, 50Hz @ 1.5 amp. Fan vol./power supply select switches (115/230VAC). Output: 5VDC @ 7.5 amp, 12VDC @ 1.5 amp. 8 ft. blk. pow. cord. 11 1/2" W x 13 1/4" D x 3 1/4" H. Wt. 6 lbs.

Part No. **PS94V0** **\$49.95 each**

POWER PAC — Heavy Duty Multi-Voltage Power Supply — 5VDC, 12VDC, 24VDC

Output: +5VDC @ 30A, +12VDC @ 2A, +12VDC @ 4A & +24VDC @ 3A. Input: 115VAC, 7A, 220VAC, 3.5A. Reg. ±15% line & load comb. Ripple: 10mV peak to peak (100V RMS). Overvolt. protect.: +5V, +12V, Overcurr. protect. incl. 15% L x 6 1/2" H x 11 7/8" D. Wt. 40 lbs.

Part No. **285-016** **\$89.95 each**

★ SHIPMENT IN 24 HOURS ★

6:00 AM to 6:00 PM (PST)

Call: (415) 592-8097

JUMPER AND CABLE ASSEMBLIES

STANDARD DIP JUMPERS

All jumpers use low profile dip plugs with heavy duty pins for repeated disconnect applications.

JAMCO Part No.	AP Cross Reference	No. Pins	Description	Wire Length	Price
DJ4-1	924102-12	14	single end 12"	12"	\$1.79
DJ4-2	924102-24	14	single end 24"	24"	2.05
DJ4-3	924102-36	14	single end 36"	36"	2.35
DJ4-14	924106-12	14	double end 12"	12"	3.20
DJ4-14	924106-24	14	double end 24"	24"	3.49
DJ4-14	924106-36	14	double end 36"	36"	3.79
DJ6-1	924112-12	16	single end 12"	12"	1.85
DJ6-2	924112-24	16	single end 24"	24"	2.19
DJ6-3	924112-36	16	single end 36"	36"	2.59
DJ6-16	924116-12	16	double end 12"	12"	3.35
DJ6-16	924116-24	16	double end 24"	24"	3.69
DJ6-16	924116-36	16	double end 36"	36"	3.99
DJ24-1	924122-12	24	single end 12"	12"	2.69
DJ24-2	924122-24	24	single end 24"	24"	3.39
DJ24-3	924122-36	24	single end 36"	36"	3.99
DJ24-124	924126-12	24	double end 12"	12"	4.79
DJ24-24	924126-24	24	double end 24"	24"	5.29
DJ24-324	924126-36	24	double end 36"	36"	5.89

STANDARD DB25 SERIES CABLES

Now you can order DB25 P or S connectors with the cable necessary to fit your application. Choose from our standard flat cable in 4-foot lengths. Call today.

Part No.	Cable Length	Connectors	Price
DB25P-4	4 feet	1-DB25P	\$ 9.95 ea.
DB25S-4	4 feet	1-DB25S	10.95 ea.
DB25P-4-P	4 feet	2-DB25P	16.95 ea.
DB25P-4-S	4 feet	1-DB25P/1-DB25S	17.95 ea.
DB25S-4-S	4 feet	2-DB25S	18.95 ea.

\$10.00 Minimum Order — U.S. Funds Only
California Residents Add 6% Sales Tax
Postage — Add \$5 plus \$1.50 Insurance
Send S.A.S.E. for Monthly Sale Flyer!

Jamco ELECTRONICS

1355 SHOREWAY ROAD, BELMONT, CA 94002
PHONE ORDERS WELCOME — (415) 592-8097

BOOKS

30001	National Semiconductor — Interall — Intel	\$6.95
30002	National CMOS Data Book (640 pages) 74C, CD4000, and A/D Converters	\$6.95
30003	National Interface Data Book (204 pages) DP, DS8000, DS9000, DS90C03	\$11.95
30004	National Linear Data Book (1376 pages) LM, LF, ADC, DAC, LH Series	\$4.95
30005	National Series 80 — Board Level Components (224 pages)	\$8.95
30006	National TTL Logic Data Book (624 pages) 7400, LS, L, H, S, and DM8000 Series	\$24.95/lot

010400 Intel Component Data Catalog **\$14.95**

Full data sheets for Intel's products incl. memory devices, microproc., peripherals & indust./mil. products (1328 pages)
205610 Intel Peripheral Design Handbook **\$9.95**

Full data sheets, appl. notes for Intel peripheral device components (644 pages)

AC and DC Wall Transformers



Part No.	Input	Output	Price
AC 250	117V/60Hz	12VAC 250mA	\$3.95
AC 500	117V/60Hz	12VAC 500mA	\$4.95
AC 1000	117V/60Hz	12VAC 1 amp	\$5.95
AC9004	117V/60Hz	9.2VAC 2.5 amp	\$2.95 or 2/\$4.95
DC 600	120V/60Hz	8VDC 400mA	\$1.95 or 2/\$2.95
DC612 (above)	120V/60Hz	6.3-12VDC 300mA	\$6.95
DV5490	117V/60Hz	9VDC 275mA	\$2.49 or 2/\$3.95
DC900	120V/60Hz	5VDC 500mA	\$2.95 or 2/\$4.95
DC1200	120V/60Hz	12VDC 300mA	\$2.95 or 2/\$4.95

CONNECTORS

Part No.	Description	Price
DB25P	D-Subminiature Plug	\$2.95
DB25S	D-Subminiature Socket	\$3.50
D20418-2	Screw Lock Hdwr. (2) DB25S/P	\$2.99
DB51226	Cover for DB25P/S	\$1.75
22/44SE	P.C. Edge (22/44 Pin)	\$2.95
UG8/U	BNC Plug	\$1.79
UG8/U	BNC Jack	\$3.79
UG175/U	UHF Adapter	\$.49
SO239	UHF Panel Recp.	\$1.29
PL258	UHF Adapter	\$1.60
PL259	UHF Plug	\$1.60
UG260/U	BNC Plug	\$1.79
UG1094/U	BNC Bulkhead Recp.	\$1.29

TRS-80 16K Conversion Kit

Expand your 4K TRS-80 System to 16K or 32K

Kit comes complete with:

- 8 ea. MM5290 (UPD48416) 16K Dyn. Ram (*ns)
- Documentation for conversion

TRS-16K2 *150ns **\$19.95**

TRS-16K3 *200ns **\$16.95**

TRS-16K4 *250ns **\$14.95**

Mostek DC/DC Converter

+5 VOLTS TO -9 VOLTS

Input: +5V. Output: -9V (regulated) @ 30mA. Printed circuit mounting.

DC10 **\$2.95 ea. or 2/\$4.95**

Sorensen Regulated Power Supplies

Sorensen's open construction (SOO) power supplies are series regulated, solid-state systems, designed to provide DC voltages at six levels (2.28 volt range). Units are open-framed on sturdy black anodized aluminum for excellent ventilation. Features: 115/208/230VAC Input @ 50-63Hz. Low ripple: 1.5mVrms, 5mV P-P max. Adjustable current limit. Voltage adjustment control. Temperature-compensated circuitry. Optional over-voltage protection. All schematics and specifications supplied with unit. Series A, B, C, E have 3 mounting surfaces (Series F, bottom mounting only).

Part No.	Series	Output Volt. Adjust. min. max.	Output Current (Amps) 40°C 50°C 60°C	Size (inches)	Wt. lbs.	Price
SDC-2-6	A	1.9 2.1	6.0 4.9 3.8	5.62x4.88x2.50	4.3	19.95
SDC2-5	F	1.9 2.1	5.0 2.0 1.5	5.62x4.88x4.88	10.9	29.95
SDC2-3	B	4.75 5.25	3.0 2.4 1.8	4.00x4.88x1.62	2.0	24.95
SDC2-15	E	4.25 5.25	18.0 15.0 12.0	14.00x4.88x2.75	12.0	39.95
SDC2-16	F	4.25 5.25	25.0 21.5 17.5	16.00x4.88x4.88	16.0	49.95
SDC12-15	F	11.4 12.6	11.0 9.2 6.8	14.00x4.88x1.62	12.0	44.95
SDC12-15	F	11.4 12.6	15.0 12.75 9.5	16.00x4.88x4.88	16.0	49.95
SDC15-5	C	14.25 15.75	5.0 4.2 3.5	7.00x4.88x3.37	6.5	39.95
SDC15-5	E	14.25 15.75	9.5 7.6 5.8	14.00x4.88x1.62	12.0	44.95
SDC15-15	F	14.25 15.75	13.0 10.5 8.0	16.00x4.88x4.88	16.0	49.95
SDC20-6	A	26.5 29.4	0.8 0.64 0.45	4.00x4.88x1.62	2.0	24.95

Pee Wee Boxer Fan

- 36cm free air delivery
- 3 1/2" sq. x 1.665" depth
- 10 yrs. cont. duty at 20°C
- 115V 50/60Hz
- For Apple users

PWS2107 U Cleaned & tested (used) **\$ 9.95 ea.**

PWS2107F New **\$14.95 ea.**

Muffin® Fan

- 105cfm free air delivery
- 4.68" sq. x 1.50" depth
- 10 yrs. cont. duty at 20°C
- Impedance protected, ambient to 70°C
- 115V 50/60Hz 14W Wt. 17 oz.

MUZA1-U Cleaned & tested (used) **\$9.95 ea.**

MUZA1-N New **\$14.95 ea.**

KITS KITS KITS KITS KITS KITS

ELECTRONIC KITS

We have one of the largest selections of inexpensive electronic kits (over 60 available!) and we have been providing quality kits for over 10 years to thousands of schools, hobbyists and engineers worldwide. Remember, all of our kits contain all parts and quality PC board (no need to buy the PC board extra). Compare our prices, extra features and completeness—you just won't find any other kits that compare!

ATTENTION DEALERS

We are looking for dealers to sell our line of kits. We provide liberal discounts and prices that beat any competition. Less than \$100 gets you started! Write or call for more information.

NEW 120VAC LIGHT SEQUENCER KIT
Great for discos, billboards, special effects, roof top Christmas displays, etc. This reliable IC and SCR kit sequences 10 outputs. The board has 10 output pads and each output pad can light up to 150 watts of 120VAC lamps (your choice) connected to it. Features variable speed and fused input. Kit comes with all parts, PC board and instructions. Size of board: 4" x 8". Operates from 120 VAC. C4725 \$19.95

NEW 10 NOTE SOUND SYNTHESIZER KIT
Very unique simple music synthesizer features 10 adjustable notes, variable pitch, variable speed, flashing LED and individual or flowing notes. Make "robot" sounds, space war computer effects, etc. One of the most unusual kits. Circuit features 3 IC's and 12 trimmer resistors. Complete with all parts, PC board and instructions. Size of board: 2.8" x 4". Operates from 9V battery (not included). C4722 \$11.95

NEW ELECTRONIC SLOT MACHINE KIT
Realistic action slot machine features sound effects, digital readouts and flashing LED. Has 3 different symbols that "roll" and "come up" one at a time. When all symbols are the same a special winner note sounds. Circuit uses 7 IC's and 12 transistors. Kit comes complete with all parts, PC board and instructions. Size of board: 5.5" x 7". Operates from 9V battery (not included). C4723 \$29.95

NEW ELECTRONIC DIGITAL DICE KIT
Fun and exciting—this kit replaces conventional dice. Features bright jumbo LEDs and "roll" sound. Speed of roll is fully adjustable and dice stop individually! Circuit uses 4 IC's and 10 transistors. Kit comes complete with all parts, PC board and instructions. Size of board: 4" x 4.8". Operates from 9V battery (not included). C4724 \$15.95

CHANEY electronics inc.
P.O. BOX 27038
DENVER, COLORADO 80227
303-781-5750

Phone Orders • Minimum AD Order \$9.00
• Please include \$1.50 for postage (UPS)
• VISA, MC accepted
• Phone orders are welcome

Send for our free catalog of unique items

CIRCLE NO. 8 ON FREE INFORMATION CARD

Class Adv Contd from Page 105

NATIONWIDE listings of major companies employing Engineers and Technicians. Free Details! AVI, Box 264-PE8, Buffalo, NY 14215.

JOBS OVERSEAS - Big money fast. \$20,000 to \$50,000 plus per year. Call 716-842-6000, ext. 324.

"CAREERS" - Opportunities in electronics, list of 500 top firms, addresses, \$8.95. Morris Electronics, Box 95, Pequannock, NJ 07444.

DO-IT-YOURSELF

FREE YOUR DAMAGED TAPES? Cassette, 8 Track Tape Repair Kits. \$4.95 each. Guaranteed. Visa, Mastercard. KITS, Box 127, Sumner, WA 98390.

TRACK THE SUN—Newly designed solar tracking control for parabolic collectors, photovoltaics. Detailed plans, \$4.95. Lane Solar, SC7, Box 303, Nipomo, CA 93444.

REAL ESTATE

FREE CATALOG! Top real estate values coast to coast! Please specify types, property and location desired. UNITED FARM AGENCY, 612-EP West 47th, Kansas City, MO 64112.

BOOKS & MAGS

DO YOU WANT TO WRITE YOUR OWN BOOK? We're looking for electronics writers to do just that. Obtain our electronics needs list, or send your own ideas, by writing Liz Akers, Acquisitions Editor, TAB BOOKS Inc., Blue Ridge Summit, PA 17214, (717) 794-2191.

RUBBER STAMPS

RUBBER STAMPS, BUSINESS CARDS. Free catalog 1-800-851-4945, Jackson's, E-100, Brownsville Rd., Mt. Vernon, Ill. 62864.

REPAIRS & SERVICES

D&A EQUIPMENT REPAIRED: Virginia Sabala, D&A's head technician 15 years, is now operating a parts and repair service. Communications Unlimited, 1217 Ave C, Scottsbluff, NE 68961. Phone: (308) 635-7365.

RECORDS & TAPES

RECORDS — TAPES! Discounts to 73% All labels; no purchase obligations; newsletter; discount dividend certificates. 100% guarantees. Free details. Discount Music Club, 650 Main St., PO Box 2000, Dept. 5-0882, New Rochelle, NY 10801.

HOBBIES

1983 CATALOG, 200 PAGES. Thousands of chemicals, glassware, science/hobby equipment. Send \$2.00. Merrell Scientific, 1665 Buffalo Road, Rochester, New York 14624.

MISCELLANEOUS

MPG INCREASED! Bypass Pollution Devices easily. RE-VERSIBLY!! Free details—Posco GEEB, LaGrangeville, NY 12540.

CORVAIR PARTS - All new 1982 giant discount catalog: \$4.00: Clark's Corvair Parts, Inc., Shelburne, MA 01370.

FREE PROMOTIONAL ALBUMS, concert tickets, stereo, etc. Information: BARRY PUBLICATIONS, 477 82nd Street, Brooklyn, NY 11209.

NEW 1982 EDITION

Stereo Review's TAPE RECORDING & BUYING GUIDE

Handy product listings compare features, specifications, and prices for nearly every new cassette and open reel tape deck...video cassette recorder...car stereo...microphone...headphone...mixer...signal processor...blank tape and accessories, too! Plus articles on buying a cassette deck...how to make better recordings, how noise-reduction systems can help you, and shopping for a video cassette recorder.

*Residents of CA, CO, DC, FL, IL, MA, MI, MO, NJ, NY State, OH, SC, TN and VT add applicable sales tax.

TAPE RECORDING & BUYING GUIDE 1982

Order your copy from
TAPE RECORDING & BUYING GUIDE
P.O. Box 340
Broomall, PA 19008

Enclose \$3.95 (\$2.95* plus \$1.00 postage and handling). Outside U.S.A. \$5.00.

FULL LINE ALL PARTS & COMPUTER PRODUCTS

ELECTRONICS

Same day shipment. First line parts only. Factory tested. Guaranteed money back. Quality IC's and other components at factory prices.

INTEGRATED CIRCUITS

Phone orders only (800) 538-8196

74LS00 TTL	25	MOS-MEMORY	PROM	74100	4.50	MICROPROCESSOR	5502	6.95	IC SOCKETS	DISPLAY LEADS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
------------	----	------------	------	-------	------	----------------	------	------	------------	---------------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

Linear CMOS and 7400 complete lines in stock. Send for catalog.

Modem Kit \$60.00

State of the art, orig., answer. No tuning necessary. 103 compatible 300 baud. Inexpensive acoustic coupler plans included. Bd. Only \$17.00. Article in June Radio Electronics.

Z80 Microcomputer

16 bit I/O, 2 MHz clock, 2K RAM, ROM Breadboard space. Excellent for control. Bare Board \$28.50. Full Kit \$99.00. Monitor \$20.00. Power Supply Kit \$35.00. Tiny Basic \$30.00

TERMS: \$5.00 min. order U.S. Funds. Calif. residents add 6% tax.
\$10.00 min. VISA and MasterCard accepted. \$1.00 insurance optional.
Shipping: Add 5%; orders under \$25.00—10%.

Video Modulator Kit \$9.95

Convert TV set into a high quality monitor w/o affecting usage. Comp. kit w/full instr.

Multi-volt Computer Power Supply

8v 5 amp, ±18v 5 amp, 5v 1.5 amp, -5v 5 amp, 12v 5 amp, -12v option, ±5v, ±12v are regulated. Basic Kit \$35.95. Kit with chassis and all hardware \$51.95. Add \$4.00 shipping.

60 Hz Crystal Time Base Kit \$4.40

INTRODUCING A BRAND NEW MICROCOMPUTER




Start Your Back-to-School Project at The Shack®

No Minimum Order! No Waiting! Low Prices!

Ready-to-Use TV RF Module

NEW!
Only
995



- Works With Any Television Set
- Requires Minimum Support Circuitry

UM1285-8. This completely assembled TV RF modulator is ideal for use with computers, video games, VCRs, projects such as video enhancers, adapters and satellite receivers. Accepts color or b/w video, line-level sound. Selectable output, VHF channels 3 or 4. Unique design reduces line-jitter and on-screen bar patterns. PC board mountable. 3 to 8VDC. With data, pin-out, suggested circuit. Why pay more? 277-221 9.95

Trimmer Capacitors




159 **NEW!**
Pkg. of 2

High "Q"—300 or More!

5-60 pF. PC mountable, with mini screwdriver slot adjustment. For IF and low-level RF peaking. 272-1340 Pkg. of 2/1.59

IF Amp, FM, Video & PLL ICs



Low As
169

Simplify & Improve Your Designs!

Many applications for these versatile ICs! Check out the included specs and data and you'll probably discover some new uses!

MC1330 Video Detector. Used in many solid-state TV circuits. Replaces 3rd IF, detector, video and AFC buffers. High linearity. Outputs: Wideband video (to 8 MHz), AFT, narrow-band reverse video. 10-24VDC. 8-pin DIP. 276-1757 2.49


MC1350 Universal IF Amp With AGC. For radio and TV circuits. Usable from DC to beyond 60 MHz. Typical gain at 45 MHz: 50 dB. AGC range: 60 dB minimum. 12VDC. 8-pin. 276-1758 2.19

MC1358/CA3065 FM Detector. IF amp, limiter, FM detector, electronic volume attenuator and audio driver in a 14-pin DIP. Use as TV replacement or in homebrew receivers (100 kHz to 5.5 MHz IFs). Just the thing for converting CBs and communications receivers to receive NBFM! 10-24VDC. 276-1759 1.79

LM565 PLL. For FM SCA (background music) and RTTY decoders, modems, infrared communications, frequency synthesizers and more. 141-pin. 276-1720 1.69

Computer-Project PC Boards

Radio Shack Exclusive! **NEW!**




Highest Quality Dual-Sided Glass

Great for peripheral and format conversion circuits. Fit card edge connectors, sockets and headers—check Shack's wide selection.

Connectors	Contact Points	Size	Cat. No.	Each
40 position	1520	4 1/4 x 5 1/4	276-163	4.95
50 position	2898	5 1/4 x 8 1/4	276-164	4.95
40 position	1520	4 1/4 x 5 1/4	276-165	9.95
50 position	2898	5 1/4 x 8 1/4	276-166	9.95

D-Submini 25 Connectors



Solder Type



Can be chassis-mounted. Optional hood allows use of non-ribbon type multiconductor cables when less than 25 conductors are required.

A Male. 276-1547 2.99
B Female. 276-1548 3.99
C Hood. 276-1549 2.19

High-Power Noise Filter



Dual "brute-force" L-C sections greatly reduce automobile ignition/alternator noise in CBs, boosters, tape players. 10 amps. 270-051 17.95

SPST DIP Switch

149



Fits 8-Pin DIP Socket

4-Position

Perfect for on-board low-current switching. 275-1304 1.49

120-Volt Neons

79¢ **NEW!**
Pkg. of 2



High brightness NE-2's prewired to dropping resistors for 120-volt AC/DC use. 272-1100 2/79¢


Whip Antenna

299 **NEW!**



Universal replacement with 5 sections, extends from 7 1/4" to 30 1/2". Mounting flange. Red plastic tip for safety. 270-1401 2.99

Autosound Faders And Selector



It's Fix-Up Time!

A Tape/Radio Selector. 270-045 2.99
B Selector With Stereo Fader. 270-046 5.99
C High-Power Fader. Handles 50 watts. 270-048 6.99

Our Best-Ever Analog Multimeter

4995 **NEW!**



- Big 5-Inch Color-Coded Scale
- Built-In "Beep" Continuity Tester
- Fused and Overload Protected

"Pro" features and durability at a rock-bottom price! 21 ranges, 30,000 ohms-per-volt DC sensitivity, easy access to battery and fuse compartment. Timesaving audible continuity test. Measures to 1000 volts AC and DC in 12 ranges. DC current to 10 amps in five ranges. Resistance to 10 megohms in four ranges and dB in five ranges. With manual, probes. Requires 9V and "C" batteries. 22-210 49.95

SPST Toggle Switch With LED Indicator

299




Great for dashboards and projects. LED glows when "on." Rated 5A. 12VDC use only. 1/16" mounting hole. 275-680 2.99

Engineer's Notebook II

By Forrest Mims III

128-Page "Idea Book" Of Practical IC Circuits And Data


249



Revised to include more circuits, tips and data. Easy-to-read "graph paper" format. Useful for beginners and "pros" alike! 276-5002 2.49

Charging System Analyzer

595



LEDs indicate condition of battery, regulator, alternator. Plugs into lighter socket. 22-1635 5.95

Knobs For 1/4" Shafts

Cut 24%

Reg. 1.69 **129**
Pkg. of 2



"Top Hats" with finely tooled, 2-tone styling. Brass set-screw. 274-423 Sale, Pkg. of 2/1.29

RF Chokes

Now Low As **79¢** **NEW LOW PRICE!**

10 μ H. 1.5 amps. (Was 89¢ in 1982 Catalog). 273-101 79¢
100 μ H. 2.0 amps. (Was \$1.09 in 1982 Catalog). 273-102 99¢

Radio Shack®


A DIVISION OF TANDY CORPORATION • OVER 8400 LOCATIONS IN 80 COUNTRIES

Retail prices may vary at individual stores and dealers

Computer Mart

RATE: Ads are 2" by 3". 1 insertion: \$550.00. 6 insertions: \$525.00 ea. 12 insertions, \$500.00 ea. Closing date: 1st of the 2nd mo. preceding cover date. Send order and remittance to Computer Mart, POPULAR ELECTRONICS, 1 Park Ave., N.Y., N.Y. 10016. Direct inquiries to (212) 725-4216.

TRS-80 DISCOUNT COMPUTERS



CALL US
LAST for
the LOWEST
price!

918-825-4844

it will be worth the call!

AMERICAN Small Business
COMPUTERS
118 S. MILL ST. PRYOR, OK. 74361

CIRCLE NO. 118 ON FREE INFORMATION CARD

computer
case company

**comp
case**



• AP103


- AP101 Apple II with Single Disk Drive \$109
- AP102 Apple II with Double Disk Drives 119
- AP103 Apple II, 9 inch Monitor & Double Drives 129
- AP104 Apple III, two additional Drives & Silenttype 139
- AP105 12 inch monitor plus accessories 99
- RS201 TRS-80 Model I, Expansion Unit & Drives 109
- RS202 TRS-80 Monitor or TV set 84
- RS204 TRS-80 Model III 129
- RS205 Radio Shack Color Computer 89
- AT301 Atari Computer & Accessories 109
- P401 Paper Tiger 440 445 460 99
- P402 Centronics 730 737 Line Printer II/IV 89
- P403 Epson MX70 or MX80 89
- P404 Epson MX100 99
- CC90 Matching Attache Case 75

computer case company

5650 INDIAN MOUND, CT COLUMBUS, OHIO 43213 (614) 868-9464

CIRCLE NO. 121 ON FREE INFORMATION CARD


LOWEST POSSIBLE PRICES BEST POSSIBLE WARRANTY



model III 16K

\$839

color
computer 4K
\$310



Call TOLL FREE 1-800-343-8124

computer plus 245A Great Road
Littleton, MA 01460
617 • 486 • 3193

Write for your
free catalog.

TRS-80 is a registered trademark of Tandy Corp.

CIRCLE NO. 123 ON FREE INFORMATION CARD

UNIPROM

THE VERSATILE EPROM HANDLING SYSTEM

• Reads/programs 2704, 2708, 2758, 2508, 2516, 2716 (single supply), 2532, 2732, INTEL'S 2732A and the 8755A (INTEL/NEC) with no personality modules required! All power is derived from the S-100 bus, all signals are S-100 compatible. Port mapping occupies NO memory space.

• An on-board wait-state generator allows use with bus clock rates exceeding 6mhz., with no loss in performance.

• All software is 8080/8085/Z80 compatible and is fully CDOS and CP/M compatible. Software includes "menu" command, "Intelligent" EPROM read/write and disk I/O commands, and functions usually found only in "monitors" and "debuggers".

UNIPROM board (A & T) with extensive documentation, including source listings — \$199.00.

UNIPROM disk-based software with source on disk and listing (specify 5.25" or 8" CDOS or CP/M, or NORTHSTAR 5.25" CP/M) — \$38.00.

UNIPROM EPROM-based software (2532) \$55.00.

CDOS is a registered trademark of CROMECO, INC. CP/M is a registered trademark of DIGITAL RESEARCH, INC. NORTHSTAR is a registered trademark of NORTHSTAR COMPUTER, INC.



CER-TEK, INC.

6020 Doniphan Drive
El Paso, Texas 79932
(915) 581-6697

CIRCLE NO. 119 ON FREE INFORMATION CARD

TRS-80® ATARI Home Computer

Includes a FREE Green
Screen, a \$22.95 Value!



MODEL III 16K **\$825** MODEL 400 16K **\$329**
Model III 48K **\$1,999** Model 800 48K **\$779**

Price — We have the best price. Check the others, but call us.

Selection — ATARI • APPLE • TRS-80 • EPSON • OKIDATA • C.I.TOH, etc.

Service — Most items in stock for immediate shipment. Call or write for Free 40 page catalog of over 600 items.

**Computer
Discount
of America**

15 Marshall Hill Road
West Milford Mall
West Milford, NJ
07480-2198
In New Jersey call
201-728-8080

CALL TOLL FREE: 800-526-5313

CIRCLE NO. 122 ON FREE INFORMATION CARD

SUPER BARGAIN CP/M SINGLE BOARD COMPUTER - \$390.00

The popular VP Series Z80 Industrial Quality Computer is now available unassembled for OEM's, Clubs etc.. Assemble as many as you want for a one time fee. Wirewrap or PC board versions. CP/M 2.2 and 1K EPROM monitor runs all CP/M Software. Specifications: Z80 CPU, 3 RS232 Serial Ports, 4 Counters-Timers, 4 Channel DMA, Soft Sector Disk Controller, Video Controller (80X25), 8K EPROM, 64K-256 RAM, Clock Calendar chip, Printer Port, Keyboard Port, over 64 Parallel I/O lines, or board regulators. Expansion area and Expansion Interface connector. The one board computer that does it all!

DATA WORLD INCORPORATED
8061 Watson Road
St. Louis, MO 63119
(314) 961-2229
Contact: KENNETH TAGGART.

CIRCLE NO. 124 ON FREE INFORMATION CARD

YORK 10 BASF-DPS WORLD STANDARD TAPE



**MONEY BACK
GUARANTEE**

**COMPUTER GRADE
BLANK CASSETTES**

"We monitored the output to the computer with a specially built meter and found absolutely no dropouts throughout the tape..."
Stace Papadopoulos
Beaverton, OR

ITEM	1 DOZ.	2 DOZ.
C-05	7.50	13.50
C-10	8.00	14.40
C-20	10.00	18.00
Hard Box	2.50	4.00
Soft Box	2.00	3.40

Calif. residents add 6% sales tax
Shipping 1 doz. \$2. 2 doz. \$3.50.
3 doz. \$4.50. Each additional doz.
\$3.50.

Write or call for QUANTITY DISCOUNTS

for IMMEDIATE
SHIPMENT on
Credit Card
Orders

Call: 213/710-1430

YORK 10 Computerware
24573 Kilridge St. P-1 Canoga Park, CA 91307

CIRCLE NO. 120 ON FREE INFORMATION CARD

PERSONAL COMPUTERS

HARDWARE	PERIPHERALS
ATARI 400 ... 355	DATA CASSETTES
ATARI 800 ... 675	DISK DRIVES
TI 99 4/A ... 360	MODEMS
VIC 20 ... 255	PRINTERS

SOFTWARE

HUNDREDS OF DIFFERENT KINDS
MANY MAJOR MANUFACTURERS

TERMS

CASH, CHECK, OR MONEY ORDER,
NO C.O.D.'s. TENN. RESIDENTS ADD
6 3/4% TAX. NO CHARGE FOR
SHIPPING IN THE CONTINENTAL U.S.

COMPUTER CONCEPTS
375 BREWER DRIVE
NASHVILLE, TENN. 37211
615-834-1404

SAVE 90%

YES you can save up to 90% on a
computer system of your own.

\$150.00 buys a 4MHz Z80A with
64KB & a real Front Panel

\$200.00 buys a Full Function
24x80 CRT with Keyboard

You can have your own computer and
be running Fortran, Basic, Pascal, etc.
If you get our

**FREE BROCHURE
TODAY**

DIGATEK CORPORATION
Suite 7
2723 West Butler Drive
Phoenix AZ 85021

**ROLL-YOUR-OWN TECHNOLOGY
AND SAVE A BUNDLE**

CIRCLE NO. 125 ON FREE INFORMATION CARD

IBM — XEROX — TRS-80 — CBM
HEWLETT-PACKARD — NORTHSTAR
DEC — HEATH — ZENITH — PMC
OSBORNE — OSI — INTERTEC . . .

WE HAVE



THE CONNECTION

Connect your IBM Selectric*,
IBM Electronic, or Olivetti
typewriter to any Microcomputer.

**UNDER
\$600**

ESCON Products, Inc.

12919 Alcosta Blvd.
San Ramon, Ca. 94583
(415) 820-1256

(800)
227-2148

CIRCLE NO. 126 ON FREE INFORMATION CARD



Z-80 BASED Microprofessor

**A superb learning tool for
students, instructors, hobbyists.**

Complete experimenter's manual, easy
instructions. 18 experiments. Fully ex-
pandable for Z80-CTC, Z80-PIO, EPROM,
bread-boarding and prototyping. Buy 2
for only \$279.95. Money back guarantee.
2KB BASIC available, \$19.00

PLUS-FREE GIFT:

Z-80 Programming and Interfacing
textbook FREE when you order within
7 days. \$12.95 value.

ETRONIX


Dept. PE082
14803 NE 40th
Redmond, WA 98052

OR CALL TOLL-FREE 1-800-426-1044

CIRCLE NO. 127 ON FREE INFORMATION CARD

COMMODORE 64

NEW



VIC 20

NEC PC-8001 Computer \$759.00

RCA VP-3501 Videotex
Data Terminal \$CALL

Scotch 744-ORH Box of 10
SS, SD, O-Sec \$27.00

ADD-ONS: Videx, Microsoft, TKC, Hayes,
Epson, Zenith, Mt. Computer,
UMI, NEC, Sony, Games

Mail Order: FUTRA COMPANY

P. O. Box 4380-PE, Torrance, CA 90510
(213) 328-8951 (800) 421-5006
TWX 910 349-6211 AGENFTRA TRNC

Retail: OMC

20695 S. Western Ave. # 124
Torrance, CA 90501
(213) 328-1760

CIRCLE NO. 128 ON FREE INFORMATION CARD

5 1/4" Floppy Disk Drives

(Direct IBM Plug in)

TANDON Model TM 100-1 \$219.95* ea.

2 or more — \$214.95 ea.*

Floppy Drive Power Connector Kit \$2.00*

Tandon Manual and Schematic \$3.00*

12" Green Phosphor Zenith Monitor \$119.95*

We also stock TM-100-2's, the TM 602S, 603S,
and the 603E Winchester Drives.

CALL NOW - TOLL FREE

800-824-7888 all states except CA.
800-852-7777 for CA residents.
Ask for Operator #99.

MC/VISA or C.O.D. with certified check
or money order. Kansas residents add
3% sales tax.

*Plus shipping.
For info call: 316-683-9225
316-685-9445



923 Longfellow Street
Wichita, KS 67207

CIRCLE NO. 129 ON FREE INFORMATION CARD

CROSS ASSEMBLERS WRITTEN IN FORTRAN IV

NOW AVAILABLE: two different cross-assemblers for each of
the following microprocessors:
6800 6801 6805 6809 68000 8080/85 6502 1802

- Two-pass assembly, w/forward references
- Manufacturer's complete instruction set
- Long error messages, free-format input
- Written in 1966 ANSI standard FORTRAN IV
- "Industrial" Macroassemblers also feature macros, conditional
assembly, relocatable object code

(Target Machine(s))	"INDUSTRIAL" MACRO- ASSEMBLERS	"HOBBYIST" ASSEMBLERS
6809 or 6502	\$400.00	\$200.00
Other 8-bit	350.00	150.00
16-bit	500.00	250.00

Prices include source code on tape and in printed form, User's Manual,
shipping (USA), and program support. All programs shipped
tomorrow!

*** SPECIAL ON PREPAID ORDERS: Same-day EXPRESS MAIL
shipping, for no extra charge. Call today—your program will arrive
tomorrow!

IDI

INTELLIGENT DEVICES, Inc.
P.O. Box 163
Dillon, Colorado 80435
(303) 468-0112

CIRCLE NO. 130 ON FREE INFORMATION CARD

Sinclair ZX81

Software
on
cassette.



MULTIFILE Data Storage System: A versatile multi-purpose
filing system for 16K ZX81. Menu-driven. The number, size and
heading of files are user-definable. Files may be created,
modified, replaced, and searched, and are protected by a
security lock. Output to ZX printer is provided. MULTIFILE is
supplied on cassette with three blank cassettes for data
storage, and packed in an attractive permanent storage case.
Supplied with extensive documentation describing applica-
tions for both business and personal use. \$29.95

ZXAS Machine Code Assembler (16K)	\$9.95
ZXDB Machine Code Disassembler/Debugger (16K)	\$9.95
ZX CHESS! Your choice of 7 levels of play, white or black, set up any position to be analyzed, change levels of play during a game, swap sides, and more. (16K)	\$24.95
INVADERS! Ten levels of play! (16K)	\$9.95
STARTREK Trek across the galaxy. (16K)	\$9.95
ADVENTURE: Damsel and the Beast (16K)	\$14.95
1K PROGRAM PACK, 8 compact, entertaining programs	\$9.95
16K PROGRAM PACK, 4 entertaining programs	\$9.95
10 EXCITING ZX81 PROGRAMS	\$14.95

Books
30 Programs for the ZX81 (1K) \$14.95
Understanding Your ZX81 ROM \$19.95
ZX81 ROM Disassembly Part A \$14.95
Full replacement warranty on all tapes.
Write for our FREE SOFTWARE CATALOGUE for ZX81.

GLADSTONE

Gladstone Electronics 901 Fuhrmann Blvd. Buffalo, NY 14203
Telephone Orders (716) 849-0735 VISA/MC No C.O.D.s please

Mail Orders: Send check, money order, Visa or MC number
\$1.50 per order handling.

CIRCLE NO. 131 ON FREE INFORMATION CARD

RAM

For ATARI

48K RAM BOARD FOR THE 400

- Highest quality available
- Reduces power consumption
- Reduces heat


48K Board (400) \$240
32K Board (400/800) \$100

**INTEC
PERIPHERALS
CORP**

906 E. Highland Ave.
San Bernardino, CA 92404
(714) 881-1533

ATARI, 400, 800 are Trademarks of ATARI, Inc.

CIRCLE NO. 132 ON FREE INFORMATION CARD

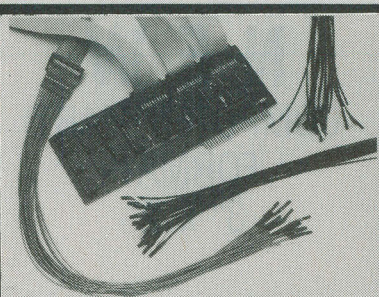

A2-1 LOGIC ANALYZER plugs into the APPLE 2
COMPUTER. It has 60 wirewrap socket probes. 32
input displayed as columns of 1's and 0's on Apple
screen. 16 user programmable outputs, clock
lead, 11 ground leads. BASIC, Pascal, and assem-
bly routines supplied in source form for sample
mode, trisser mode, setting outputs. Also user pro-
grammable. A2-1 card with probe leads, manual, 2
diskettes — \$400.00. Send for free information.

Kanel Corporation

Box 539
Johnson City, New York 13790
607-797-9999

CIRCLE NO. 133 ON FREE INFORMATION CARD



LEO ELECTRONICS, INC.
8921 S. Sepulveda #208
Los Angeles, CA 90045
(213) 641-3101 (800) 421-2418

**WHY PAY MORE? SAVE MONEY!
LOWEST PRICES ON PARTS!**

EPROMS

2708	2.60
2716	4.00
2716-1(350ns)	6.50
TMS 2716	6.00
2732	12.00
2532	12.00

REGULATORS

7805	.75
7812	.75
7815	.75
7905	.85
7912	.85
7915	.85

RAMS

4116(200ns)	8/13.00
4116(150ns)	8/16.00
2114(200ns)	8/18.00

MICROPROCESSORS

Z-80A-CPU	5.50
8080A	3.00
8085A	7.00

TERMS: Check, Visa, Mastercard. Call for C.O.D.
U.S. Funds only. California Residents add 8% Sales Tax.
SHIPPING: Add \$2.00 for Ground \$5.00 for Air.
**ALL MAJOR MANUFACTURERS
ALL PARTS 100% GUARANTEED**

CIRCLE NO. 134 ON FREE INFORMATION CARD



**NOW!
176K
TOTAL
RAM**

For the '89
• 3 MP/M II® Compatible Banks
• "Invisible Disk" CP/M®
Software Included

Only **\$595.00**
MAGNOLIA
MICROSYSTEMS

2264 - 15th AVE. W • SEATTLE, WA 98119
[206] 285-7266 [800] 426-2841

CP/M® & MP/M II® are registered trademarks of
Digital Research, Pacific Grove, CA.

CIRCLE NO. 135 ON FREE INFORMATION CARD

DISKETTES CASSETTES

Error-Free 5 1/4-inch Diskettes (MD-5) single-sided, soft sector, single or double density, reinforced hub.


Item	Qty 10	Qty 50
MD-5	\$25.00	\$110.00
C-10	\$ 7.50	\$ 32.50
C-20	9.00	39.00
C-60	11.50	50.00
C-90	15.00	70.00

UPS SHIPPING INCLUDED
in Continental USA
CA Customers add taxes

MICROSETTE

475 Ellis St., Mt. View,
CA 94043 (415) 968-1604


CIRCLE NO. 136 ON FREE INFORMATION CARD

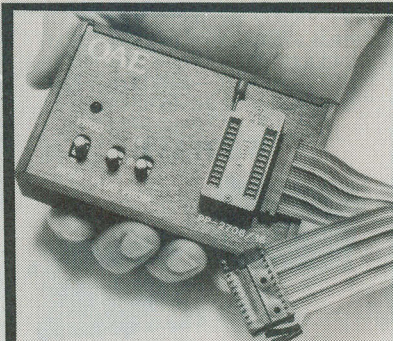

OAE's PP-Series EPROM Programmers plug directly into any vacant EPROM socket and allow you to transfer data directly from RAM to EPROMs. No additional power supplies are required. All timing & control sequences are handled by the programmer. Each unit includes internal DC to DC switching regulator, ZIF socket and 4 ft. ribbon cable terminated with a 24 pin plug. Programmers are available for all EPROMs from 2708's thru 2532's.

Oliver Advanced Engineering, Inc.
676 W. Wilson Ave., Glendale, CA 91203
(213) 240-0080 or Telex 194773
PP SERIES PROGRAMMERS

CIRCLE NO. 137 ON FREE INFORMATION CARD



**RADIO
SHACK
TRS-80™**

and

**HEWLETT-PACKARD
85, 87 & 125 COMPUTERS**

We offer Special Discounts, Free Shipping
and a Toll Free Order Number

1-800-531-7466 TOLL FREE

Pan American Electronics

Dept. P.E. - 1117 Conway Avenue
Mission, Texas 78572
(512) 581-2766 Telex 767339
Branch
2912 North Main St.
Fort Worth, Texas 76106
(817) 625-6333 Telex 794836

CIRCLE NO. 138 ON FREE INFORMATION CARD

SUPER SALE

EPROM's

	1-7	8 up	50 up
2716 (5V, 450nS)	\$3.95	\$3.55	CALL
2732 (5V, 450nS)	7.85	6.95	CALL
2532 (5V, 450nS)	11.20	9.25	CALL

STATIC RAM

6116P-3 (150nS)	7.50	7.20	CALL
2114L-2 (200nS)	2.10	1.70	CALL

DYNAMIC RAM

4164 (200nS)	7.90	7.49	CALL
--------------	------	------	------

MISC

CPU Z80A	\$5.29 ea.
CDP-1854ACE (UART)	\$4.80 ea.
16K RAM Expansion Kit for TRS-80 Mod III	\$12.95/8



SUNTRONICS CO., INC.

12621 CRENSHAW BOULEVARD
HAWTHORNE, CALIFORNIA 90250

STORE HOURS: Mon-Fri 10am to 6:30pm Sat 10am to 5pm
IN CALIFORNIA OUTSIDE CALIFORNIA TOLL FREE

(213) 644-1149 1-800-421-5775

Min Order: \$10. P/H: \$2. Accept VISA, Mastercard, Check or M.O.

TRS-80 COMPUTERS

Model II 64k	\$3288
Model III 16k	\$825
Model III 48k 2 Drives RS232	\$2069
Color Computer 4k Level I	\$308
Color Computer 16k Extended Basic	\$459

EPSON Printers \$CALL

All printers and accessories in stock.

Discount Prices

on full line of Radio Shack & TCS Custom
Computers and Accessories. Call for catalog

Texas Computer Systems

P.O. Box 1327 Arlington, Texas 76004-1327

TOLL FREE 800-433-5184

Texas Residents 817-274-5625

PAYMENT: Money order, cashier's check or
certified check. Prices reflect 3% cash discount.
Call for VISA and Mastercard prices.

CIRCLE NO. 139 ON FREE INFORMATION CARD

NEW!!!

8085 SINGLE BOARD COMPUTERS

SBC85-1

- 2K/4K ROM/EPROM (2516) EPROMs are not supplied.
- 46 I/O lines - parallel/series/handshake
(6 independent ports)
- All CPU control lines are available at the connectors.
- This card is useful for the vast majority of control
applications.
- Price: \$149.00 (assembled and tested)

SBC85-2

- 2K ROM/EPROM (2516/2716) EPROMs are not supplied.
- 22 I/O lines - parallel/series/handshake
(3 independent ports)
- Most CPU control lines are available at the connectors.
- This card is very useful for small control applications.
- Price: \$119.00 (assembled and tested)

The above boards have a CRYSTAL time base, an on-board
regulator, 256 bytes of RAM, 1 timer, and a power on LED
indicator light. Data and internal bus control lines are not
accessible. The boards are supported by complete and
extensive manuals. Access connectors are double row
pin header style. There are solder masks and legends on
top quality p.c. boards.

CER-TEK, INC.
6020 Doniphan Drive
El Paso, Texas 79932
(915) 581-6697

CIRCLE NO. 140 ON FREE INFORMATION CARD

NEW COMPUTER MART FORMAT 3" x 2"

PICTURE YOUR AD HERE!

**NEXT CLOSING DATE:
AUGUST 1**

SHOP OWNERS! SELL POPULAR ELECTRONICS

in your shop and make big
profits on every copy. We pay
all shipping and give you a
FREE display rack. Minimum
order 8 copies/issue.

**FOR DETAILS,
CALL COLLECT:
(212) 725-7518**

Electronics Classified

CLASSIFIED RATES: Per Word, 15 Word Minimum. **COMMERCIAL:** \$3.50. **PERSONAL:** \$2.00. **EXPAND-AD®:** \$5.25. Ads set in all bold type @ 20% premium. Ads set with background screen @ 25% premium. **DISPLAY:** 1" x 2 1/4", \$425.00. 2" x 2 1/4", \$850.00. 3" x 2 1/4", \$1,275.00. **GENERAL INFORMATION:** Frequency rates and prepayment discounts available. Payment must accompany order except credit card — Am. Ex., Diners, MC, VISA (include exp. date) — or accredited ad agency insertions. Copy subject to publisher's approval; must be typewritten or printed. First word set in caps. Advertisers using P.O. Boxes MUST supply permanent address and telephone number. Orders not acknowledged. They will appear in next available issue after receipt. Closing date: 1st of the 2nd month preceding cover date (e.g., Mar. issue closes Jan. 1). Send order & remittance to: Classified Advertising, Popular Electronics Magazine, 1 Park Avenue, New York, NY 10016. Direct inquiries to Rose Lynch, (212) 725-7686.

FOR SALE

GOVERNMENT and industrial surplus receivers, transmitters, snooperscopes, electronic parts, Picture Catalog 25 cents. Meshna, Nahant, Mass. 01908.

ELECTRONIC PARTS, semiconductors, kits, FREE FLYER. Large catalog \$1.00 deposit. BIGELOW ELECTRONICS, Bluffton, Ohio 45817.

SAVE UP TO 50% on name brand test equipment. Free catalog and price list. Salen Electronics, Box 82, Skokie, IL 60077.

TELETYPE EQUIPMENT: Copy Military, Press, Weather, Amateur, Commercial Transmissions. Catalog \$1.00. WEATHER-MAP RECORDERS: Copy Satellite Photographs, National-Local Weather Maps. Learn How! \$1.00. Atlantic Sales, 3730 Nautilus Ave., Brooklyn, NY 11224. Phone: (212) 372-0349.

BUILD AND SAVE. TV EARTH STATION. DETECTIVE ELECTRONICS. Video Recorders, Color Cameras, advanced Telephone Projects. BROADCAST Electronics. 50 page color catalog of unusual electronic projects AIR MAILED \$3.00; with 3 hour audio cassette dramatization of our catalog \$5.00. Don Britton Enterprises, PO Drawer G, Waikiki, Hawaii 96815.

POLICE/FIRE SCANNERS, crystals, antennas, CBs, Radar Detectors. HPR, Box 19224, Denver, CO 80219.

PRINTED CIRCUIT supplies, chemicals, tools, artwork, plating solutions. Major credit cards. Catalog \$2.00, refundable. CIRCOLEX, Box 198, Marcy, NY 13403.

RECONDITIONED TEST EQUIPMENT \$1.00 for catalog. WALTER'S TEST EQUIPMENT, 2697 Nickel, San Pablo, CA 94806, (415) 758-1050.

NEW ELECTRONIC PARTS. Continuously stocked. Stamp brings catalog. Daytapro Electronics, 3029 N. Wilshire Ln., Arlington Hts., IL 60004.

ELECTRONIC CATALOG. Over 4,500 items. Parts, & components. Everything needed by the hobbyist or technician. \$2.00 postage & handling (United States Only), refundable with first \$15.00 order. T & M Electronics, 472 East Main St., Patchogue, NY 11772. (516) 289-2520.

PRINTED CIRCUIT BOARDS, your artwork. Quick delivery. Reasonable. Atlas Circuits, Box 892, Lincoln, NC 28092. (704) 735-3943.

Telephone Listening Device

Record telephone conversations in your office or home. Connects between any cassette or tape recorder and your telephone or telephone LINE. Starts automatically when phone is answered. Records both sides of phone conversation. Stops recorder when phone is hung up. This device is not an answering service.



Each
\$19.95
Qty. Disc Avail.

Super Powerful Wireless Mic

10 times more powerful than other mics. Transmits up to 1/4 mile to any FM radio. Easy to assemble kit. 15V battery (not incl.)

Call (305) 725-1000 or send \$19.95 + \$1.00 shipping per item to USI Corp., P.O. Box PM-2052, Melbourne, FL 32901. COD's accept. For catalog of transmitters, voice scramblers and other specialty items, enclose \$2.00 to USI Corp.



ROBOT KITS, PARTS, MATERIALS, BOOKS. Send \$3 for subscription to catalog and newsletter. ROBOT MART, 19 West 34th St., New York, NY 10001.

SATELLITE TELEVISION... HOWARD/COLEMAN boards to build your own receiver. For more information write... ROBERT COLEMAN, Rt. 3, Box 58-APE, Travelers Rest, SC 29690.

UHF GATED PULSE SUPPRESSED KIT \$39.00. UHF SINEWAVE SUPPRESSED KIT, \$37.00. Both include parts, manual, and Etched Board. Manual only \$4.60. Catalog \$2.00. J&W Electronics, P.O. Box 61, Cumberland, RI 02864.

BEWARE! SATELLITE TV

Before you buy junk hardware slapped together by some outfit in Spider Breath, Montana, you better learn the technology from someone who knows!

S. C. Ku Bands



- Sold Direct
- Two Year Warranty
- Bdcst & mil spec

Spacecoast is the oldest manufacturer and only registered military contractor advertising in this magazine

GET SMART.

It's vital you read our updated 94 page technical information manual used by the office of Consumer Affairs, Rockwell Int., and recommended by NASA. Complete, easy to understand, beautifully detailed. — only \$7.95 today!

CALL 24-hrs. C.O.D. Hotline (305) 339-7600

SPACECOAST

RESEARCH CORPORATION

P.O. Box 442-A, Altamonte Springs, FL 32701



RF POWER TRANSISTOR - TUBE CATALOG FREE. MRF453/MRF455A/SK1451 - \$14.00; MRF454/SRF2072/MRF2769 - \$17.00; MRF245/MRF247 - \$27.00; 2N4048 - \$6.20; Exclusive Repair Center for PALOMAR PRIDE, etc. Westcom, 1320 Grand, San Marcos, CA 92069. (714) 744-0728.

SYSTEM 20



\$289.95
+ \$5.00 shipping

MICROWAVE TV SYSTEM

- Precision 25" Parabolic Antenna
- Prebuilt Converter and Preamp
- Assembled Power Supply
- Low-loss Coaxial Cables
- One Year Warranty
- Completely Built and Tested

DATA SERVICE CO.

3110 Evelyn Street
Roseville, MN 55113
612-636-9469

Buy Gov't Surplus
SAVE To 85%

Send 60¢ For Big Bargain Catalog
1000's of Bargains; Surplus, Excess Inventory, Brand Name New Equipment

COMPRESSORS • WINCHES • GEAR MOTORS
TELEPHONES • WELDERS • POWER PLANTS
SURVEYING INSTRUMENTS • ELECTRONICS
FIRE/BURGLAR ALARMS • PAINT GUNS
TARPS • BINOCULARS • TOOL BOXES
HYDRAULICS • AIR TOOLS • PUMPS

SURPLUS CENTER

Box 82209-PE Lincoln, Nebraska

Zip Code 68501

SATELLITE TELEVISION INFORMATION \$4. Build or buy your Earth Station. Satellite Television, RD 3, Oxford, NY 13830.

FREE CATALOG 99 cent kits. Parts. Bargains Galore! ALL-KIT, 434 West 4th St., West Islip, New York 11795.

FREE KIT CATALOG contains test equipment. Phone 415-447-3433. DAGE SCIENTIFIC INSTRUMENTS, Box 1054P, Livermore, CA 94550.




SATELLITE TV FANTASTIC 80 TV CHANNELS

New antenna construction plans plus big 8 x 11 book loaded with aiming info, kits, LNAs and receivers at wholesale prices. Far better than cable TV! Enjoy crystal clear reception. Send \$9.95 today. Add \$2.00 for 1st class (air mail) or call our 24 hr. COD order line (305) 862-5068 Now.

Global TV Electronics, P.O. Box 219-E, Maitland, FL 32751

SOUND SYNTHESIZER KITS — Surf \$19.95, Wind \$19.95, Wind Chimes \$24.95, Musical Accessories, many more. Catalog free. PAIA Electronics, Box J14359, Oklahoma City, OK 73114.

RESISTORS, 1/4W, 1/2W5% C.F. 3cea., 1% Metal films. NO MINIMUMS, Cabinet Assortments, Quantity Discounts. Details from: JR INDUSTRIES, 5834-E, Swancreek, Toledo, OH 43614.



MICROWAVE TV ANTENNA \$169.95
18" Dish Type Antenna, Probe Mounted
Down Converter, 6 Month Warranty
MICROWAVE TV MANUAL \$16.25
Plans and Concepts
SUBSCRIPTION TV MANUAL \$14.95
Theory, Schematics, Etc.
KITS AVAILABLE
INFORMATION PACKAGE \$2.00
Send Check or M.O. Add 5% Shipping. CA Residents Add Tax.
ABEX, P.O. Box 26601-PE, San Francisco, CA 94126

DECODE Morse, RTTY, and ASCII signals from airwaves with new CODE★STAR. LED readout or connect your computer/printer. Keyboard, other items also available. Kits or assembled. MICROCRRAFT, Box 513PE, Thiensville, WI 53092. (414) 241-8144.

UNSCRAMBLE CODED MESSAGES from police, fire and medical channels. Also telephone recording adaptor. Same day service. Satisfaction guaranteed. Don Nobles Electronics, Inc. Route 7, Box 257-A, Hot Springs, AR 71901. (501) 623-6027.


RF MODULATORS for SATELLITE TELEVISION, MICRO-COMPUTERS CCTV. Also monitors, cameras, kits. FREE VIDEO CATALOG. Phone (402) 987-3771. Dealers Welcomed. ATV RESEARCH, 13-P Broadway, Dakota City, NE 68731.

BUYER BEWARE - Consumer guide to SATELLITE TELEVISION - \$3. Ghostfighters, Route 2, Box 136B, Stevensville, Montana 59870.

CABLE TV CONVERTERS & EQUIPMENT. Plans and parts. Build or buy. For more information send \$2.00: C & D ELECTRONICS INC., P.O. Box 21, Jenison, MI 49428.

MICROWAVE TV DOWNCONVERTERS. Downconverter board, power supply board, Antenna Cookbook, with detailed plans, \$20.00. Downconverter parts \$15.00, power supply parts \$15.00. Micro Engineering, P.O. Box 17231, Minneapolis, MN 55417.

SUBSCRIPTION TV. Sync pulse suppressed systems. Theory/circuits. Educational manual, \$9.95. WORKSHOP, Box 393-PE1D, Bethpage, NY 11714.



Quality Microwave TV Systems

2.1 to 2.6 GHz Ant. 34 db Gain
Complete System as pictured \$149.95
Down Converter Probe
Mnid. Assembled & Tested 64.95
Power Supply (12V to 16V)
Assembled & Tested 59.95
Data Info (Plans) 9.95
Phillips-Tech Electronics
P.O. Box 33205, Phoenix, AZ 85067
(602) 274-2885
MasterCard-Visa C.O.D.'s Special Quantity Pricing

MICROWAVE TV ANTENNAS 2Ghz. Best in the West! Complete with cable, accessories, warranty. \$125.00. Dealers Wanted! GALAXY ELECTRONICS, 6007 N. 61st Ave., Glendale, Arizona 85301. (602) 247-1151.

FREE FLYER! IC's, resistors, capacitors, jacks, etc., plus SSM music synthesizer/audio IC's, power amp modules, analog delay IC's, computer books, and more. Also plans for analog delay/chorus unit! PGS Electronics, P.O. Box 749-A, Terre Haute, IN 47808.

MICROWAVE TELEVISION "DOWNCONVERTERS." Introducing powerful new 5-page design. Easily Assembled. Catalogue: \$2.00 (refundable). NDS, Box 12652-E, Dallas, Texas 75225.

TRANSISTORS, IC's, DIODES, RF Power, LED's. Lowest prices plus service and quality. Call TOLL FREE 1-800-458-6053. In Pennsylvania (814) 837-6820. MC/VISA honored. B&D ENTERPRISES, Box 305, Kane, PA 16735.

CABLE TV CONVERTERS AND EQUIPMENT


BUY DIRECT & SAVE



40 CHANNEL CONVERTER
\$38 Regular \$69

AMATEUR MICROWAVE ANTENNA

- Microwave Parabolic Antenna
- 26 DB Gain
- Advanced Down Converter
- Power Supply Included
- Low-Loss Coaxial Cables
- Complete-Ready to Install



\$119 Elsewhere \$289
Send \$2 for Complete Catalog
Quantity Discount • VISA • COD

VIDEO RESEARCH
PO BOX 19462
LOUISVILLE, KY 40219
For Orders Only 800-626-5533
For Information 502-969-1810

HOME MICROWAVE RECEIVER — Write: "Dealers Wanted", 1739 Douglass Rd., Suite D, Anaheim, CA 92806. (714) 937-0483.

CUSTOM TV SCHEDULES for individual channels: HBO, SHOWTIME, MOVIE CHANNEL. \$18.00 per year, or send for sample. Box 947-PE, Gresham, OR 97030.

1/4 CARBON RESISTORS 2¢ ea. Any variety. Quantity discounts. CI Electronics, P.O. Box 3034, Camarillo, CA 93011.

NEW, UNCUT MOVIES FREE! Receive up to 60 satellite channels on your home receiver. Sporting events, religious programs, other TV stations and more. Catalog \$3. MDS Specialist, Box 67, Southaven, MS 38671.

SHORTWAVE LISTENERS! Free catalog. High quality SWL equipment! RADIO WEST, 3417 Purer Rd., Escondido, CA 92025. (714) 741-2891. The Only all SWL store in the Known World.

The First Low Distortion Car Speakers.

Good news travels fast and sounds great when it's from Speakerlab—now with new speaker systems handmade for your car and featuring polypropylene woofers, custom crossovers, and more. If you have quality car audio electronics DON'T WASTE MONEY on poor speakers. Write for our FREE Speaker Catalog.



speakerlab
Dept. CPE28, 735 N. Northlake Way
Seattle, Washington 98103

OVER 200 PROJECTS and kits, send stamp for list. MATCO ELECTRONICS, Box 316P, Cadillac, MI 49601.

BEARCAT, REGENCY SCANNERS - CRYSTALS: LOW WHOLESALE PRICES! Prompt Service. ALFORD'S, Box 339-PE1, Middlesex, North Carolina 27557, 919-235-3161.

LCD Pen Watches, Credit Card Calculators, Stick-on Clocks, \$8.00 each. Two, \$15.00. \$1.50 postage. A&R TRENDS, 41 Summerfield Drive, Lake Grove, NY 11755.

PC BOARDS: and Components Plus Tools. Quantity: 100 1M Sq inch \$.082 \$.072 \$350. Ea. hole .005 .0045 min. Ea. Au finger .036 .031. Ess Plus. 800-323-1554, IL: 312-456-4709.

10 FREE LED's
Introductory offer: Ten prime T-1 or T-1 3/4 red LED's. \$2.00 value. Include \$1 to help cover postage & handling.

ETRONIX
14803 NE 40th, Dept. PE082
Redmond, WA 98052

ELECTRONIC EQUIPMENT & STOCK from a sound and organ repair business. Only as entire package. Call 607-729-3814.

FANTASY GAME PLAYER? Build this electronic super dice. Absolutely random. Select any even roll from 2-30 and 100. Big digital display. Compact. \$19.95 + \$1.00 postage. Other inexpensive kits. Super prices. Super quality. H Co., Box 455, Sandy, UT 84070.

AMAZING ELECTRONIC DICE GAME — LED display, complete kit \$12.95 — D R DESIGN, P.O. Box 401382, Garland, Texas 75040.

TEST EQUIPMENT, tools, parts, aids. Save. Free catalogue. Color-tech Electronics, P.O. Box 12916, Rochester, NY 14612.

SUBSCRIPTION TELEVISION Microwave Downconverters; UHF Sinewave Systems using Advanced Circuitry and Technology. External TV connections. Fifty other complete Kits available. Send \$1.00 for ALL PLANS AND PRICES to: BETA ELECTRONICS, 2081-G, 3rd Street, Riverside, CA 92507.

ACOUSTIC TEST SET for adjusting equalizers, speakers; \$449.00. Free brochure. HALL ENGINEERING, Dept. 22, P.O. Box 506, Martinsville, N.J. 08836.

NEW! EXPERIMENTAL FREQUENCY CONTROL MODULES. Gated Pulse or Sine Wave. Latest design. Plans, kits, factory built. Revealing information, price lists \$2.00 refundable. LEE-TRONIX, Box 253, Taylor, MI 48180.

ELECTROMAGNETIC MUSIC SYNTHESIZER. Simple, inexpensive to build. Plans only \$4.00. Box 30636, Tucson, AZ 85751.

STOP! DON'T PAY EXTRA! Buy our high-gain 2 to 2.5 GHz Microwave Television Down Converter kit with temperature stabilization and power supply (less transformer) for \$45. Down Converter board and parts, only \$29.95. GUARANTEED! Send payment to: HOPTRONIX, Box 401382, Garland, TX 75040.

CIRCUIT BOARDS, make your own, professional resist process \$17.95 kit. JESKEN ENTERPRISES, 6400 Sycamore, Coloma, MI 49038.

SATELLITE TELEVISION! Super discount prices! Most equipment lines available. Don't delay-call today! COMMUNICATION CONSULTANTS, 501-452-3149.

DISCOVER THE BROOK... Hear the soothing, peaceful sound of this UNIQUE SYNTHESIZER. Complete plans are now available. Incredibly refreshing, thoroughly relaxing. MONEY-BACK GUARANTEE! Send \$4.95 to: Synthesystems, Box 11843, Albuquerque, NM 87192.

LATEST FORMERLY TOP SECRET circuits for pay TV systems. Education Manual \$4.95. Commute, P.O. Box 7200, Costa Mesa, CA 92626.

TRANSFORMERS, 10V-4A \$6.95, 14VCT-3A \$7.50, 36VCT-1.2A \$7.75. All primaries 120V. \$2.50 Shipping. CA residents 6% tax. J. Macswan, Box 4697, Downey, CA 90241.

MICROWAVE TV DOWNCONVERTER, assembled and tested \$44.95, Kit \$29.95, Power Supply Kit \$29.95. Detailed instruction manual included. Satisfaction Guaranteed. Check, M.O., COD. XANDI, Box 25647, Dept. 31, Tempe, AZ 85282.

PINBALL MACHINE Electronics Module, includes display, audio output, schematic, \$24.95. J-TRONIX, Box 1018, Cape Canaveral, Florida 32920.

UHF CONVERTERS — DELUXE Sine Wave UHF Converter. Sound out of TV like normal with only antenna connection to TV or VCR. Kits \$175. 312/267-3455. LSR ENGINEERING, Box 6075, Chicago, IL 60680.

COMPUTER EQUIPMENT

SAVE 90% Build Your own Minicomputer. Free Details. Digatek, 2723 West Butler Dr., Suite 20C, Phoenix, AZ 85021.

USED COMPUTER TERMINALS. Printers, Modems, Surplus Electronic Parts. Catalog \$1.00. SPECIAL: Daisy Wheel Printer \$400.00, Xerox 820 CPU Board \$150.00. RONDURE COMPANY, THE COMPUTER ROOM, 2522-PE, Butler St., Dallas, TX 75235. (214) 630-4621.

APPLESOFT ROM SETS — Original Apple parts, 6 ROMS, includes Applesoft Basic and Autostart Monitor. Converts your Apple II to an Apple II+. Brand new, tested, guaranteed, installation instructions, and insured UPS included \$99. Electrovalue Industrial Inc., Box 157-P, Morris Plains, NJ 07950. Phone 201-267-1117.

APPLE BUILDERS — Send stamp for your flyer of Apple parts. Keyboards, IC sets, ROM sets, connectors, Shugart SA-400 disk drives with Apple modification kits etc. Electrovalue Industrial Inc., Box 157-P, Morris Plains, NJ 07950.

IBM PERSONAL COMPUTER and 8088 boards and plug-ins in kit form. Build it yourself and save. Free information. Compatible Computer Corp., Dept. PE3, Box 51102, Seattle, WA 98115.

BOND CALCULATIONS for TRS-80 Pocket Computer. Price, yield and interest for most securities. Send \$50.00 for programs or \$2.00 for details to: Downum, 1117 Flanders, Garner, NC 27529.

POWER SUPPLIES FOR FLOPPY and hard discs, mini and Micro Computers and many others. Extreme isolation Transformer, for ridding your computer of troublesome line noise. Send for free catalog: XENTEK, O. Drawer 1209, San Marcos, California 92609. (714) 744-3346.

COMPUTER SOFTWARE

MATH/SCIENCE SOFTWARE for TRS-80, PET, Apple II. Write for free catalogue: MICRO-LEARNINGWARE, Box 2134, N. Mankato, Minnesota 56001, 507-625-2205.

AMATEUR RADIO

CALL US FIRST. For low Ham prices. All major brands. DISCOUNTS, DISCOUNTS! Prompt Shipping. Madison Electronics, 1508 McKinney, Houston, TX 77010. Daytime: 1-713-658-0268.

C.B. EQUIPMENT

GET MORE CB CHANNELS AND RANGE! Frequency Expander, speech processors, secret FM converters, how-to books, plans, modifications. Catalog \$2. CB CITY, Box 31500PE, Phoenix, AZ 85046.

BEARCAT Scanners: Sales, Service, Trades (Bearcat only), Save. CRYSTALS: \$2.75. RADIOSALES, 3462 Oakland, Oshkosh, WI 54901.

CABLE TV

39⁹⁵ 30 CHANNEL CABLE TV CONVERTER
ADD \$2.50 FOR POSTAGE

FREE! UNUSUAL 96 PAGE ELECTRONIC PARTS & IDEAS CATALOG!

ORDER No. 198AE047
ETCO ROUTE 9N,
PLATTSBURGH, N.Y. 12901
Tel.: (518) 561-8700.

36 CHANNEL CABLE CONVERTER FOR TV & VTR

\$29⁹⁵ 6 or more 24.95 ea.

Call for free catalog 800-523-0721
Spectrum Electronics, 5932 Market St., Phila., PA 19139

PLANS AND KITS

PRINTED CIRCUIT Boards from sketch or artwork. Kit projects. Free details. DANOCINTHS Inc., Dept. PE, Box 261, Westland, MI 48185.

GIANT SCREEN TV projection system converts any television into 7-foot picture. Lens & instructions \$14.95. (Dealers welcome). Bell Video, 4616 Belair Rd., Baltimore, MD 21206.

FM STEREO TRANSMITTER KIT. Range up to 1/3 mile, broadcast quality, 30 db separation, 300 mv audio input sensitivity. Tunes 88-108 Mhz, highly stable, 50 ohm out. Requires +15V. Complete kit \$9.95. Commercial quality AM TRANSMITTERS also available. Free info. STELLATRON, 4942 Whitsett-205, N. Hollywood, CA 91607. 213/506-0415.

PROFESSIONAL LIMITER-COMPRESSOR-EXPANDER KITS. Pro specs and features, balanced input, adjustable threshold, slope (1:1 to 100:1), attack and release. Models from \$79 and up. Rack mounting available. Free Info. STELLATRON, 4942, Whitsett-205, N. Hollywood, CA 91607.



MINI FM MIC

Compact size only 2" x 1" x 1/2". Transmits to FM radio 88-108 MHz. Exceptional audio quality. Transmits stable signal up to 900 ft. Complete kit incl. case, battery & instructions. Only \$13.95 Assembled \$18.95. Add \$1.55 S&H ea. Send 18¢ stamp for brochure.

S.E. Corp., Box 16969-P
Temple Terrace, FL 33687

NON-COMMERCIAL TELEVISION PROJECTS: UHF SINEWAVE SYSTEMS; 2300 MHZ MICROWAVE DOWNCONVERTER. Best systems available; no internal connections to TV! Plans \$10.00 each; both \$15.00. PARTS, KITS AVAILABLE; MC/VISA accepted on parts purchases. Send SASE for parts pricing and more information on these and other unique plans. COLLINS ELECTRONICS, Box 6424, San Bernardino, CA 92412.

FREE CATALOG OF LOW - cost electronic kits. Sirens, Strobes, Color-Organ, Combination Locks, etc. PPG ELECTRONICS, 791 Redrock Road, St. George, Utah 84770. Call 1-800-453-1708.

TESLA COIL — 40' SPARKS! Plans \$7.50. Information 75 cents. Huntington Electronics, Box 2009-P, Huntington, Conn. 06484.

ATARI-Make your own games, Asteroids rapid fire, Lefthand joystick. Plans \$4.00 each. SSC, Box 170272, Arlington, TX 76003.

CONVERTERS: \$35.00. Commercial free "ALL MOVIE, SPORTS" television adapter. Works in all areas, any television; \$150.00. Satellite Television Handbook; with buyers guide and plans to build your own satellite antenna: \$9.95. Dealership opportunities. Order COD #714-885-8244. Catalog of equipment and semiconductors; \$1.00 refundable. J.D.'s Electronics, Box 2726, San Bernardino, CA 92406.

VIDEO GAMES — Build your own coin operated Video Games. Top money makers. Copyrighted from designer. Send \$9.95 for plans, parts manual and price list. Gold Coast, Box 155, Brooklyn, NY 11236.

CONVERT YOUR TV INTO A GIANT SCREEN PROJECTOR! Free details! Big TV, Box 2595-P, La Habra, California 90631.

SUBSCRIPTION TELEVISION EDUCATION MANUAL. Complete theory and circuits \$9.95. Parts and kits available. D & S Enterprises, P.O. Box 110901PE, Nashville, Tennessee 37211.

TELEVISION to oscilloscope conversion. No modifications to TV. Plans and PC board \$8.50. MICROGRID, Box 613B, Ithaca, NY 14850.

CONVERT YOUR \$2,000.00 oscilloscope into a \$69.99 T.V. monitor. Complete plans \$2.95. Random Access, Box 41770P, Phoenix, Arizona 85080.

ALARMS

Burglar-Fire Protection

Protect Your Life, Home, Business, Auto, etc.
• Our catalog shows how. Install your own alarm systems and devices and save \$\$\$\$! We offer FREE write-in engineering service.
FREE CATALOG Lowest Prices on Reliable, High-Quality Alarm Systems and Devices

Burdex Security Co. Box 82802-PE Lincoln, Ne. 68501

BURGLAR, FIRE, CAR! Finest equipment! Save! Free Catalog. AAS, 186A Oxmoor Road, B'ham, AL 35209.

HIGH FIDELITY

TOP QUALITY SPEAKERS AND KITS. Send \$3.00. Speaker Warehouse, 801 North Route 441, Hollywood, FL 33021.

DIAMOND NEEDLES and STEREO CARTRIDGES at DISCOUNT PRICES for SHURE, PICKERING, STANTON, EMPIRE, GRADO, AUDIO TECHNICA, ORTOFON, ACUTEX, ADC and SONUS. Send S.A.S.E. free catalog. LYLE CARTRIDGES, Dept. P., Box 69, Brooklyn, NY 11218. For fast COD service Toll Free 800-221-0906. N.Y. State (212) 871-3303. 9AM - 8PM except Sunday.

WANTED

GOLD, Silver, Platinum, Mercury, Tantalum wanted. Highest prices paid by refinery. Ores assayed. Free circular. Mercury Terminal, Box 191, Norwood, MA 02062.

ELECTRONIC STORE NEEDS UNUSUAL games, gadgets, and gizmos to sell. SUPPLIERS contact: Dick Day, 402-379-1440, P.O. Box 1187, Norfolk, Nebraska 68701.

WILL BUY ELECTRONIC DEVICES, original designs or completed. Send description only. All replies acknowledged. CIRCUIT WORKS, 1118 7th Ave., Neptune, NJ 07753.

CASH for your Old Calculator! We want to buy Pre-1974 Electronic Calculators, particularly early Sharp, Sony, Victor, TI, Busicom, etc. Reply to: Calculator, P.O. Box 4098, Grand Central Station, N.Y., NY 10163, specify model.

TUBES

TUBES: "Oldies", Latest. Supplies, components, schematics. Catalog Free (stamp appreciated). Steinmetz, 7519-PE Maplewood, Hammond, Ind. 46324.

TUBES-RECEIVING. Industrial and Semiconductors Factory Boxed. Free price sheet including TV, Radio and audio parts list. Transletronic, Inc., 1365 39th St., Brooklyn, New York 11218. Telephone: (212) 633-2800. Toll free: 800-221-5802.

HUGE INVENTORY! Thousands of types. Wholesale prices. FREE CATALOG! ETCO Electronics, DEPT. 290, Plattsburgh, NY 12901.

GOVERNMENT SURPLUS

SURPLUS JEEPS, CARS AND TRUCKS AVAILABLE. Many sell for under \$200. Call: 312-742-1143, Ext. 4649, for information on how to purchase.

"GOVERNMENT SURPLUS" Electronics, Jeeps \$30.00! 800,000 Items! Complete Information Your Area. Largest OFFICIAL Directory. \$3.00. SURPLUS (A176), 4620 Wisconsin Northwest, Washington, DC 20016.

PERSONALS

MAKE FRIENDS WORLDWIDE through international correspondence, illustrated brochure free. Hermes-Verlag, Box 110660Z, D-1000 Berlin 11, W. Germany.

CORRESPONDENCE FOR FRIENDSHIP IN PHILIPPINES, MALAYSIA. Free information. AAWs-(PE), Box 2777, Orcutt, California 93455-0777.

PENFRIENDS — ENGLAND — USA, through correspondence. Send age, interests. Free reply. Harmony, Box 89PE, Brooklyn, New York, 11235.

CORRESPONDENCE for friendship! Mexico, Philippines, Europe, USA. Free information. International, Box 1716-EL, Chula Vista, CA 92012.

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.'s... Free revealing details, Counseling, Box 317-EP8, Tustin, California 92680.

UNIVERSITY DEGREES BY SPECIAL EVALUATION of existing credits and Job experience. Fast, inexpensive. Call (614) 863-1791. Or write: EVALUATION, Box 13151-A5, Columbus, Ohio 43213.

INSTRUCTION

UNIVERSITY DEGREES BY MAIL! Bachelors, Masters, Ph.D.'s. Free revealing details. Counseling, Box 317-PE08, Tustin, California 92680.

LEARN WHILE ASLEEP! HYPNOTIZE! Astonishing details, strange catalog free! Autosuggestion, Box 24-ZD, Olympia, Washington 98507.

LEARN ELECTRONIC ORGAN SERVICING at home. Completely revised course covers latest models including digital, LSI's, synthesizers, etc. NILES BRYANT SCHOOL, PO Box 20153, Sacramento, CA 95820.

Be an FCC LICENSED Electronic Technician

Earn up to \$600 a Week & More!

No costly school — The Original FCC Tests. Answers exam manual that prepares you at home for FCC General Radiotelephone License. Newly revised multiple-choice exams cover all areas tested on the actual FCC Govt exam! No previous experience required. \$12.95 post-paid. Moneyback Guarantee.

Dept. P P.O. Box 26348, San Francisco, CA 94126



MEDICAL ELECTRONICS TECHNOLOGY, home study. Troubleshoot medical instruments. WTI, P.O. Box 3124, Fresno, CA 93650-3124.

YOUR OWN RADIO STATION! AM, FM, cable, licensed, unlicensed, low cost transmitters! Free information. Broadcasting, Box 130-A8, Paradise, CA 95969.

NONRESIDENTIAL UNIVERSITY DEGREES

Bachelors, Masters, Doctorates, for the accomplished individual. State-authorized, inexpensive, efficient. Richard L. Crews, M.D., President

COLUMBIA PACIFIC UNIVERSITY

150 Shoreline, Suite 3008 • Mill Valley, CA 94941
Call Toll Free USA: 800-227-1617, ext. 480
California Only: 800-772-3545, ext. 480

ACCREDITED AIRCRAFT A + P., Electronics, Flight Schools, 11 months. All work on certified aircraft. Aero Technicians, Box 7PE, Rexburg, ID 83440. (208) 356-4446.

UNIVERSITY DEGREES BY SPECIAL EVALUATION of existing credits and Job Experience. Fast, inexpensive. Call (614) 863-1791. Or write: EVALUATION, Box 13151-A5, Columbus, Ohio 43213.

POWERFUL NEW KEYBOARD PLAYING COURSE. Exciting Benefits. Free Details, Write: ProMusic, Box 86K, Brookfield, CT 06804-0086.

FOR INVENTORS

INVENTIONS WANTED

FREE CONSULTATION • NO IDEA TOO SMALL

Disclosure registration. Potential cash or royalties from manufacturers seeking new ideas. For free information on how to register your ideas call or write

AMERICAN INVENTORS CORP.

59 Interstate Dr. Dept PE
West Springfield, MA 01089 (413) 737-5376
A Fee Based Marketing Company

IDEAS, inventions, new products wanted! Call toll free 1-800-528-6050. In Arizona, 1-800-352-0458. Extension 831.

BUSINESS OPPORTUNITIES

FREE CATALOGS. Repair air conditioning, refrigeration. Tools, supplies, full instructions. Doolin, 2016 Canton, Dallas, Texas 75201.

MECHANICALLY INCLINED individuals desiring ownership of Small Electronics Manufacturing Business — without investment. Write: BUSINESSSES, 92-K8 Brighton 11th, Brooklyn, New York 11235.

ERASE DEBTS with little-known law — create wealth!! Details FREE — Blueprints, No. EE8, LaGrangeville, NY 12540.

MAILORDER OPPORTUNITY! Start profitable home business without experience or capital. Information free. Mail Order Associates, Dept 770, Montvale, NJ 07645.

ONE MAN CRT FACTORY. T.V.'s, Business machines, Monitors, Scopes, VDT's. \$3.00 rebuilding nets \$100-\$500 each tube. Higher profits overseas. New/used. FACTORY, 1909 Louise, Crystal Lake, IL 60014. (815) 459-0666.

LCD WATCH \$2.50. Pen watch \$3.60. Catalogue \$1.00: RELIANT ENGINEERING COMPANY, Box 33610, Sheungwan Post Office, Hong Kong.

\$25,000 - INTEREST FREE!!! Keep indefinitely! FREE report. Write: American, 1601 Main Street, Plainfield, Indiana 46168.

PICTURE TUBE REBUILDING equipment new and used. ATOLL TELEVISION, 6425 Irving Park, Chicago, Illinois 60634. (312) 545-6667.

MAKE MONEY SELLING ELECTRONICS. Wholesale dealer catalog \$5. (redeemable). ETCO, Dept. 532, Box 840, Champlain, NY 12919.

BORROW \$30,000 without interest! All eligible. Repay anytime. Free details. Infohouse, Box 1004 — PE8, New York, NY 10003.

CASH IN ON EXPLODING HOME COMPUTER MARKET. Become a distributor. Investment of only \$536 includes TEXAS INSTRUMENTS home computer. Start building your business now! FREE details. Send S.A.S.E.: COMPUTER-PE, 24431 Los Serranos, Laguna Niguel, CA 92677.

1,104.00 MONTHLY, immediate cash profits, paid daily!!! Guaranteed. Scott Sauer, Box 661, Dept. X, Schoolcraft, MI 49087.

FREE BOOK "2042 Unique Proven Enterprises." Fabulous "unknowns," second inflation income. Haylings-M. Carlsbad, CA 92008.

EMPLOYMENT OPPORTUNITIES

ELECTRONICS/AVIONICS EMPLOYMENT OPPORTUNITIES. Report on jobs now open. Details FREE. Aviation Employment Information Service, Box 240E, Northport, New York 11768.


Classified Adv Contd on Page 96

ELECTRONICS WORLD[®]

Personal Electronics News

HANDHELD ELECTRONIC GAMES have been forced to become more innovative in order to compete with the proliferation of arcade video games. According to Nick Underhill of Entex Industries, a major manufacturer of handheld games, players are becoming increasingly sophisticated and are now often quicker than the computer. Although the cost for a given level of game complexity has fallen with the cost of the chips that make the game work, the players are demanding more advanced games, which pushes the price back up. Entex's response has been a relatively low-priced system called AdventureVision, whose 6000 pixel dot-matrix display resembles a TV screen, and is said to be able to reproduce any graphics "from space mutants to the Mona Lisa." Players select from among Entex's game cartridges and control the action with a joystick in one- or two-player modes.

A ROBOTICS CENTER is being established at the University of Rhode Island. An outgrowth of a project supported by the National Science Foundation and more than 30 industrial firms, it is intended to be an experiment in university-industry cooperation. A four-year NSF grant to URI of \$700,400 will be matched in the first year by contributions from the firms now involved in the project, with other firms expected to join later. The center should be totally supported by industry after four years.

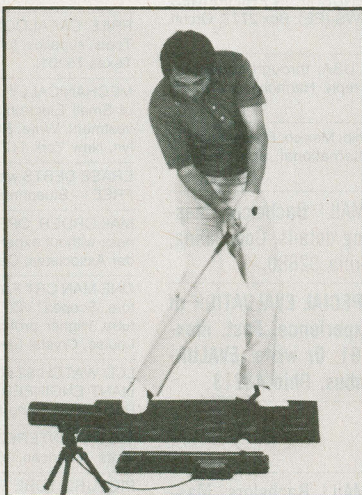

GOLFERS IMPROVE THEIR GAME, according to Mitsubishi Electric, by using Mitsubishi's portable GL-500 base mat. The unit incorporates four sensors and a micro-computer to compute data about how you have hit the ball on the mat. Upon taking a swing, such parameters as head speed, face angle, hitting area, club-head swing, carry, ball driving direction, etc., are digitally displayed—letting you quantify your errors. All clubs, from driver to putter, can be used. The GL-500 is now on sale in Japan, with U.S. sales expected soon, either under the Mitsubishi name, or by OEM agreement. Perhaps the next development we can expect is a robot caddy, or maybe an android golfing partner who will give us tips on the stock market—electronically, of course.


"SMART CARDS", developed by Intelmatique of France, may soon replace Food Stamps, according to Richard Sprague of the U.S. Dept. of Agriculture. The cards, with microcircuits printed on them, can be interfaced to a central computer via a terminal at the point of purchase, which then records the transaction on the card itself. The Reagan administration is said to be interested in issuing "Smart Cards" to welfare recipients in order to eliminate paperwork and reduce fraud.

CUBAN RADIO INTERFERENCE was again the subject of testimony given before the House Commerce Subcommittee on Telecommunications. John B. Summers, Executive Vice President and General Manager of the National Association of Broadcasters, explained that the Reagan Administration's proposal to broadcast to Cuba on the 1040 AM frequency via Radio Marti might provoke Cuban "counter programming" on the same frequency and power level (500 kW), causing interference to stations throughout the U.S. operating on that channel. An alternative, according to Summers, would be to operate Radio Marti at 1610 or 530 kHz since Cuban AM receivers could pick up the broadcasts readily and no U.S. commercial stations currently operate on those frequencies. Of course, said Summers, the Cubans can interfere with whatever frequencies they choose to simply by turning a dial. That's why a diplomatic solution is said to be imperative.

Give your system some NEC, and watch its performance soar.

NEC's crisp, clear, high-performance JC1202 RGB color monitor, an industry standard. Also available: the JC1201 composite video version.

NEC's classic green monitor, (JB1201), one of computing's performance legends. Non-glare screen, easy on the eye. And the checkbook.

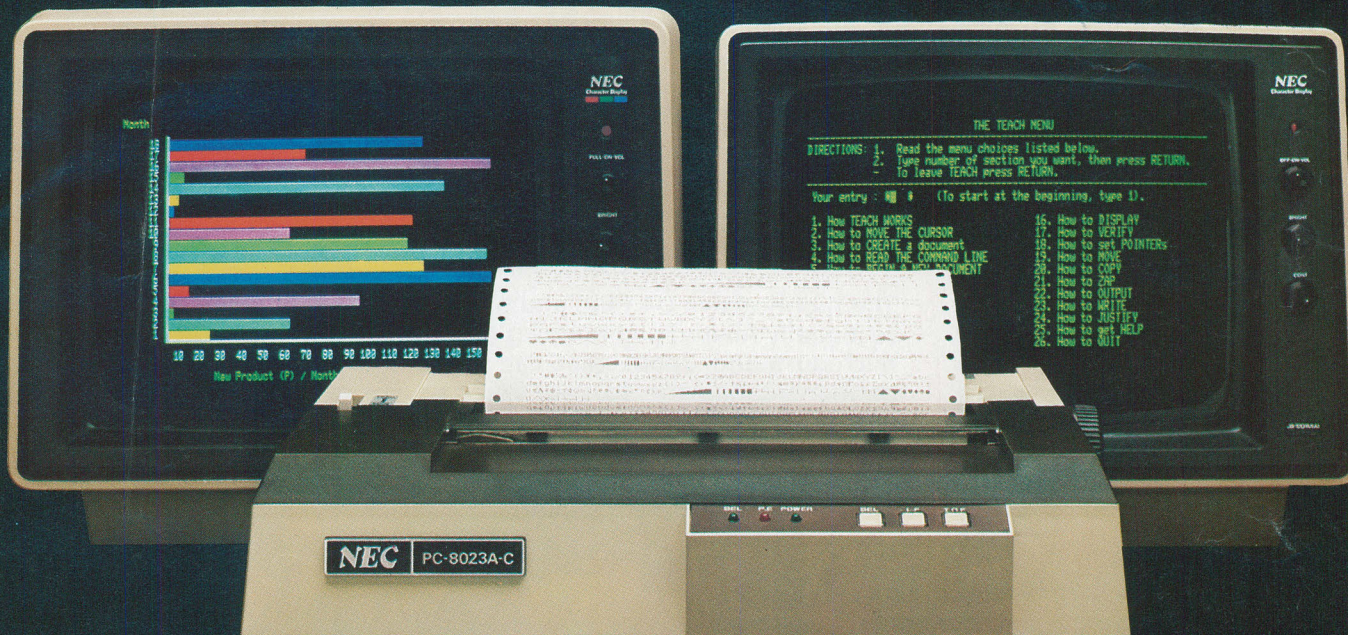


The impressive new NEC dot matrix printer. Parallel interface, 100 cps, 2K buffer, pin or friction feed. Stunning performance and versatility in the hottest new peripheral of the year.

Peripherals from NEC can make almost any computer system better.

Owners of Apple®, Radio Shack®, Atari®, IBM®, and many other personal computers will find their equipment to be compatible with NEC's famous monitors, as well as our highly-featured new PC-8023A dot matrix printer. (Some configurations may require a different interface.)

Ask your dealer for a demonstration.

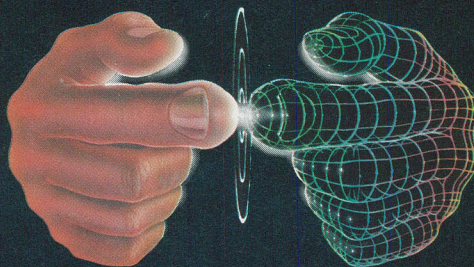

**Productivity
at your fingertips**


NEC

**NEC Home Electronics (USA)
Personal Computer Division**

1401 Estes Avenue
Elk Grove Village, IL 60007


CIRCLE NO. 35 ON FREE INFORMATION CARD

Protect Your Stereo System and Maintain Its Sound

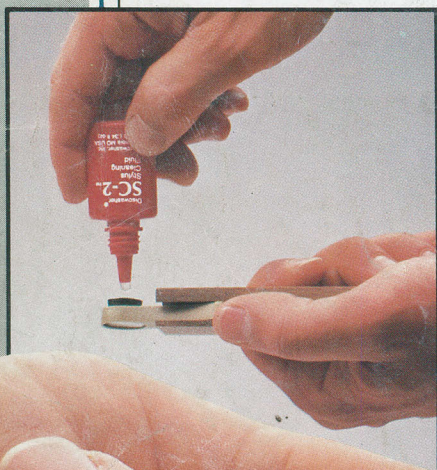

The D4™ Record Care System

The highly active D4 fluid and unique directionally fibered pad removes harmful microdust and debris that can cause permanent damage to your recordings.

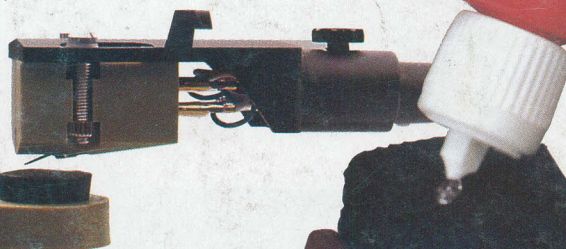

The SC-2™ Stylus Care System

SC-2 fluid with the exclusive nylon fibered brush effectively loosens and wipes away stylus contamination, a major contributor to record wear.



The Discwasher® D4 Record Care System and the Discwasher SC-2 Stylus Care System are available separately or together as DiscSet™.

discwasher®
PRODUCTS TO CARE FOR YOUR MUSIC

For a free copy of our "Guide To Record Care" write to Discwasher.

1407 North Providence Road, Columbia, MO 65201 USA
A DIVISION OF JENSEN an ESMARK Company

CIRCLE NO. 11 ON FREE INFORMATION CARD